



L I G H T I N G

P R O F E S S I O N A L C O L L E C T I O N

INTRODUCING LYK

LYK Lighting - Your Trusted Lighting Partner, Illuminating Perfect Living Spaces.

More than just a LED lighting supplier, LYK Lighting is your reliable companion in creating unique and impressive living spaces. We combine the essence of technology and the art of lighting to offer bespoke solutions for every project, from luxurious villas to cozy apartments, from magnificent hotels to modern offices.

At LYK, you'll find exactly the lighting solution you need for your project with brands like Kim Phát Led (KP Led), LamaN lighting, Hilykan, and Govee. Our team of experts is always ready to accompany, advise, and support you throughout the entire process, from product selection to installation and warranty.

LYK - Illuminating spaces, inspiring lives.



LIGHTING & ARCHITECTURE

Playing an indispensable role in interior design, a well-designed lighting scenario that complements the architecture and interior style can elevate any space to new heights of sophistication and perfection.

Renowned designers have affirmed that "The art of light arrangement is to infuse life into interior spaces."

Recognizing the ability of lighting to resonate with emotions and local cultural nuances, creating unique and distinctive spaces, major investors in Vietnam have come to understand the crucial role of lighting in their projects and are willing to allocate significant budgets to achieve optimal lighting effects.

LYK CULTURE

PURPOSE

1. To create creative and professional lighting solutions, partnering with architects and construction companies to enhance the value of architectural spaces.
2. To become a trusted partner, providing high-quality LED lighting products that meet international market standards.

VISION

Our vision is to become a trusted partner and leader in the lighting industry – where customers find the perfect combination of creativity and sustainability.

MISSION

1. We strive to deliver suitable and sophisticated lighting solutions that precisely meet the customer's ideas.
2. Transparency, prestige, and quality are at the forefront of every project we do.
3. To respect the uniqueness and personality of each architectural space.

VALUES

Dedication | Clarity | Prestige | Creativity | Trust



LYK IS UNIQUE

1

Comprehensive Collaboration with Architect and Construction Partners

LYK Lighting focuses on collaborating with architect and construction companies to deliver the most optimal and comprehensive lighting solutions.

2

Unwavering Commitment – NEVER SAY NO

We are dedicated to finding complete, flexible, and tailored solutions that meet every customer requirement.

3

Pioneering Creativity and Innovation

LYK Lighting continuously improves and innovates to deliver modern lighting products and solutions that lead market trends.

4

Pre- and After-Sales Service

Pre-sales: Lighting design consultation, product selection to meet all needs, and installation support.
After-sales: Delivery to your doorstep, on-site warranty service, and flexible and prompt product exchanges/returns.

5

A Young, Creative and Passionate Team

The LYK Lighting team comprises dynamic and passionate experts who are ready to partner with you on any lighting project.

MANUFACTURING

LYK owns a direct manufacturing and processing facility in Ho Chi Minh City, equipped with experienced technicians and a modern production line.

In addition to commercial LED products, LYK also has a research and development department dedicated to creating unique LED designs. Our products are meticulously handcrafted through every stage: soldering, molding, wood turning, milling, and painting.



RESEARCH & DEVELOPMENT



At LYK, we celebrate innovation and creativity. While continuously improving our existing products, LYK is always seeking new lighting solutions with our R&D team comprised of passionate engineers with deep knowledge in the lighting field.






MAKE YOUR DESIGN COME TRUE

Color Rendering Index (CRI)

Full-spectrum LED testing according to TM-30-15

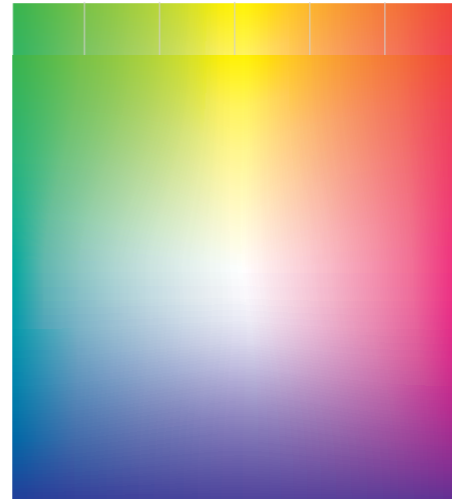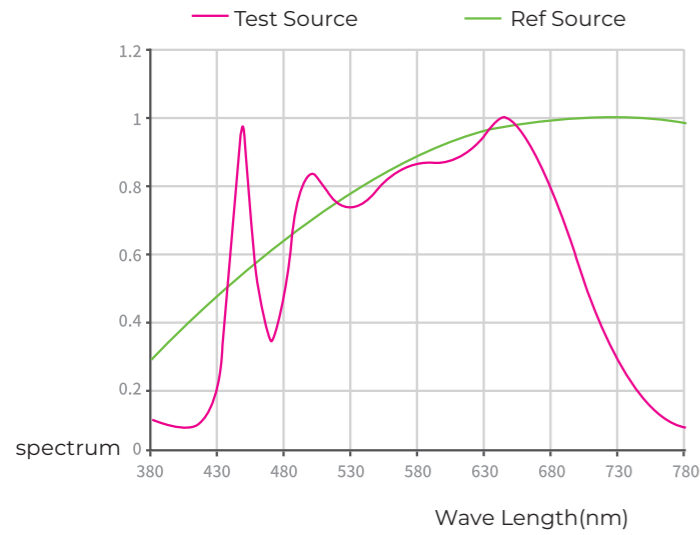


CRI comparison

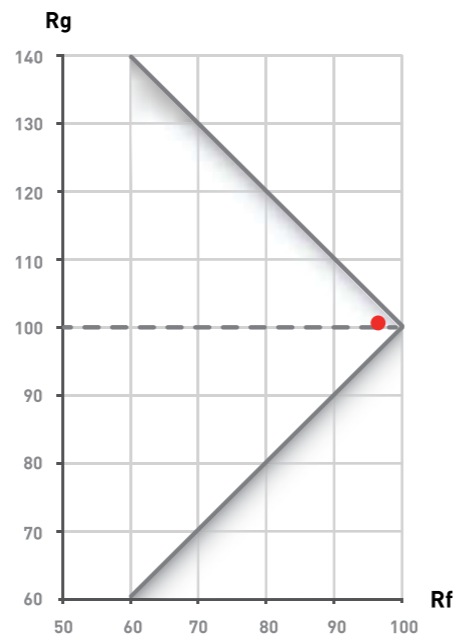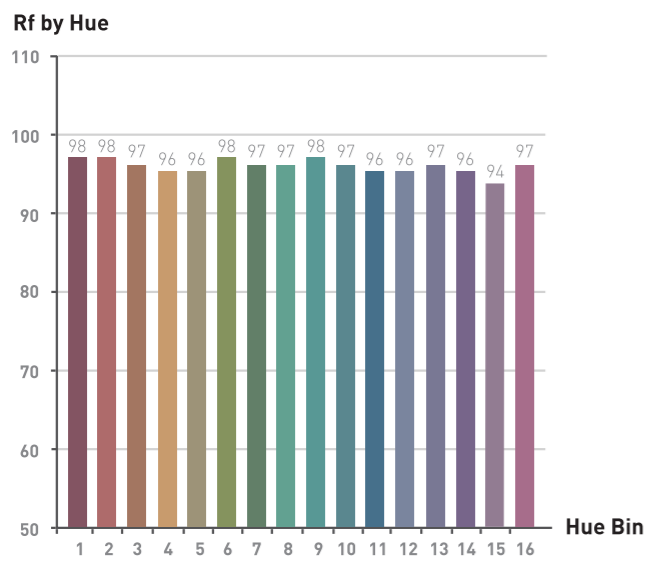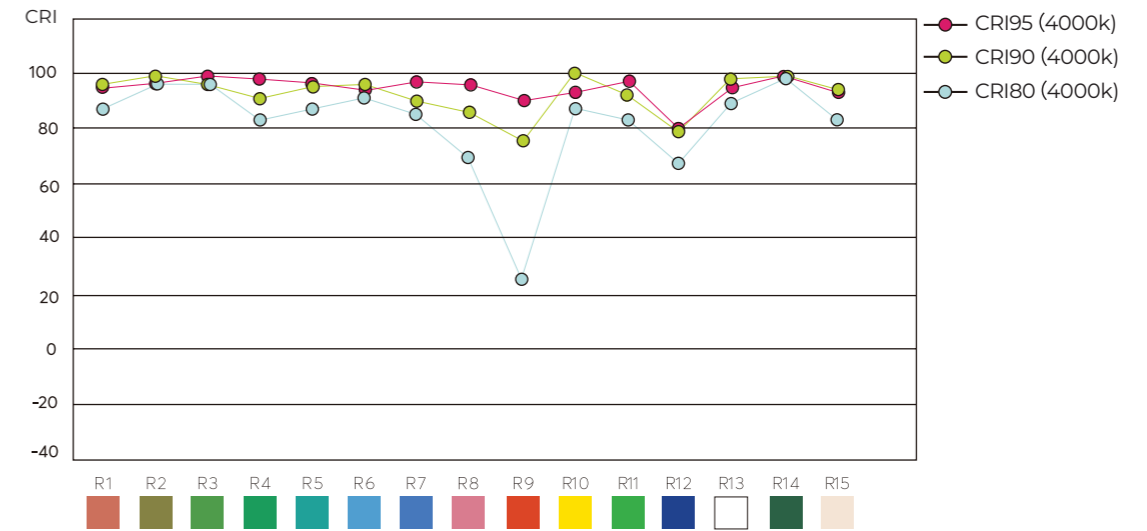


Natural light like sunlight

Colors are rendered as true as natural sunlight when using lamps with a Color Rendering Index (CRI) of 95 or higher and a full spectrum.

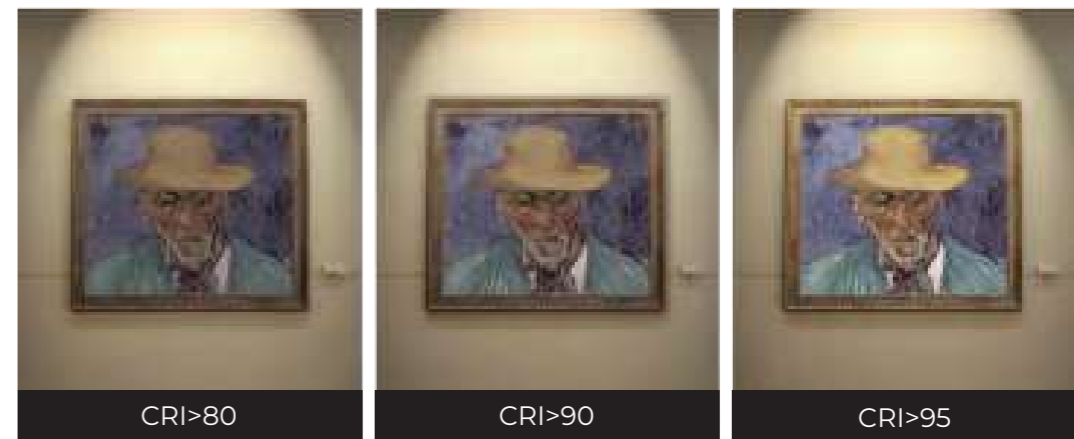

Lighting Applications


A wide range of color temperatures (CCT) caters to various environments from workspaces to living rooms

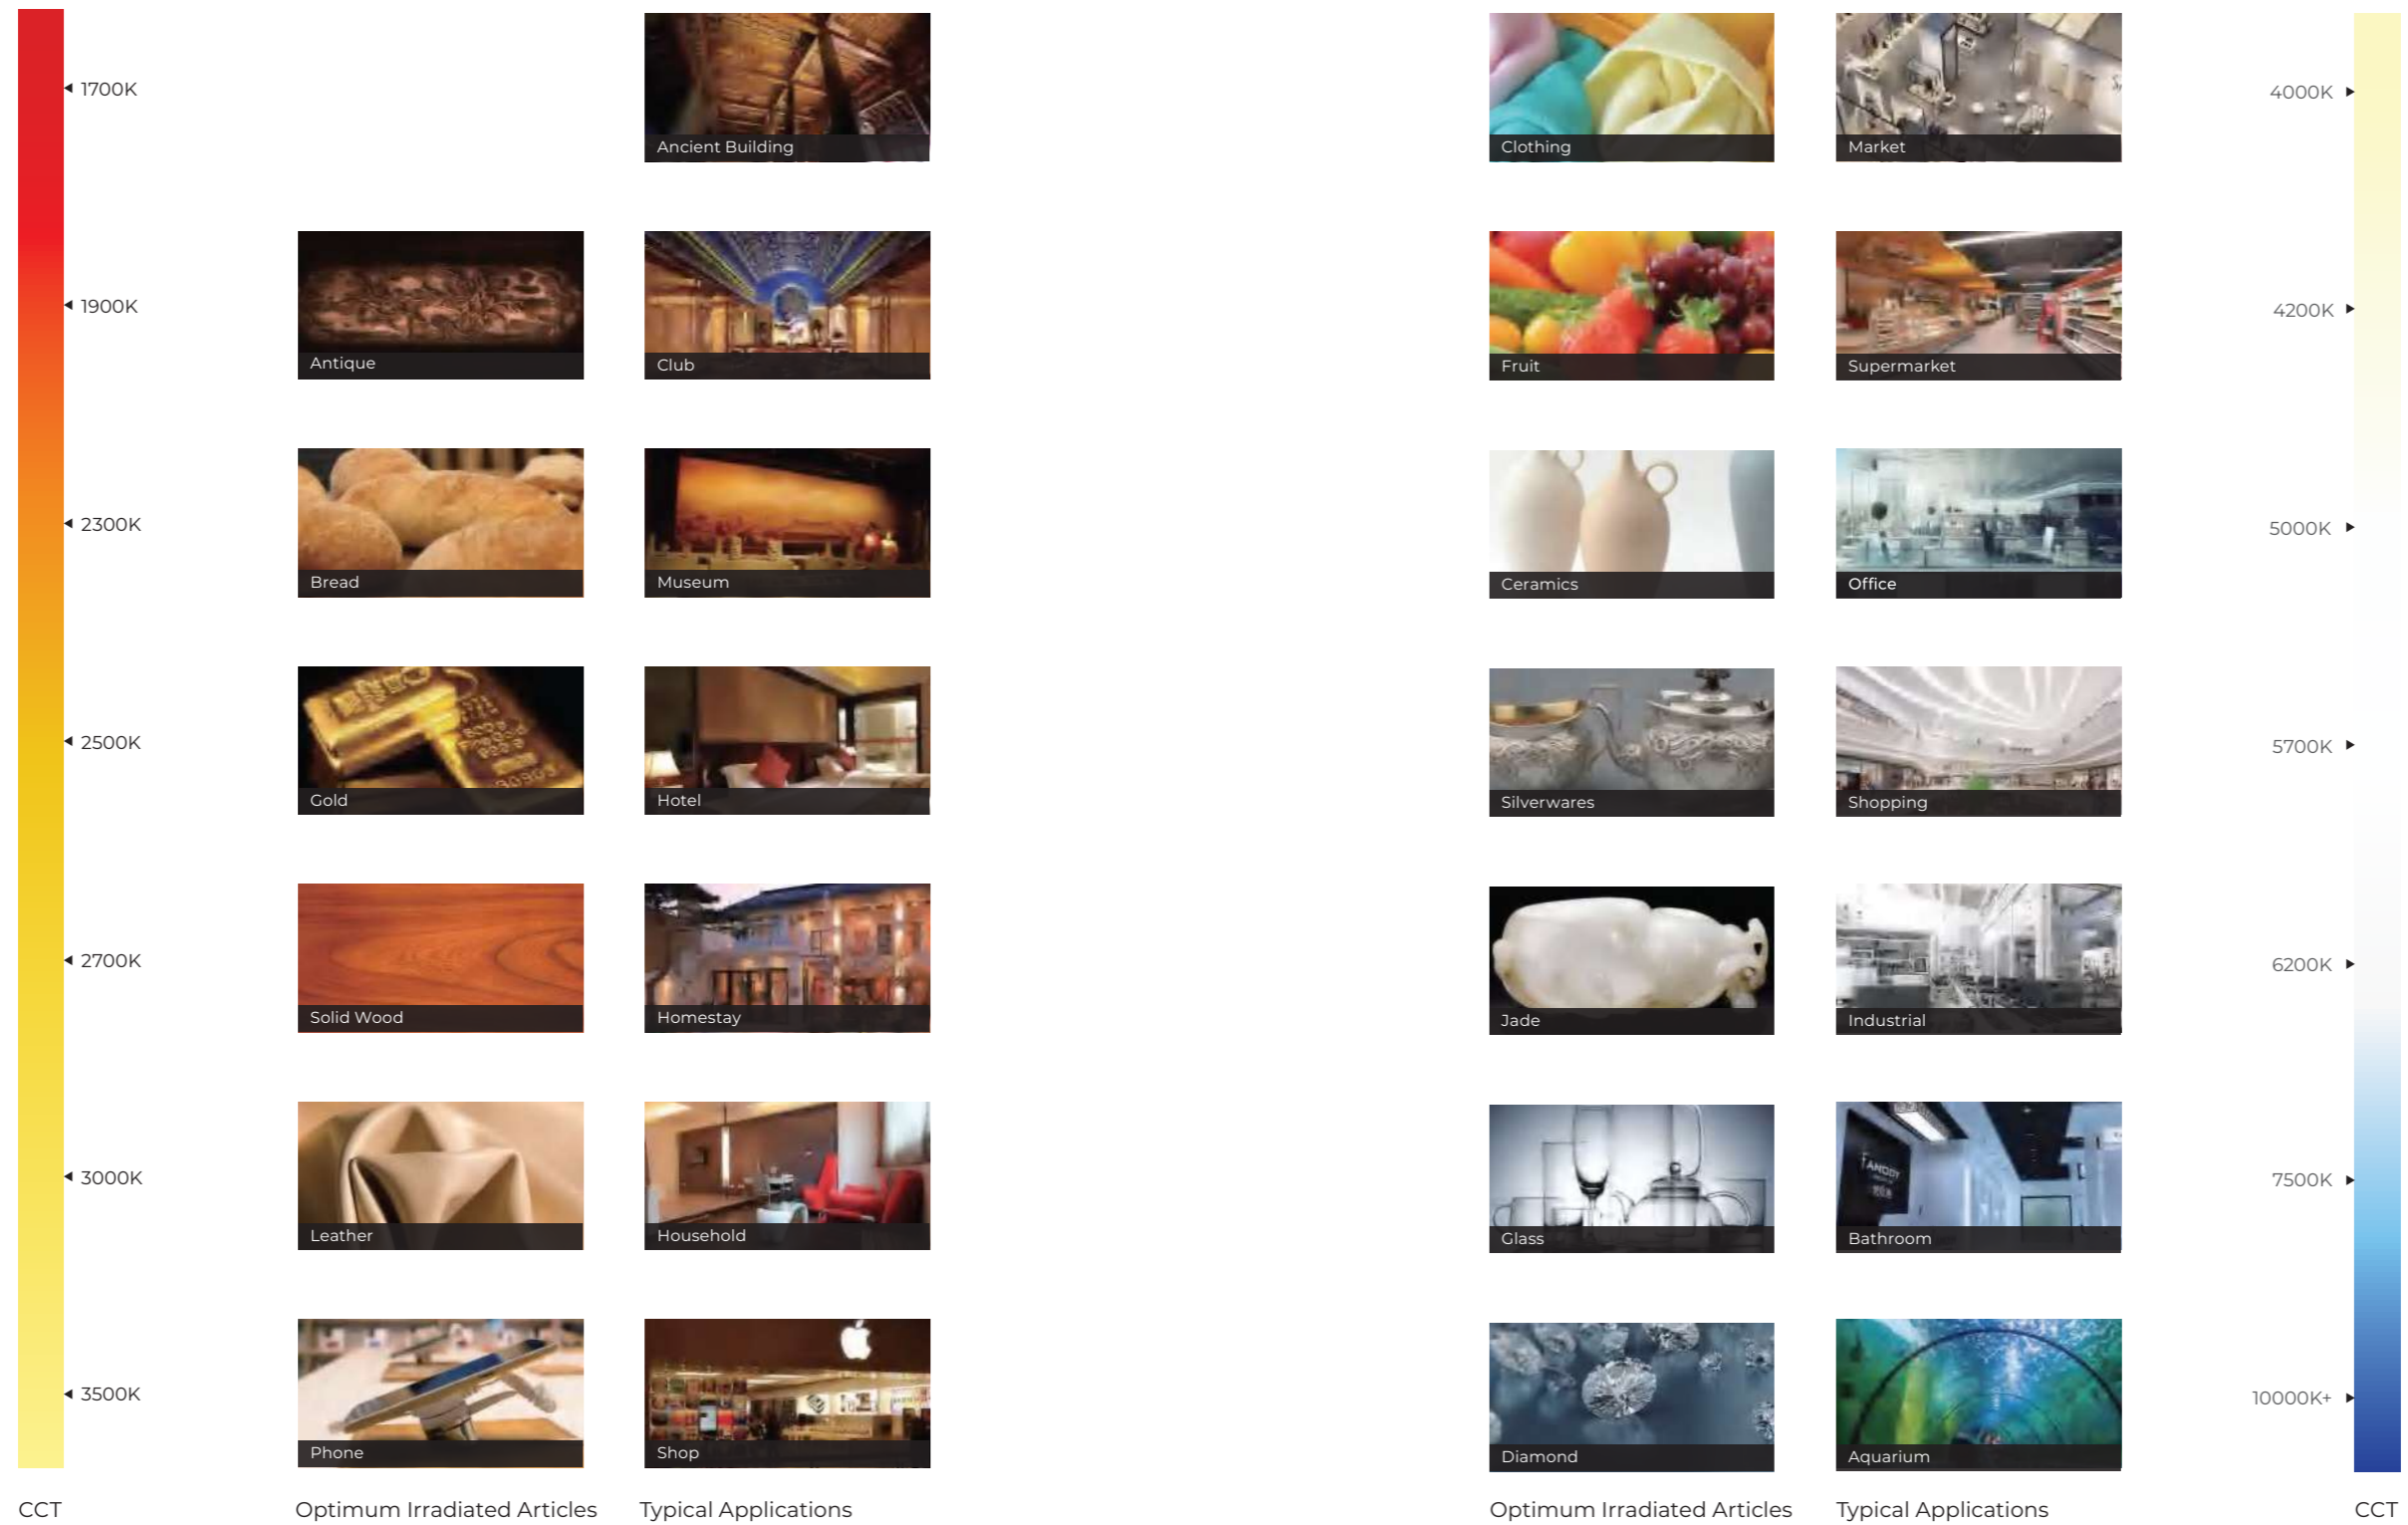

Binning


Spectroscopic standard of LYK

Complied with international ANSI standard, COLORS divides every CCT into 2 or 3 bins, at 2-step Mcadam ellipse at least, to ensure customers to get the same color of light even for different orders.

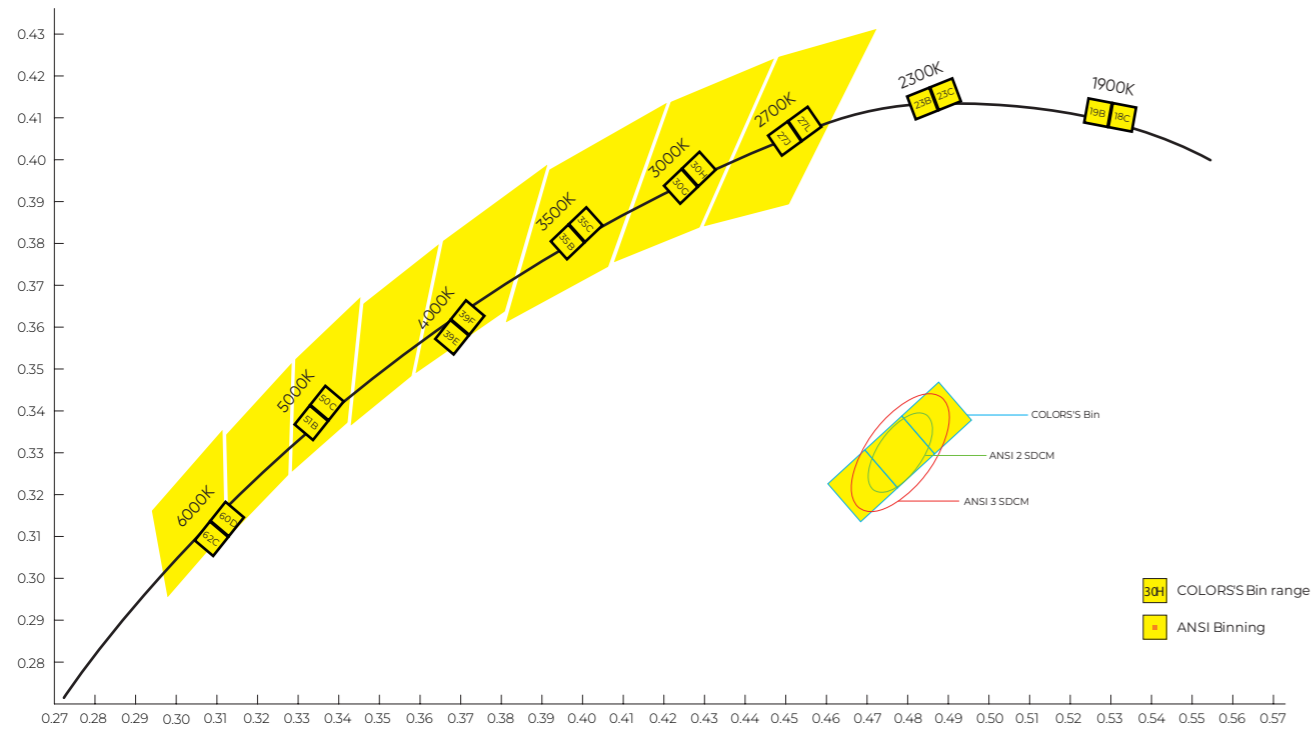

SDCM <2

SDCM <2, no visual difference among products of the same batch

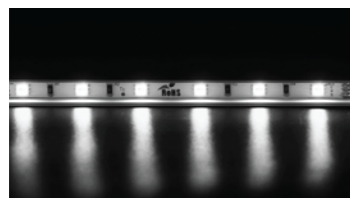

2-step Mcadam Ellipse



3-step Mcadam Ellipse




5-step Mcadam Ellipse



7-step Mcadam Ellipse

A variety of colors for your choice

Customize any color, wavelength, CCT, and BIN coordinate of LED in addition to conventional color, CCT and BIN.

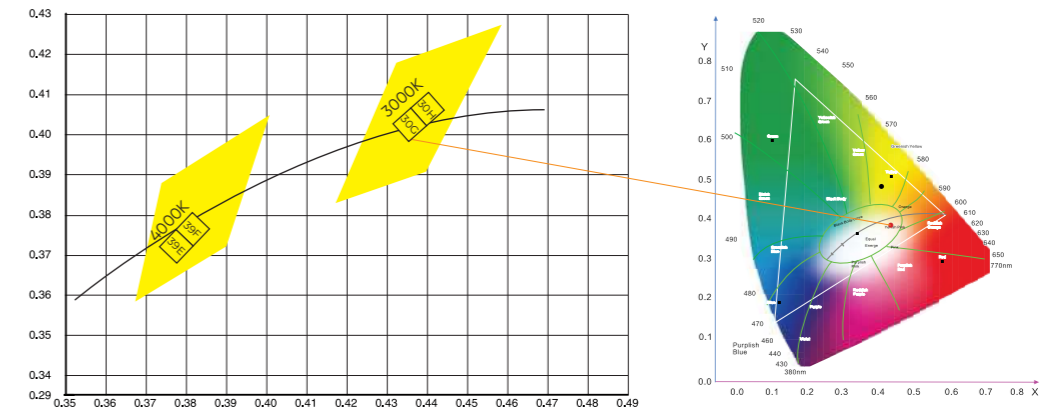

LYK Assurance

Customer-specific Bin management
Always the same Bin for different batches
One bin, 2-step, No visual difference forever

1 BIN ONLY	2 Step SDCM	VIP Same Forever
------------------	-------------------	------------------------

PRODUCT CATALOG

Interior

Recessed light 019 - 036




Ceiling mounted light 037 - 046




Track light 047 - 058



Magnetic track light 059 - 078

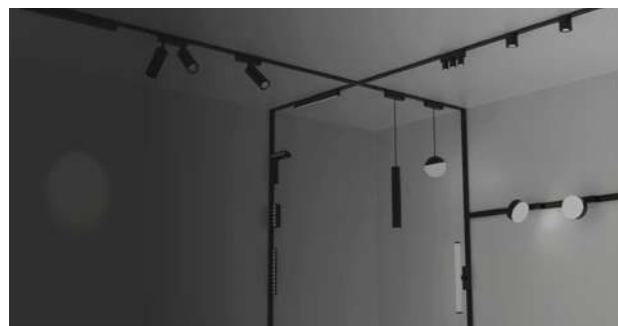

Wall light 079 - 090

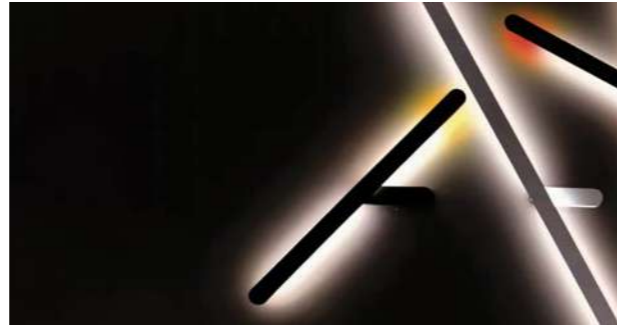


Reading light 091 - 120



Strip light 121 - 134



Aluminum profile 135 - 158

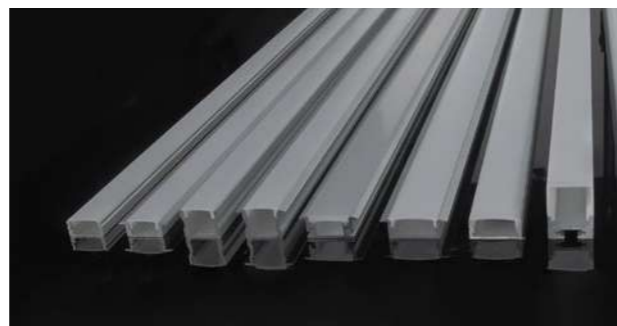

Exterior


Ceiling light 159 - 168



Wall light 169 - 208




Step light 209 - 224

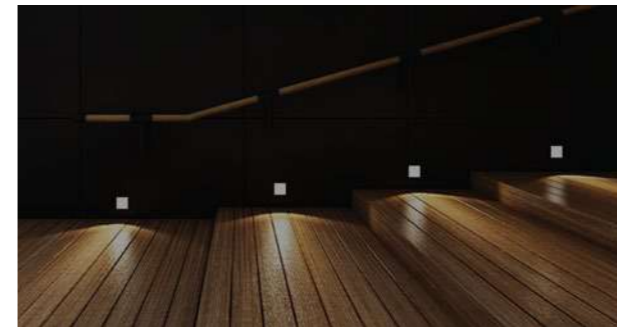

Spotlight 225 - 238



Bollard light 239 - 256

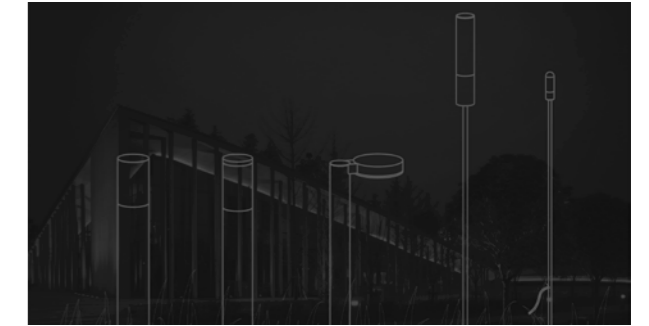

Inground light 257 - 270



Underwater light 271 - 294




RECESSED LIGHT

7140	023
7710	023
0013	024
8314	024
P339	025
7500	025
7507	026
DPHY3W	026
T2	027
LK	027
FWY	028
FZ	028
7703	029
FMZ063	030
SL74161	031
SL74078	031
FL76008	032
FL76027	032
FL76001	033
FL76002	033
FL76003	034
FL76004	034
FL76035	035
DL73027	035






7140 | Recessed light



DIMENSION (mm)



POWER SUPPLY
220-240V DC


LUMEN EFFICACY
80lm/W

CRI (Ra)
> 90


CUT OUT (mm)
Ø75

Light distribution


5W-10° 3000K

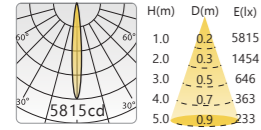

5W-20° 3000K

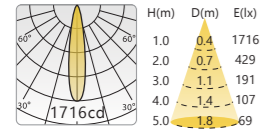


5W-30° 3000K

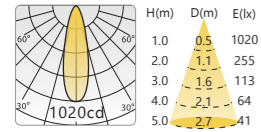


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 5W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 10°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 7W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 15°	<input type="checkbox"/> DIM Triac
	<input type="checkbox"/> 10W	<input type="checkbox"/> 4000K	<input type="checkbox"/> 24°	<input type="checkbox"/> DIM Bluetooth
		<input type="checkbox"/> 5000K	<input type="checkbox"/> 36°	<input type="checkbox"/> DIM DALI
		<input type="checkbox"/> 6000K	<input type="checkbox"/> 40°	<input type="checkbox"/> DIM Zigbee

7710 | Recessed light



DIMENSION (mm)



POWER SUPPLY
220-240V DC


LUMEN EFFICACY
80lm/W

CRI (Ra)
> 92


CUT OUT (mm)
Ø75

Light distribution

3W-15° 2700K

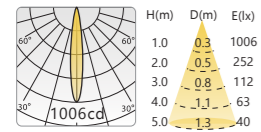

3W-24° 2700K

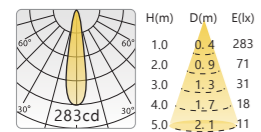

Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 3W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 15°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 5W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 24°	<input type="checkbox"/> DIM Triac
	<input type="checkbox"/> 7W	<input type="checkbox"/> 4000K	<input type="checkbox"/> 36°	<input type="checkbox"/> DIM Bluetooth
		<input type="checkbox"/> 5000K		<input type="checkbox"/> DIM DALI
		<input type="checkbox"/> 6000K		<input type="checkbox"/> DIM Zigbee

0013 | Recessed light



DIMENSION (mm)



POWER SUPPLY
220-240V DC


LUMEN EFFICACY
80lm/W

CRI (Ra)
> 90


CUT OUT (mm)
Ø55

Light distribution


3W-10° 2700K

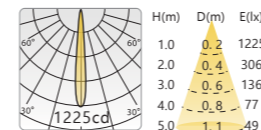

3W-24° 2700K

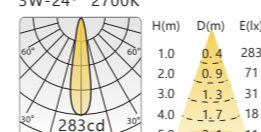

3W-36° 2700K

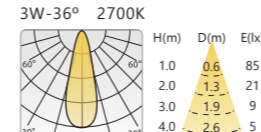


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 5W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 10°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 7W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 15°	<input type="checkbox"/> DIM Triac
	<input type="checkbox"/> 10W	<input type="checkbox"/> 4000K	<input type="checkbox"/> 24°	<input type="checkbox"/> DIM Bluetooth
		<input type="checkbox"/> 5000K	<input type="checkbox"/> 36°	<input type="checkbox"/> DIM DALI
		<input type="checkbox"/> 6000K	<input type="checkbox"/> 40°	<input type="checkbox"/> DIM Zigbee

8314 | Recessed light



DIMENSION (mm)



POWER SUPPLY
220-240V DC


LUMEN EFFICACY
80lm/W

CRI (Ra)
> 92


CUT OUT (mm)
Ø40

Light distribution


3W-10° 2700K

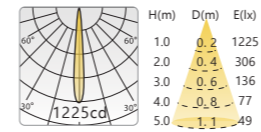

3W-24° 2700K

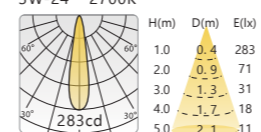


3W-36° 2700K

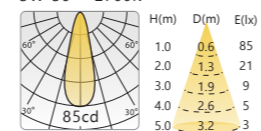


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 3W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 10°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 5W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 15°	<input type="checkbox"/> DIM Triac
	<input type="checkbox"/> 7W	<input type="checkbox"/> 4000K	<input type="checkbox"/> 24°	<input type="checkbox"/> DIM Bluetooth
		<input type="checkbox"/> 5000K	<input type="checkbox"/> 36°	<input type="checkbox"/> DIM DALI
		<input type="checkbox"/> 6000K	<input type="checkbox"/> 40°	<input type="checkbox"/> DIM Zigbee

P339 | Recessed light



DIMENSION (mm)

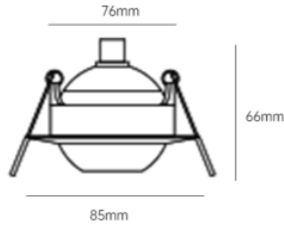

POWER SUPPLY
220-240V DC


LUMEN EFFICACY
70lm/W

CRI (Ra)
> 90


CUT OUT (mm)
Ø80

Light distribution


7W-15° 2700K

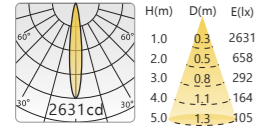

7W-24° 2700K

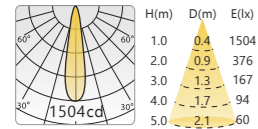

7W-38° 2700K

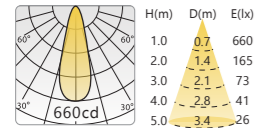


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 7W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 12°-54°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black		<input type="checkbox"/> 4000K		<input type="checkbox"/> DIM Triac
<input type="checkbox"/> Grey		<input type="checkbox"/> 6000K		<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

7507 | Recessed light



DIMENSION (mm)

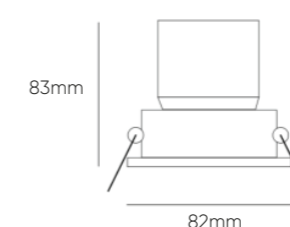

POWER SUPPLY
220-240V DC


LUMEN EFFICACY
75lm/W

CRI (Ra)
> 90


CUT OUT (mm)
Ø55

Light distribution

7W-15° 2700K

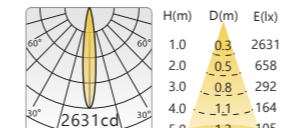


7W-24° 2700K

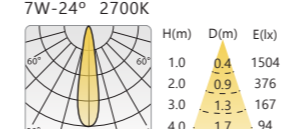


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 5W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 15°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 7W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 24°	<input type="checkbox"/> DIM Triac
	<input type="checkbox"/> 10W	<input type="checkbox"/> 4000K	<input type="checkbox"/> 36°	<input type="checkbox"/> DIM Bluetooth
		<input type="checkbox"/> 5000K	<input type="checkbox"/> 60°	<input type="checkbox"/> DIM DALI
		<input type="checkbox"/> 6000K		<input type="checkbox"/> DIM Zigbee

7500 | Recessed light



DIMENSION (mm)

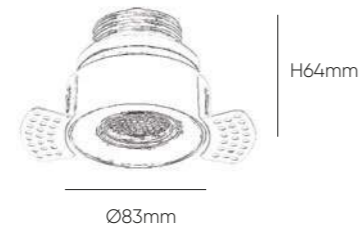

POWER SUPPLY
220-240V DC


LUMEN EFFICACY
86lm/W

CRI (Ra)
> 90


CUT OUT (mm)
Ø75

Light distribution


10W-15° 2700K

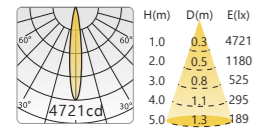

10W-24° 2700K

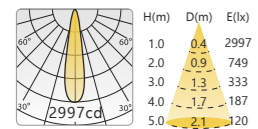

10W-38° 2700K

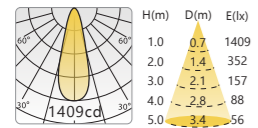


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 7W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 10°-40°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 10W	<input type="checkbox"/> 3000K		<input type="checkbox"/> DIM Triac
		<input type="checkbox"/> 4000K		<input type="checkbox"/> DIM Bluetooth
		<input type="checkbox"/> 5000K		<input type="checkbox"/> DIM DALI
		<input type="checkbox"/> 6000K		<input type="checkbox"/> DIM Zigbee

DPHY3W | Recessed light



DIMENSION (mm)

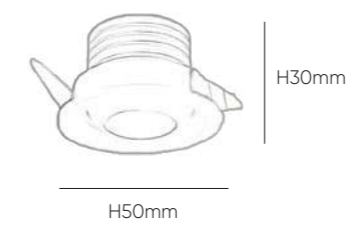

POWER SUPPLY
220-240V DC


LUMEN EFFICACY
80lm/W

CRI (Ra)
> 92


CUT OUT (mm)
Ø40

Light distribution


3W-15° 2700K

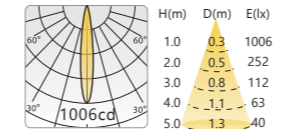

3W-24° 2700K

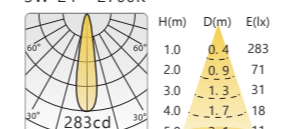


3W-36° 2700K

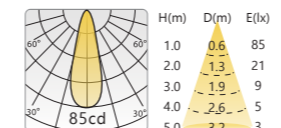


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 3W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 15°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black		<input type="checkbox"/> 3000K	<input type="checkbox"/> 24°	<input type="checkbox"/> DIM Triac
		<input type="checkbox"/> 4000K	<input type="checkbox"/> 36°	<input type="checkbox"/> DIM Bluetooth
		<input type="checkbox"/> 5000K		<input type="checkbox"/> DIM DALI
		<input type="checkbox"/> 6000K		<input type="checkbox"/> DIM Zigbee

T2 | Recessed light



DIMENSION (mm)

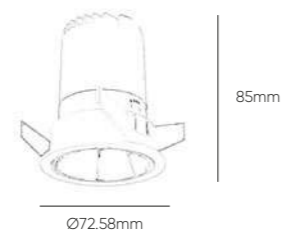

POWER SUPPLY
220-240V DC


LUMEN EFFICACY
70lm/W

CRI (Ra)
> 90


CUT OUT (mm)
Ø65 (10W)

Light distribution


10W-15° 2700K

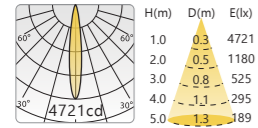

10W-24° 2700K

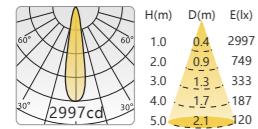

10W-36° 2700K

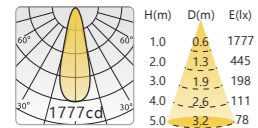

Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 3W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 15°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 5W	<input type="checkbox"/> 4000K	<input type="checkbox"/> 24°	<input type="checkbox"/> DIM Triac
	<input type="checkbox"/> 7W	<input type="checkbox"/> 6000K	<input type="checkbox"/> 36°	<input type="checkbox"/> DIM Bluetooth
	<input type="checkbox"/> 10W			<input type="checkbox"/> DIM DALI
	<input type="checkbox"/> 25W			<input type="checkbox"/> DIM Zigbee

FWY | Recessed light



DIMENSION (mm)



POWER SUPPLY
220-240V DC


LUMEN EFFICACY
100lm/W

CRI (Ra)
> 90

CUT OUT (mm)
Ø75 (10W)

Light distribution


5W-120° 2700K

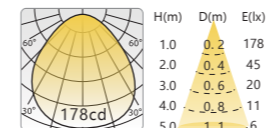

Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 5W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 120°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 7W	<input type="checkbox"/> 3000K		<input type="checkbox"/> DIM Triac
	<input type="checkbox"/> 10W	<input type="checkbox"/> 4000K		<input type="checkbox"/> DIM Bluetooth
	<input type="checkbox"/> 15W	<input type="checkbox"/> 5000K		<input type="checkbox"/> DIM DALI
	<input type="checkbox"/> 25W	<input type="checkbox"/> 6000K		<input type="checkbox"/> DIM Zigbee

LK | Recessed light



DIMENSION (mm)



POWER SUPPLY
220-240V DC


LUMEN EFFICACY
86lm/W

CRI (Ra)
> 90


CUT OUT (mm)
Ø75

Light distribution


10W-15° 2700K

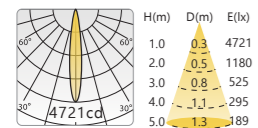

10W-24° 2700K

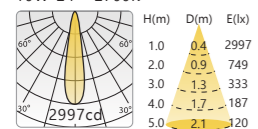

10W-38° 2700K

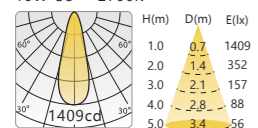


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 7W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 15°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 10W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 24°	<input type="checkbox"/> DIM Triac
		<input type="checkbox"/> 4000K	<input type="checkbox"/> 36°	<input type="checkbox"/> DIM Bluetooth
		<input type="checkbox"/> 5000K	<input type="checkbox"/> 55°	<input type="checkbox"/> DIM DALI
		<input type="checkbox"/> 6000K		<input type="checkbox"/> DIM Zigbee

FZ | Recessed light



DIMENSION (mm)



POWER SUPPLY
220-240V DC


LUMEN EFFICACY
105lm/W

CRI (Ra)
> 90


CUT OUT (mm)
Ø82 (10W)

Light distribution


5W-15° 2700K

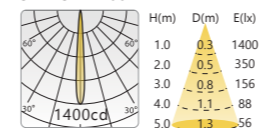

5W-24° 2700K

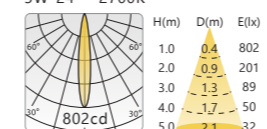


5W-36° 2700K

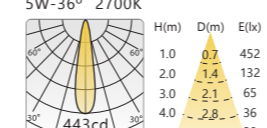

Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 5W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 15°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 7W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 24°	<input type="checkbox"/> DIM Triac
<input type="checkbox"/> Grey	<input type="checkbox"/> 10W	<input type="checkbox"/> 4000K	<input type="checkbox"/> 36°	<input type="checkbox"/> DIM Bluetooth
	<input type="checkbox"/> 25W	<input type="checkbox"/> 5000K		<input type="checkbox"/> DIM DALI
		<input type="checkbox"/> 6000K		<input type="checkbox"/> DIM Zigbee



DIMENSION (mm)









POWER SUPPLY
220-240V DC

LUMEN EFFICACY
93lm/W

CRI (Ra)
> 97

CUT OUT (mm)
Ø75 (10W)

Light distribution

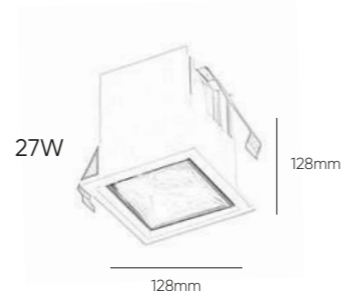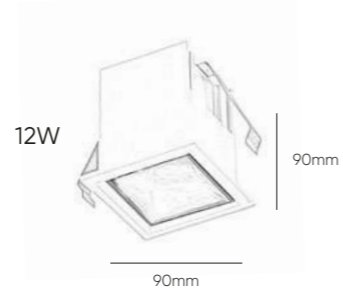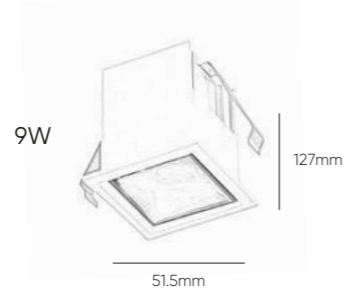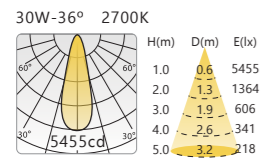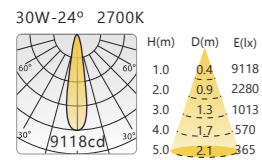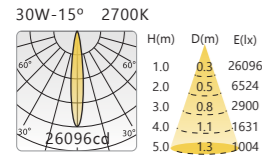


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 3W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 15°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 9W	<input type="checkbox"/> 4000K	<input type="checkbox"/> 24°	<input type="checkbox"/> DIM Triac
	<input type="checkbox"/> 12W	<input type="checkbox"/> 6000K	<input type="checkbox"/> 36°	<input type="checkbox"/> DIM Bluetooth
	<input type="checkbox"/> 15W			<input type="checkbox"/> DIM DALI
	<input type="checkbox"/> 27W			<input type="checkbox"/> DIM Zigbee
	<input type="checkbox"/> 30W			



DIMENSION (mm)






POWER SUPPLY
220-240V DC

LUMEN EFFICACY
80lm/W

CRI (Ra)
> 90

CUT OUT (mm)
Ø100


Light distribution

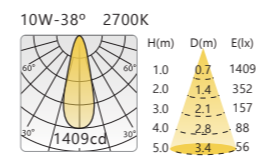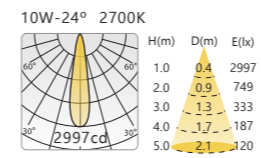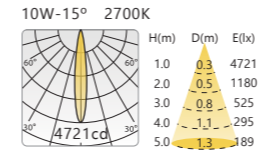


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 3W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 15°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 5W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 24°	<input type="checkbox"/> DIM Triac
	<input type="checkbox"/> 7W	<input type="checkbox"/> 4000K	<input type="checkbox"/> 36°	<input type="checkbox"/> DIM Bluetooth
	<input type="checkbox"/> 10W	<input type="checkbox"/> 5000K		<input type="checkbox"/> DIM DALI
	<input type="checkbox"/> 25W	<input type="checkbox"/> 6000K		<input type="checkbox"/> DIM Zigbee

SL74161 | Recessed light



DIMENSION (mm)



POWER SUPPLY
220-240V DC

LUMEN EFFICACY
78lm/W

CRI (Ra)
> 90

CUT OUT (mm)
Ø35

Information


Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 3W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 15°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black		<input type="checkbox"/> 3000K	<input type="checkbox"/> 24°	<input type="checkbox"/> DIM Triac
		<input type="checkbox"/> 4000K		<input type="checkbox"/> DIM Bluetooth
		<input type="checkbox"/> 5000K		<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee



FL76008 | Recessed light



DIMENSION (mm)



POWER SUPPLY
220-240V DC

LUMEN EFFICACY
62lm/W


CRI (Ra)
> 90

CUT OUT (mm)
Ø75 (10W)


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 7W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 15°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 12W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 24°	<input type="checkbox"/> DIM Triac
		<input type="checkbox"/> 4000K	<input type="checkbox"/> 35°	<input type="checkbox"/> DIM Bluetooth
		<input type="checkbox"/> 5000K		<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

SL74078 | Recessed light



DIMENSION (mm)

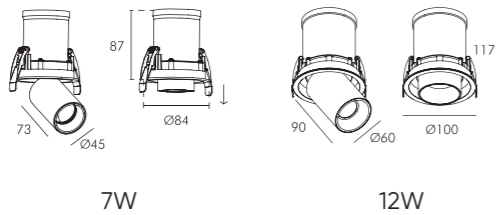

POWER SUPPLY
220-240V DC

LUMEN EFFICACY
67lm/W

CRI (Ra)
> 90

CUT OUT (mm)
Ø75(7W) / Ø92(12W)

Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 7W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 15°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 12W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 24°	<input type="checkbox"/> DIM Triac
		<input type="checkbox"/> 4000K	<input type="checkbox"/> 35°	<input type="checkbox"/> DIM Bluetooth
		<input type="checkbox"/> 5000K		<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee



FL76027 | Recessed light



DIMENSION (mm)



POWER SUPPLY
220-240V DC

LUMEN EFFICACY
55lm/W


CRI (Ra)
> 90

CUT OUT (mm)
Ø82 (10W)


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 5W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 15°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black		<input type="checkbox"/> 3000K	<input type="checkbox"/> 24°	<input type="checkbox"/> DIM Triac
<input type="checkbox"/> Grey		<input type="checkbox"/> 4000K	<input type="checkbox"/> 35°	<input type="checkbox"/> DIM Bluetooth
		<input type="checkbox"/> 5000K		<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

FL76001 | Recessed light



DIMENSION (mm)



POWER SUPPLY
220-240V DC

LUMEN EFFICACY
71lm/W

CRI (Ra)
> 90

CUT OUT (mm)
Ø75


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 7W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 15°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 12W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 24°	<input type="checkbox"/> DIM Triac
		<input type="checkbox"/> 6000K	<input type="checkbox"/> 35°	<input type="checkbox"/> DIM Bluetooth
		<input type="checkbox"/> 5000K		<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

FL76003 | Recessed light



DIMENSION (mm)



POWER SUPPLY
220-240V DC

LUMEN EFFICACY
70lm/W


CRI (Ra)
> 90

CUT OUT (mm)
Ø75


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 7W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 15°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 12W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 24°	<input type="checkbox"/> DIM Triac
		<input type="checkbox"/> 4000K	<input type="checkbox"/> 35°	<input type="checkbox"/> DIM Bluetooth
		<input type="checkbox"/> 5000K		<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

FL76002 | Recessed light



DIMENSION (mm)



POWER SUPPLY
220-240V DC

LUMEN EFFICACY
52lm/W

CRI (Ra)
> 90

CUT OUT (mm)
Ø75


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 7W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 15°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 12W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 24°	<input type="checkbox"/> DIM Triac
		<input type="checkbox"/> 4000K	<input type="checkbox"/> 35°	<input type="checkbox"/> DIM Bluetooth
		<input type="checkbox"/> 5000K		<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

FL76004 | Recessed light



DIMENSION (mm)



POWER SUPPLY
220-240V DC

LUMEN EFFICACY
62lm/W


CRI (Ra)
> 90

CUT OUT (mm)
Ø75


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 7W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 15°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 12W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 24°	<input type="checkbox"/> DIM Triac
<input type="checkbox"/> Grey		<input type="checkbox"/> 4000K	<input type="checkbox"/> 35°	<input type="checkbox"/> DIM Bluetooth
		<input type="checkbox"/> 5000K		<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

FL76035 | Recessed light



DIMENSION (mm)



POWER SUPPLY
220-240V DC

LUMEN EFFICACY
45lm/W

CRI (Ra)
 > 90

CUT OUT (mm)
 Ø100


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 18W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 15°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black		<input type="checkbox"/> 3000K	<input type="checkbox"/> 24°	<input type="checkbox"/> DIM Triac
		<input type="checkbox"/> 6000K	<input type="checkbox"/> 35°	<input type="checkbox"/> DIM Bluetooth
		<input type="checkbox"/> 5000K		<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

DL73027 | Recessed light



DIMENSION (mm)

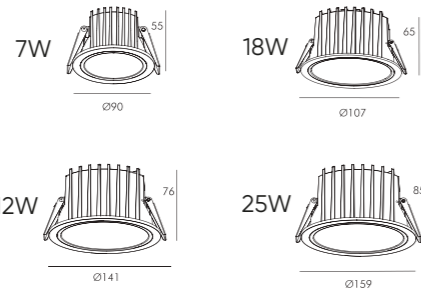

POWER SUPPLY
220-240V DC

LUMEN EFFICACY
62lm/W

CRI (Ra)
 > 90

CUT OUT (mm)
 Ø75

Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 7W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 50°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 12W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 60°	<input type="checkbox"/> DIM Triac
	<input type="checkbox"/> 18W	<input type="checkbox"/> 4000K	<input type="checkbox"/> 65°	<input type="checkbox"/> DIM Bluetooth
	<input type="checkbox"/> 25W	<input type="checkbox"/> 5000K		<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee


CEILING MOUNTED LIGHT

- | | |
|-------|-----|
| JG | 041 |
| 7505 | 041 |
| 1T | 042 |
| 2T | 042 |
| 12524 | 043 |
| ADJ | 043 |
| 8001 | 044 |
| P308 | 044 |
| 12524 | 045 |





JG | Ceiling mounted light



DIMENSION (mm)






POWER SUPPLY
220-240V DC

LUMEN EFFICACY
80lm/W

CRI (Ra)
> 90

Light distribution

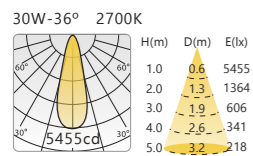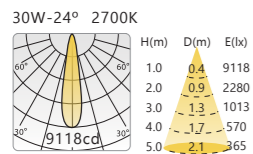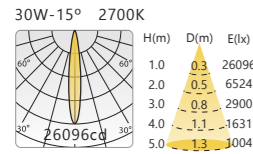

Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 6-30W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 15°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black		<input type="checkbox"/> 4000K	<input type="checkbox"/> 24°	<input type="checkbox"/> DIM Triac
		<input type="checkbox"/> 6000K	<input type="checkbox"/> 36°	<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

1T | Ceiling mounted light



DIMENSION (mm)






POWER SUPPLY
220-240V DC

LUMEN EFFICACY
80lm/W

CRI (Ra)
> 90


Light distribution

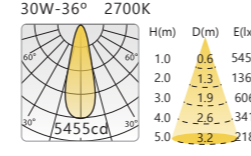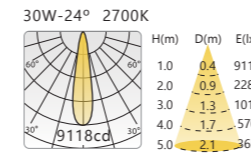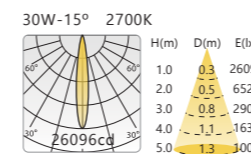


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 6-30W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 15°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black		<input type="checkbox"/> 4000K	<input type="checkbox"/> 24°	<input type="checkbox"/> DIM Triac
		<input type="checkbox"/> 6000K	<input type="checkbox"/> 36°	<input type="checkbox"/> DIM Bluetooth
			<input type="checkbox"/> 60°	<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

7505 | Ceiling mounted light



DIMENSION (mm)






POWER SUPPLY
220-240V DC

LUMEN EFFICACY
80lm/W

CRI (Ra)
> 90

Light distribution

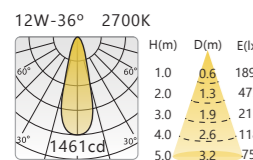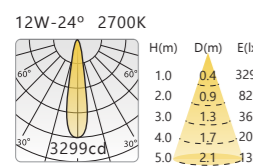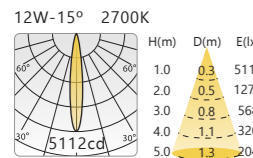

Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 5W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 15°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 7W	<input type="checkbox"/> 4000K	<input type="checkbox"/> 24°	<input type="checkbox"/> DIM Triac
	<input type="checkbox"/> 9W	<input type="checkbox"/> 6000K	<input type="checkbox"/> 36°	<input type="checkbox"/> DIM Bluetooth
	<input type="checkbox"/> 12W			<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

2T | Ceiling mounted light



DIMENSION (mm)






POWER SUPPLY
220-240V DC

LUMEN EFFICACY
90lm/W

CRI (Ra)
> 90


Light distribution

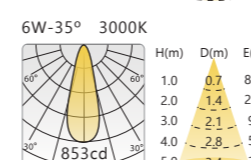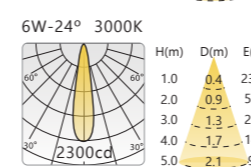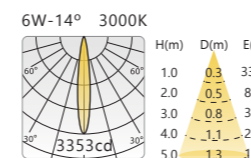


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 2*10W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 15°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black		<input type="checkbox"/> 4000K	<input type="checkbox"/> 24°	<input type="checkbox"/> DIM Triac
		<input type="checkbox"/> 6000K	<input type="checkbox"/> 36°	<input type="checkbox"/> DIM Bluetooth
			<input type="checkbox"/> 60°	<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

12524 | Ceiling mounted light



DIMENSION (mm)

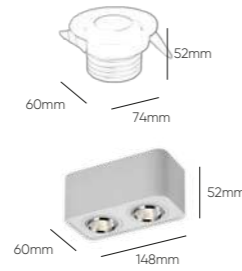


POWER SUPPLY
220-240V DC

LUMEN EFFICACY
75lm/W


CRI (Ra)
> 90

Light distribution


7W-15° 3000K

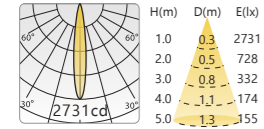

7W-24° 3000K

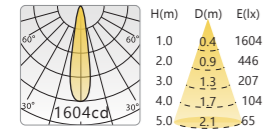

7W-36° 3000K

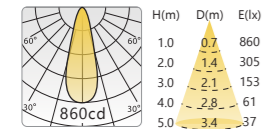

Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 7W	<input type="checkbox"/> 300K	<input type="checkbox"/> 15°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 14W	<input type="checkbox"/> 4000K	<input type="checkbox"/> 24°	<input type="checkbox"/> DIM Triac
		<input type="checkbox"/> 6000K	<input type="checkbox"/> 36°	<input type="checkbox"/> DIM Bluetooth
			<input type="checkbox"/> 55°	<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

8001 | Ceiling mounted light



DIMENSION (mm)




POWER SUPPLY
220-240V DC

LUMEN EFFICACY
65lm/W


CRI (Ra)
> 90

Light distribution


5W-8° 3000K

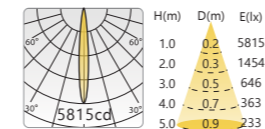

5W-15° 3000K

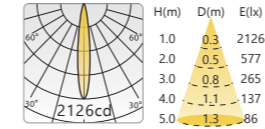


5W-30° 3000K

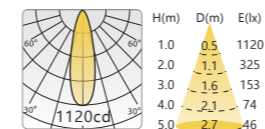

Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 5W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 8°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black		<input type="checkbox"/> 4000K	<input type="checkbox"/> 15°	<input type="checkbox"/> DIM Triac
		<input type="checkbox"/> 6000K	<input type="checkbox"/> 20°	<input type="checkbox"/> DIM Bluetooth
			<input type="checkbox"/> 30°	<input type="checkbox"/> DIM DALI
			<input type="checkbox"/> 40°	<input type="checkbox"/> DIM Zigbee

ADJ | Ceiling mounted light



DIMENSION (mm)




POWER SUPPLY
220-240V DC

LUMEN EFFICACY
80lm/W


CRI (Ra)
> 90

Light distribution


10W-15° 2700K

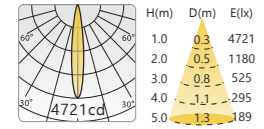

10W-24° 2700K

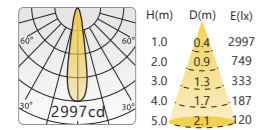

10W-36° 2700K

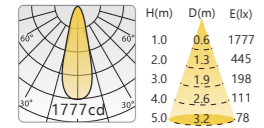

Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 3W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 15°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 7W	<input type="checkbox"/> 4000K	<input type="checkbox"/> 24°	<input type="checkbox"/> DIM Triac
	<input type="checkbox"/> 10W	<input type="checkbox"/> 6000K	<input type="checkbox"/> 36°	<input type="checkbox"/> DIM Bluetooth
			<input type="checkbox"/> 60°	<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

P308 | Ceiling mounted light



DIMENSION (mm)




POWER SUPPLY
220-240V DC

LUMEN EFFICACY
59lm/W


CRI (Ra)
> 90

Light distribution


6W-14° 3000K

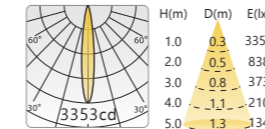

6W-24° 3000K

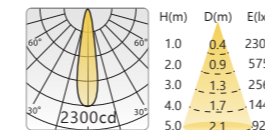

6W-35° 3000K

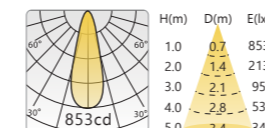


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 6W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 14°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 5W	<input type="checkbox"/> 4000K	<input type="checkbox"/> 25°	<input type="checkbox"/> DIM Triac
	<input type="checkbox"/> 7W	<input type="checkbox"/> 6000K	<input type="checkbox"/> 35°	<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee



DIMENSION (mm)



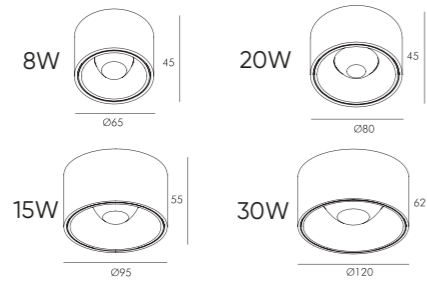


POWER SUPPLY
220-240V DC

LUMEN EFFICACY
76lm/W


CRI (Ra)
> 90

Light distribution

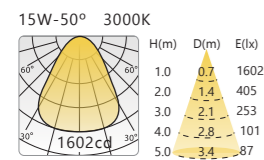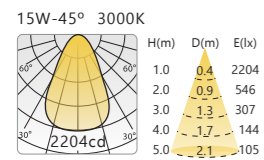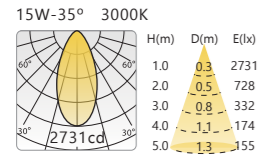

Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 8W	<input type="checkbox"/> 300K	<input type="checkbox"/> 35°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 15W	<input type="checkbox"/> 4000K	<input type="checkbox"/> 45°	<input type="checkbox"/> DIM Triac
	<input type="checkbox"/> 20W	<input type="checkbox"/> 6000K	<input type="checkbox"/> 50°	<input type="checkbox"/> DIM Bluetooth
	<input type="checkbox"/> 30W			<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

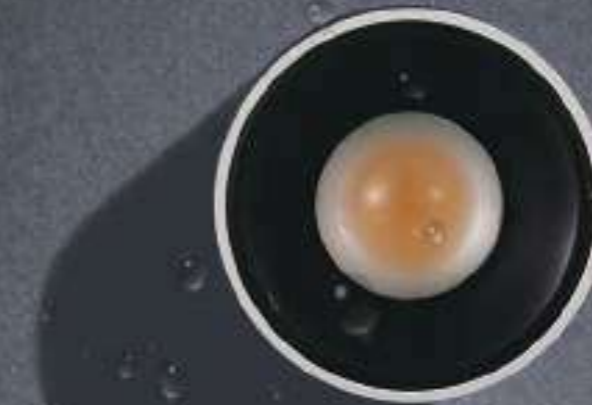


TRACK LIGHT

TL2022	051
TL2024	051
TL2027	052
MINI	052
7406	053
8907	053
0045	054
1828	054
0218	055
480	055
0019	056
0037	056
0512-C	057
LS	057
LJ	058






TL2022 | Track light



DIMENSION (mm)

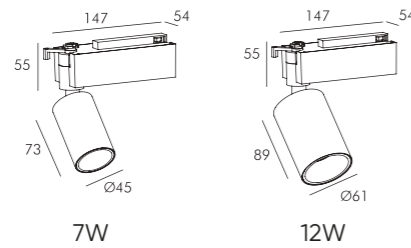


POWER SUPPLY
220-240V DC

LUMEN EFFICACY
70lm/W

CRI (Ra)
> 95

Light distribution

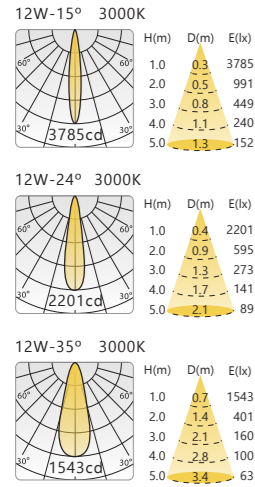


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 7W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 15°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 12W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 24°	<input type="checkbox"/> DIM Triac
		<input type="checkbox"/> 4000K	<input type="checkbox"/> 35°	<input type="checkbox"/> DIM Bluetooth
		<input type="checkbox"/> 5000K		<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

TL2027 | Track light



DIMENSION (mm)

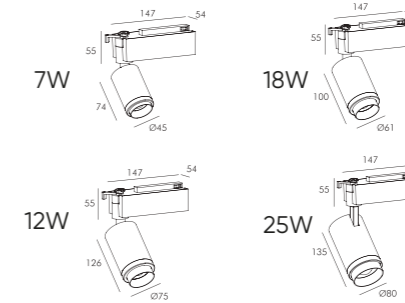


POWER SUPPLY
220-240V DC

LUMEN EFFICACY
80lm/W

CRI (Ra)
> 90


Light distribution

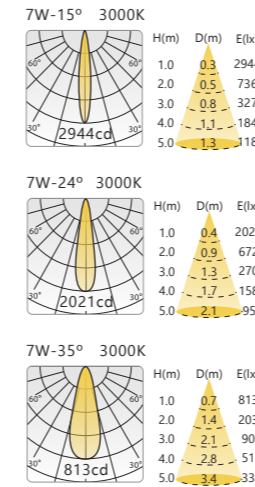


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 7W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 15-60°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 12W	<input type="checkbox"/> 3000K		<input type="checkbox"/> DIM Triac
<input type="checkbox"/> Silver	<input type="checkbox"/> 18W	<input type="checkbox"/> 4000K		<input type="checkbox"/> DIM Bluetooth
	<input type="checkbox"/> 25W			<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

TL2024 | Track light



DIMENSION (mm)

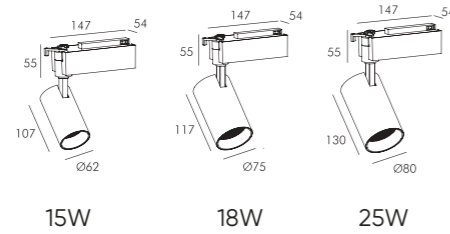


POWER SUPPLY
220-240V DC

LUMEN EFFICACY
76lm/W

CRI (Ra)
> 95

Light distribution

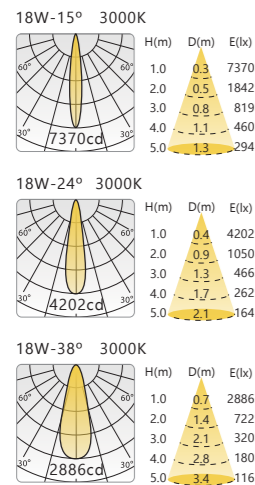

Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 15W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 15°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 18W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 24°	<input type="checkbox"/> DIM Triac
	<input type="checkbox"/> 25W	<input type="checkbox"/> 4000K	<input type="checkbox"/> 35°	<input type="checkbox"/> DIM Bluetooth
		<input type="checkbox"/> 5000K		<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

MINI | Track light



DIMENSION (mm)




POWER SUPPLY
220-240V DC

LUMEN EFFICACY
95lm/W

CRI (Ra)
> 90


Light distribution

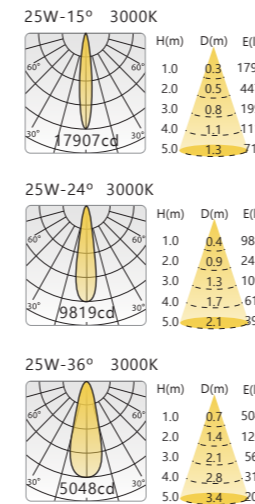

Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 3-25W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 15°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black		<input type="checkbox"/> 4000K	<input type="checkbox"/> 24°	<input type="checkbox"/> DIM Triac
		<input type="checkbox"/> 6000K	<input type="checkbox"/> 36°	<input type="checkbox"/> DIM Bluetooth
			<input type="checkbox"/> 50°	<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

7406 | Track light



DIMENSION (mm)






POWER SUPPLY
220-240V DC

LUMEN EFFICACY
60lm/W

CRI (Ra)
> 95


Light distribution

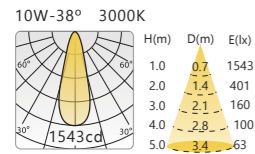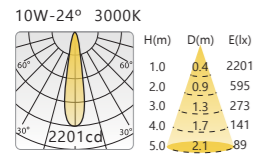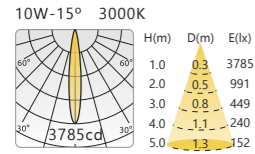

Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 10W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 6-50°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black		<input type="checkbox"/> 4000K		<input type="checkbox"/> DIM Triac
		<input type="checkbox"/> 6000K		<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

8907 | Track light



DIMENSION (mm)






POWER SUPPLY
220-240V DC

LUMEN EFFICACY
60lm/W

CRI (Ra)
> 95

Light distribution

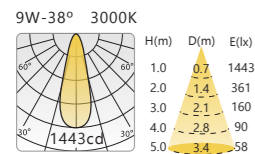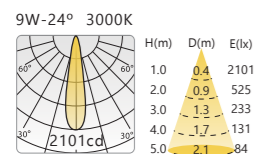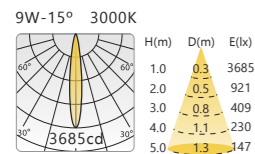

Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 9W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 9-40°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black		<input type="checkbox"/> 4000K		<input type="checkbox"/> DIM Triac
		<input type="checkbox"/> 6000K		<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

0045 | Track light



DIMENSION (mm)






POWER SUPPLY
220-240V DC

LUMEN EFFICACY
60lm/W

CRI (Ra)
> 90

Light distribution

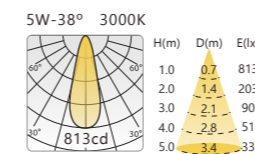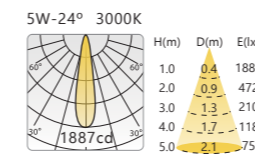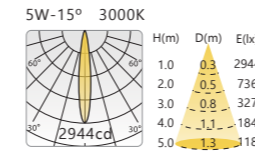


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 5W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 10°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black		<input type="checkbox"/> 4000K	<input type="checkbox"/> 20°	<input type="checkbox"/> DIM Triac
		<input type="checkbox"/> 6000K	<input type="checkbox"/> 30°	<input type="checkbox"/> DIM Bluetooth
			<input type="checkbox"/> 40°	<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

1828 | Track light



DIMENSION (mm)



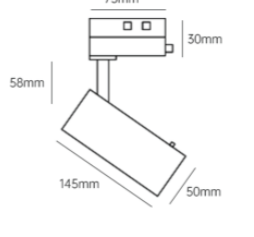


POWER SUPPLY
220-240V DC

LUMEN EFFICACY
60lm/W

CRI (Ra)
> 95


Light distribution

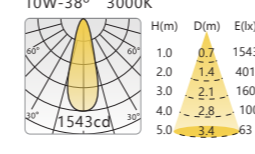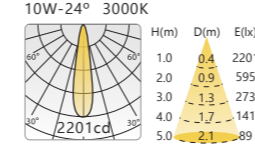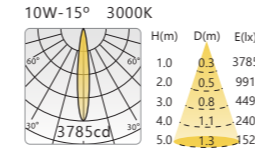

Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 10W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 15°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black		<input type="checkbox"/> 4000K	<input type="checkbox"/> 24°	<input type="checkbox"/> DIM Triac
		<input type="checkbox"/> 6000K	<input type="checkbox"/> 36°	<input type="checkbox"/> DIM Bluetooth
			<input type="checkbox"/> 60°	<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

0218 | Track light



DIMENSION (mm)





POWER SUPPLY
220-240V DC

LUMEN EFFICACY
60lm/W

CRI (Ra)
> 95

Light distribution



Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 18W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 24-42° (Shapeable)	<input type="checkbox"/> On-off
<input type="checkbox"/> Black		<input type="checkbox"/> 4000K		<input type="checkbox"/> DIM Triac
		<input type="checkbox"/> 6000K		<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

0019 | Track light



DIMENSION (mm)






POWER SUPPLY
220-240V DC

LUMEN EFFICACY
60lm/W

CRI (Ra)
> 90


Light distribution



Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 9W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 6°-40°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black		<input type="checkbox"/> 4000K		<input type="checkbox"/> DIM Triac
		<input type="checkbox"/> 6000K		<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

480 | Track light



DIMENSION (mm)





POWER SUPPLY
220-240V DC

LUMEN EFFICACY
60lm/W

CRI (Ra)
> 95

Light distribution



Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 15W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 15-48°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black		<input type="checkbox"/> 4000K		<input type="checkbox"/> DIM Triac
		<input type="checkbox"/> 6000K		<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

0037 | Track light



DIMENSION (mm)






POWER SUPPLY
220-240V DC

LUMEN EFFICACY
60lm/W

CRI (Ra)
> 95



Light distribution




Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 7W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 15°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black		<input type="checkbox"/> 4000K		<input type="checkbox"/> DIM Triac
		<input type="checkbox"/> 6000K		<input type="checkbox"/> DIM Bluetooth
			<input type="checkbox"/> 24°	<input type="checkbox"/> DIM DALI
			<input type="checkbox"/> 36°	<input type="checkbox"/> DIM Zigbee
			<input type="checkbox"/> 60°	

0512-C | Track light



DIMENSION (mm)

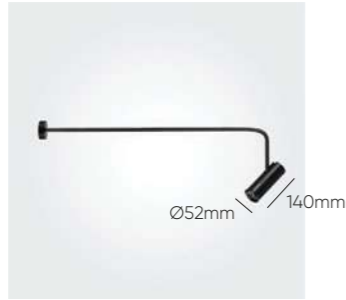


POWER SUPPLY
220-240V DC

LUMEN EFFICACY
66lm/W


CRI (Ra)
> 95

Light distribution


12W-15° 3000K

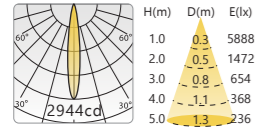

12W-24° 3000K

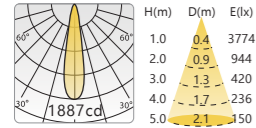

12W-38° 3000K

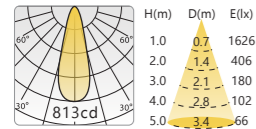

Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> Black	<input type="checkbox"/> 12W	<input type="checkbox"/> 3000K <input type="checkbox"/> 4000K <input type="checkbox"/> 6000K	<input type="checkbox"/> 10-50°	<input type="checkbox"/> On-off <input type="checkbox"/> DIM Triac <input type="checkbox"/> DIM Bluetooth <input type="checkbox"/> DIM DALI <input type="checkbox"/> DIM Zigbee

LJ | Track light



DIMENSION (mm)




POWER SUPPLY
220-240V DC

LUMEN EFFICACY
95lm/W


CRI (Ra)
> 90

Light distribution


25W-15° 3000K

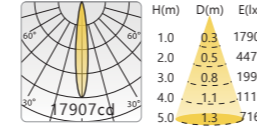

25W-24° 3000K

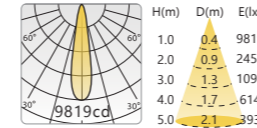


25W-36° 3000K

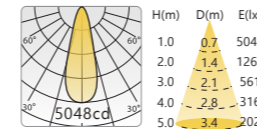

Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White <input type="checkbox"/> Black	<input type="checkbox"/> 3-25W	<input type="checkbox"/> 3000K <input type="checkbox"/> 4000K <input type="checkbox"/> 6000K	<input type="checkbox"/> 15°-60°	<input type="checkbox"/> On-off <input type="checkbox"/> DIM Triac <input type="checkbox"/> DIM Bluetooth <input type="checkbox"/> DIM DALI <input type="checkbox"/> DIM Zigbee

LS | Track light



DIMENSION (mm)




POWER SUPPLY
220-240V DC

LUMEN EFFICACY
95lm/W


CRI (Ra)
> 90

Light distribution


25W-15° 3000K

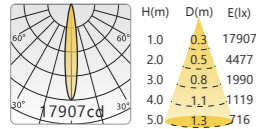

25W-24° 3000K

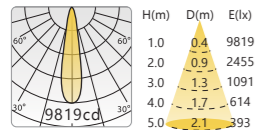

25W-36° 3000K

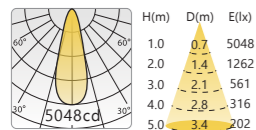


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White <input type="checkbox"/> Black	<input type="checkbox"/> 15W	<input type="checkbox"/> 3000K <input type="checkbox"/> 4000K <input type="checkbox"/> 6000K	<input type="checkbox"/> 15° <input type="checkbox"/> 24° <input type="checkbox"/> 36° <input type="checkbox"/> 55°	<input type="checkbox"/> On-off <input type="checkbox"/> DIM Triac <input type="checkbox"/> DIM Bluetooth <input type="checkbox"/> DIM DALI <input type="checkbox"/> DIM Zigbee



MAGNETIC TRACK LIGHT

SRC-D	063
SRC-E	063
SSM-D	064
SSP-D	064
LMLL3015	065
SMGL1505	065
SMGL3010	066
SMLS0612	066
SMLS1212	067
SMGS0606	067
SMGS1212	068
SMLS0606	068
SMS4208	069
SMS4005	069
SMS4010	070
SMLL12030	070
SMS4005F	071
SMS4010F	071
SMS5415	072
SMS5515	072
SMS7615	073
SMP13006	073
SMP4008	074
SMP4008F	074
MSSM-M	075
MSMW2515	075
MSMLS0606	076
MSMLL3006	076
RMS0202	077
RMS6007	077
RSMS0506	078
RSML18006	078

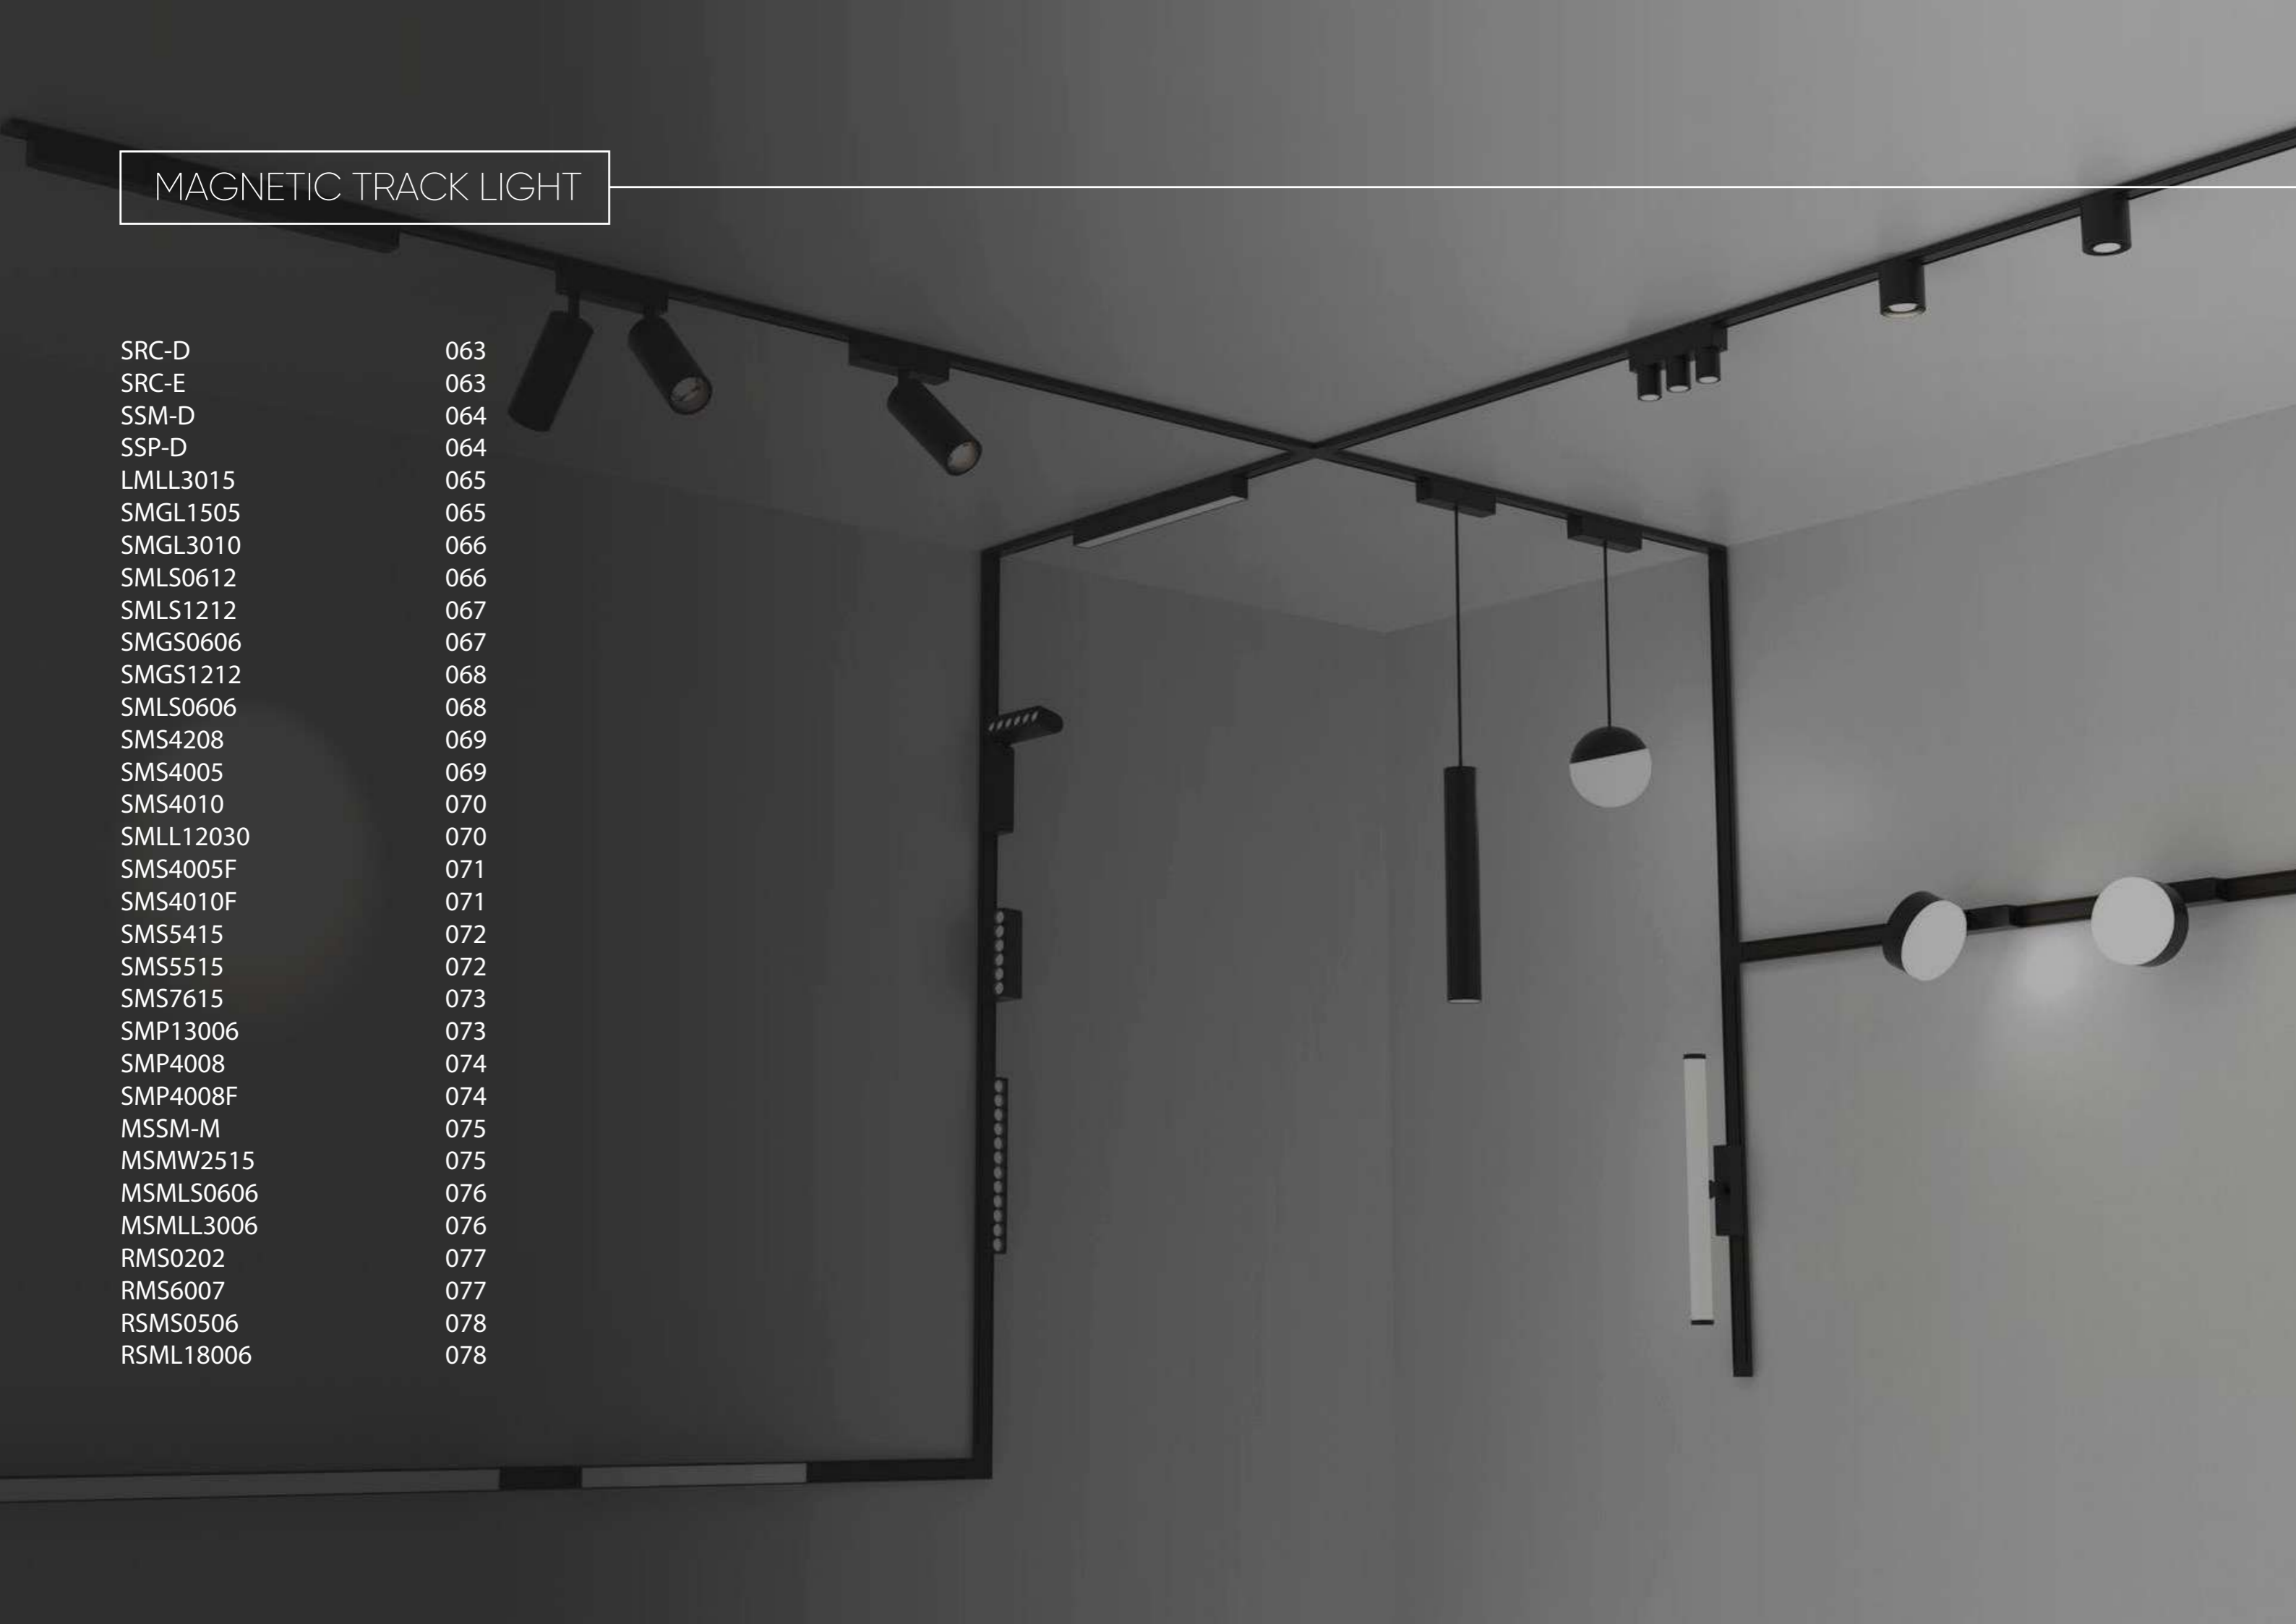



SRC-D | Magnetic track light

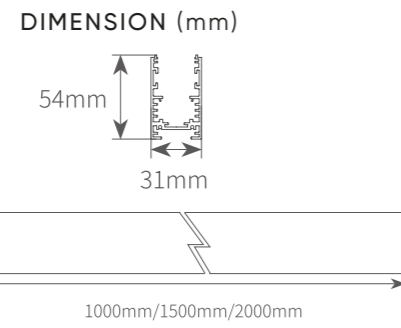

POWER SUPPLY
220-240V DC


LUMEN EFFICACY
70lm/W

CUT OUT (mm)
W35*H60



Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 768W	<input type="checkbox"/> 3000K		
<input type="checkbox"/> Black				

Accessory

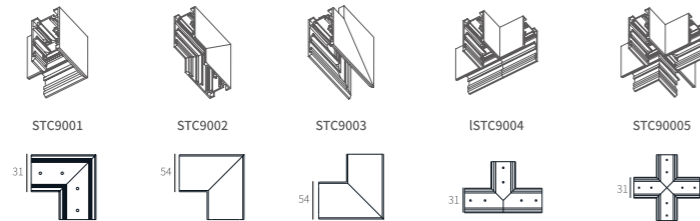

SRC-E | Magnetic track light

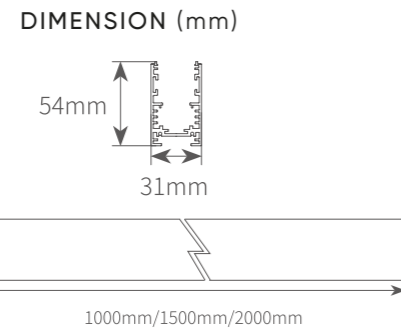

POWER SUPPLY
220-240V DC


LUMEN EFFICACY
70lm/W

CUT OUT (mm)
W35*H60



Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 768W	<input type="checkbox"/> 3000K		
<input type="checkbox"/> Black				

Accessory

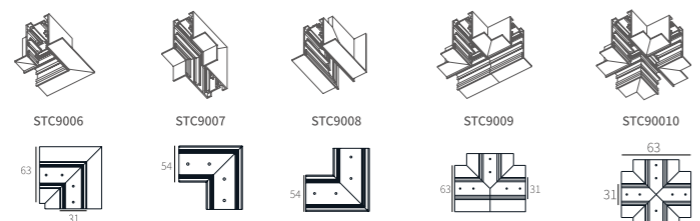

SSM-D | Magnetic track light

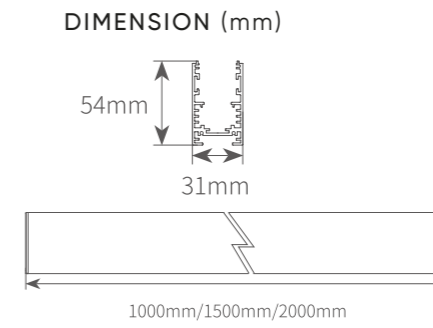

POWER SUPPLY
220-240V DC


LUMEN EFFICACY
70lm/W

CUT OUT (mm)
W35*H60



Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 768W	<input type="checkbox"/> 3000K		
<input type="checkbox"/> Black				

Accessory

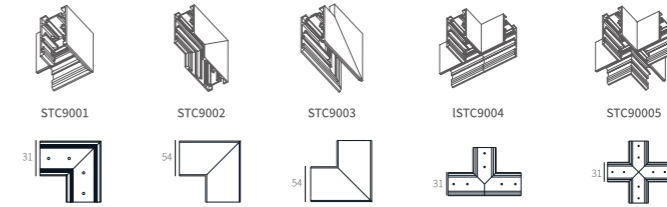

SSP-D | Magnetic track light

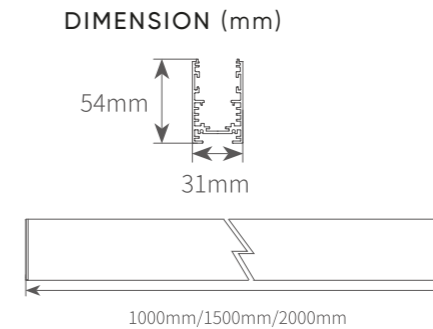

POWER SUPPLY
220-240V DC


LUMEN EFFICACY
70lm/W

CUT OUT (mm)
W35*H60



Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 768W	<input type="checkbox"/> 3000K		
<input type="checkbox"/> Black				

Accessory

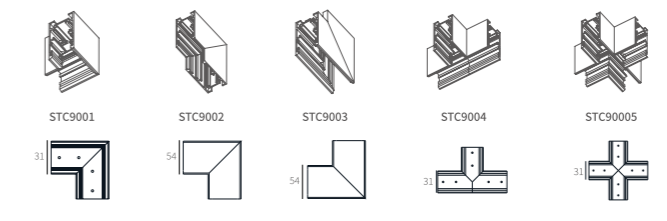

LMLL3015 | Magnetic track light

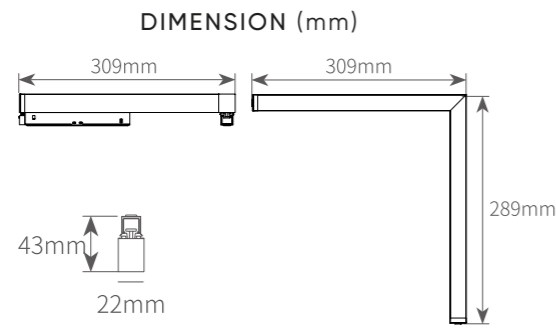



POWER SUPPLY
220-240V DC

LUMEN EFFICACY
80lm/W

CRI (Ra)
 > 97



Light distribution

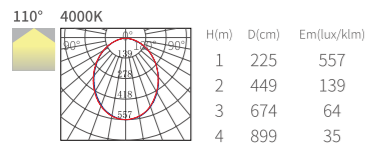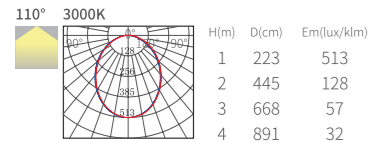

Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 22W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 110°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black		<input type="checkbox"/> 3000K		<input type="checkbox"/> DIM Triac
		<input type="checkbox"/> 4000K		<input type="checkbox"/> DIM Bluetooth
		<input type="checkbox"/> 5000K		<input type="checkbox"/> DIM DALI
		<input type="checkbox"/> 6000K		<input type="checkbox"/> DIM Zigbee
		<input type="checkbox"/> 6500K		

SMGL3010 | Magnetic track light

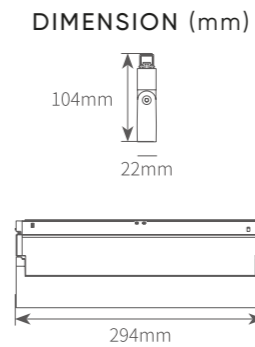



POWER SUPPLY
220-240V DC

LUMEN EFFICACY
80lm/W

CRI (Ra)
 > 97



Light distribution

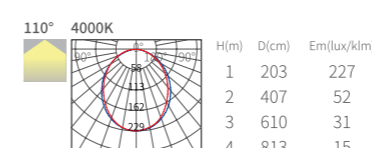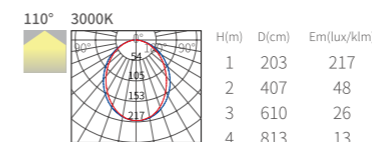

Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 7W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 110°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 10W	<input type="checkbox"/> 3000K		<input type="checkbox"/> DIM Triac
		<input type="checkbox"/> 4000K		<input type="checkbox"/> DIM Bluetooth
		<input type="checkbox"/> 5000K		<input type="checkbox"/> DIM DALI
		<input type="checkbox"/> 6000K		<input type="checkbox"/> DIM Zigbee
		<input type="checkbox"/> 6500K		

SMGL1505 | Magnetic track light

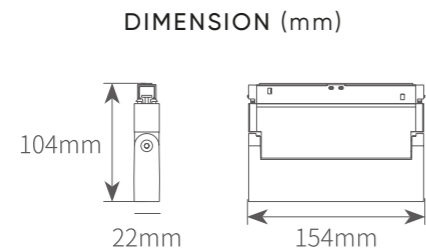



POWER SUPPLY
220-240V DC

LUMEN EFFICACY
80m/W

CRI (Ra)
 > 97



Light distribution

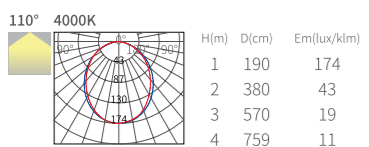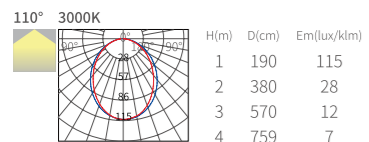

Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 30W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 110°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black		<input type="checkbox"/> 3000K		<input type="checkbox"/> DIM Triac
		<input type="checkbox"/> 4000K		<input type="checkbox"/> DIM Bluetooth
		<input type="checkbox"/> 5000K		<input type="checkbox"/> DIM DALI
		<input type="checkbox"/> 6000K		<input type="checkbox"/> DIM Zigbee
		<input type="checkbox"/> 6500K		

SMGL0612 | Magnetic track light


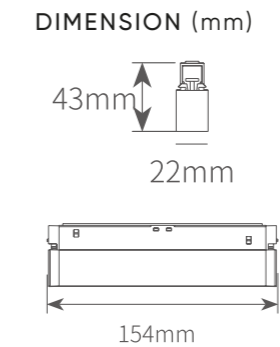



POWER SUPPLY
220-240V DC

LUMEN EFFICACY
80m/W

CRI (Ra)
 > 97


Light distribution

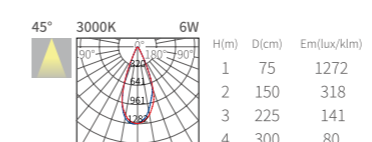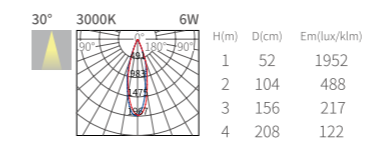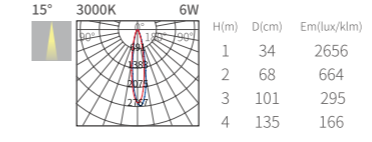


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 6W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 15°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 12W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 30°	<input type="checkbox"/> DIM Triac
		<input type="checkbox"/> 4000K	<input type="checkbox"/> 45°	<input type="checkbox"/> DIM Bluetooth
		<input type="checkbox"/> 5000K		<input type="checkbox"/> DIM DALI
		<input type="checkbox"/> 6000K		<input type="checkbox"/> DIM Zigbee
		<input type="checkbox"/> 6500K		

SMLS1212 | Magnetic track light



DIMENSION (mm)

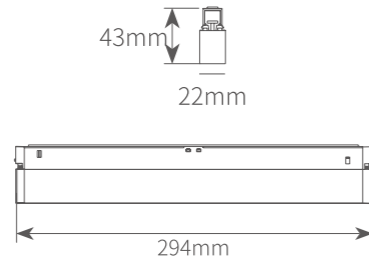


POWER SUPPLY
220-240V DC

LUMEN EFFICACY
80lm/W

CRI (Ra)
> 97


Light distribution

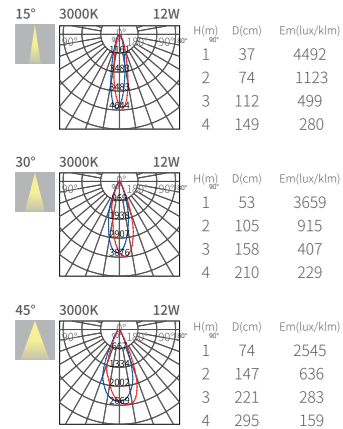


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 12W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 15°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 20W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 30°	<input type="checkbox"/> DIM Triac
		<input type="checkbox"/> 4000K	<input type="checkbox"/> 45°	<input type="checkbox"/> DIM Bluetooth
		<input type="checkbox"/> 5000K		<input type="checkbox"/> DIM DALI
		<input type="checkbox"/> 6000K		<input type="checkbox"/> DIM Zigbee
		<input type="checkbox"/> 6500K		

SMGS1212 | Magnetic track light



DIMENSION (mm)

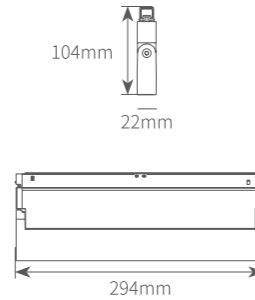


POWER SUPPLY
220-240V DC

LUMEN EFFICACY
80lm/W

CRI (Ra)
> 97


Light distribution

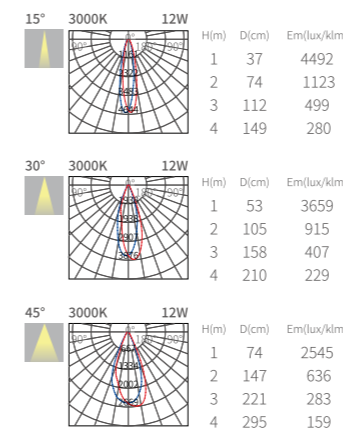


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 12W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 15°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 24W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 30°	<input type="checkbox"/> DIM Triac
		<input type="checkbox"/> 4000K	<input type="checkbox"/> 45°	<input type="checkbox"/> DIM Bluetooth
		<input type="checkbox"/> 5000K		<input type="checkbox"/> DIM DALI
		<input type="checkbox"/> 6000K		<input type="checkbox"/> DIM Zigbee
		<input type="checkbox"/> 6500K		

SMGS0606 | Magnetic track light



DIMENSION (mm)

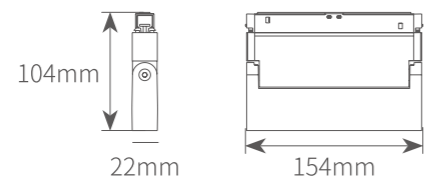


POWER SUPPLY
220-240V DC

LUMEN EFFICACY
80m/W

CRI (Ra)
> 97



Light distribution

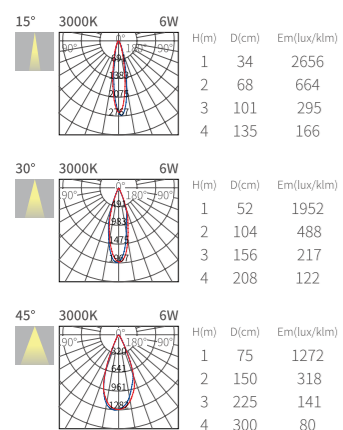


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 6W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 15°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 12W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 30°	<input type="checkbox"/> DIM Triac
		<input type="checkbox"/> 4000K	<input type="checkbox"/> 45°	<input type="checkbox"/> DIM Bluetooth
		<input type="checkbox"/> 5000K		<input type="checkbox"/> DIM DALI
		<input type="checkbox"/> 6000K		<input type="checkbox"/> DIM Zigbee
		<input type="checkbox"/> 6500K		

SMLT3006 | Magnetic track light



DIMENSION (mm)

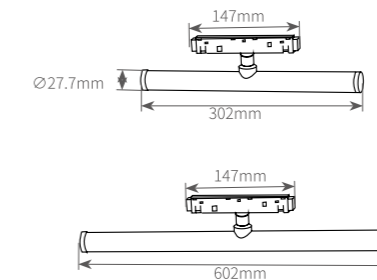


POWER SUPPLY
220-240V DC

LUMEN EFFICACY
80m/W

CRI (Ra)
> 97


Light distribution

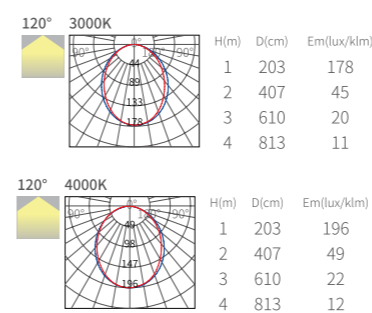


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 6W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 120°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 12W	<input type="checkbox"/> 3000K		<input type="checkbox"/> DIM Triac
		<input type="checkbox"/> 4000K		<input type="checkbox"/> DIM Bluetooth
		<input type="checkbox"/> 5000K		<input type="checkbox"/> DIM DALI
		<input type="checkbox"/> 6000K		<input type="checkbox"/> DIM Zigbee
		<input type="checkbox"/> 6500K		

SMS4208 | Magnetic track light



DIMENSION (mm)

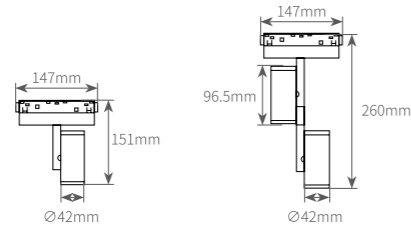


POWER SUPPLY
220-240V DC

LUMEN EFFICACY
80lm/W

CRI (Ra)
> 90


Light distribution

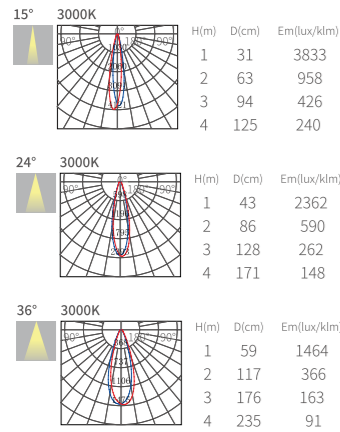


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 8W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 15°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 16W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 24°	<input type="checkbox"/> DIM Triac
		<input type="checkbox"/> 4000K	<input type="checkbox"/> 36°	<input type="checkbox"/> DIM Bluetooth
		<input type="checkbox"/> 5000K		<input type="checkbox"/> DIM DALI
		<input type="checkbox"/> 6000K		<input type="checkbox"/> DIM Zigbee
		<input type="checkbox"/> 6500K		

SMS4010 | Magnetic track light



DIMENSION (mm)

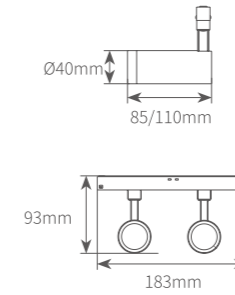


POWER SUPPLY
220-240V DC

LUMEN EFFICACY
80lm/W

CRI (Ra)
> 97



Light distribution

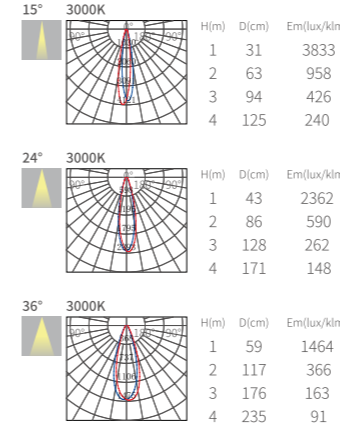


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 10W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 15°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 16W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 24°	<input type="checkbox"/> DIM Triac
		<input type="checkbox"/> 4000K	<input type="checkbox"/> 36°	<input type="checkbox"/> DIM Bluetooth
		<input type="checkbox"/> 5000K		<input type="checkbox"/> DIM DALI
		<input type="checkbox"/> 6000K		<input type="checkbox"/> DIM Zigbee
		<input type="checkbox"/> 6500K		

SMS4005 | Magnetic track light



DIMENSION (mm)

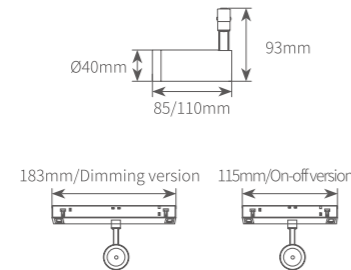


POWER SUPPLY
220-240V DC

LUMEN EFFICACY
80m/W

CRI (Ra)
> 97


Light distribution

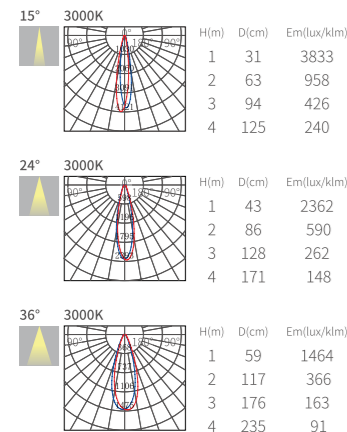


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 5W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 15°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 8W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 24°	<input type="checkbox"/> DIM Triac
		<input type="checkbox"/> 4000K	<input type="checkbox"/> 36°	<input type="checkbox"/> DIM Bluetooth
		<input type="checkbox"/> 5000K		<input type="checkbox"/> DIM DALI
		<input type="checkbox"/> 6000K		<input type="checkbox"/> DIM Zigbee
		<input type="checkbox"/> 6500K		

SMLL12030 | Magnetic track light



DIMENSION (mm)

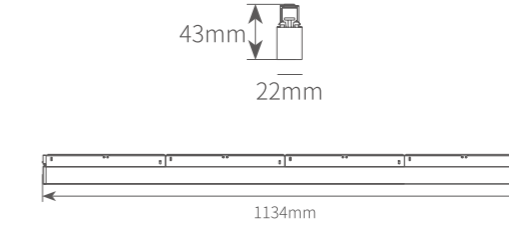


POWER SUPPLY
220-240V DC

LUMEN EFFICACY
80m/W

CRI (Ra)
> 97


Light distribution

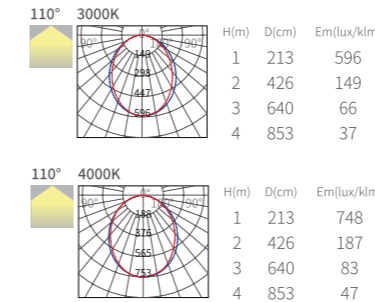


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 30W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 110°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black		<input type="checkbox"/> 3000K		<input type="checkbox"/> DIM Triac
		<input type="checkbox"/> 4000K		<input type="checkbox"/> DIM Bluetooth
		<input type="checkbox"/> 5000K		<input type="checkbox"/> DIM DALI
		<input type="checkbox"/> 6000K		<input type="checkbox"/> DIM Zigbee
		<input type="checkbox"/> 6500K		

SMS4005F | Magnetic track light



DIMENSION (mm)


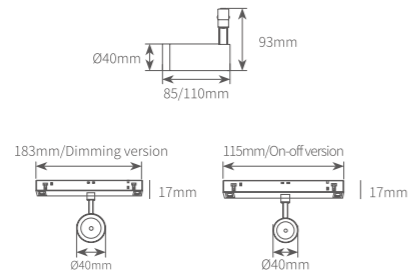


POWER SUPPLY
220-240V DC

LUMEN EFFICACY
75lm/W

CRI (Ra)
> 97


Light distribution

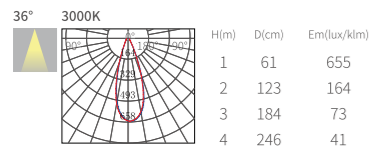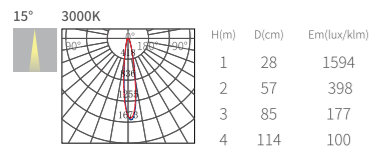


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 5W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 15°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 8W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 36°	<input type="checkbox"/> DIM Triac
		<input type="checkbox"/> 4000K	(Zoomable)	<input type="checkbox"/> DIM Bluetooth
		<input type="checkbox"/> 5000K		<input type="checkbox"/> DIM DALI
		<input type="checkbox"/> 6000K		<input type="checkbox"/> DIM Zigbee
		<input type="checkbox"/> 6500K		

SMS5415 | Magnetic track light



DIMENSION (mm)


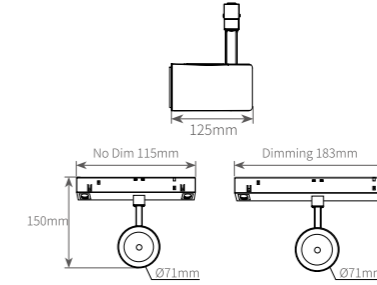


POWER SUPPLY
220-240V DC

LUMEN EFFICACY
87lm/W

CRI (Ra)
= 97


Light distribution

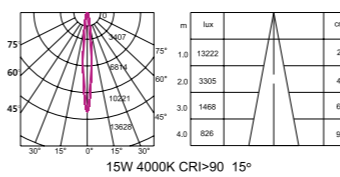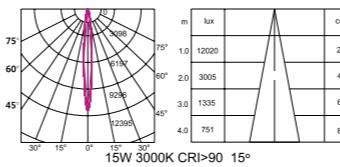


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 15W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 15°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black		<input type="checkbox"/> 3000K	<input type="checkbox"/> 24°	<input type="checkbox"/> DIM Triac
		<input type="checkbox"/> 4000K	<input type="checkbox"/> 36°	<input type="checkbox"/> DIM Bluetooth
		<input type="checkbox"/> 5000K		<input type="checkbox"/> DIM DALI
		<input type="checkbox"/> 6000K		<input type="checkbox"/> DIM Zigbee
		<input type="checkbox"/> 6500K		

SMS4010F | Magnetic track light



DIMENSION (mm)


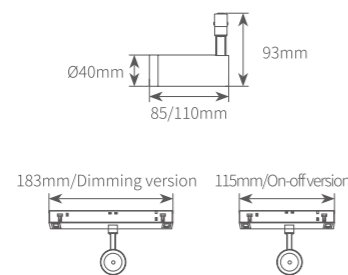


POWER SUPPLY
220-240V DC

LUMEN EFFICACY
75m/W

CRI (Ra)
> 97


Light distribution

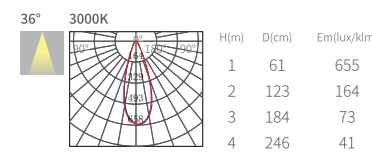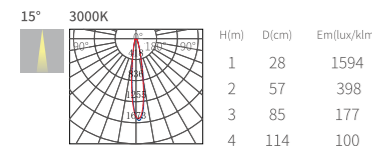


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 10W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 15°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 16W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 36°	<input type="checkbox"/> DIM Triac
		<input type="checkbox"/> 4000K	(Zoomable)	<input type="checkbox"/> DIM Bluetooth
		<input type="checkbox"/> 5000K		<input type="checkbox"/> DIM DALI
		<input type="checkbox"/> 6000K		<input type="checkbox"/> DIM Zigbee
		<input type="checkbox"/> 6500K		

SMS5515 | Magnetic track light



DIMENSION (mm)



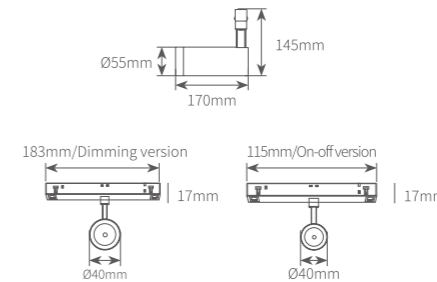


POWER SUPPLY
220-240V DC

LUMEN EFFICACY
82m/W

CRI (Ra)
= 90


Light distribution

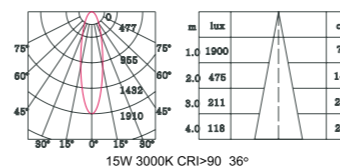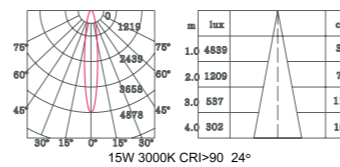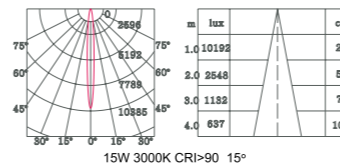


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 15W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 15°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black		<input type="checkbox"/> 3000K	<input type="checkbox"/> 24°	<input type="checkbox"/> DIM Triac
		<input type="checkbox"/> 4000K	<input type="checkbox"/> 36°	<input type="checkbox"/> DIM Bluetooth
		<input type="checkbox"/> 5000K		<input type="checkbox"/> DIM DALI
		<input type="checkbox"/> 6000K		<input type="checkbox"/> DIM Zigbee
		<input type="checkbox"/> 6500K		

SMS7615 | Magnetic track light



DIMENSION (mm)



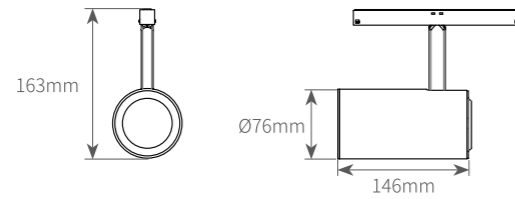


POWER SUPPLY
220-240V DC

LUMEN EFFICACY
82lm/W

CRI (Ra)
= 90


Light distribution

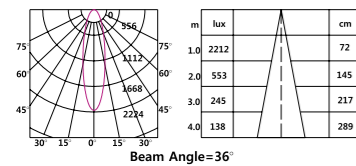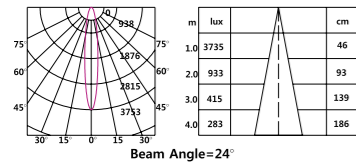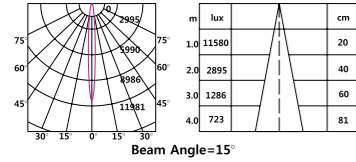


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 15W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 15°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 20W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 24°	<input type="checkbox"/> DIM Triac
	<input type="checkbox"/> 25W	<input type="checkbox"/> 4000K	<input type="checkbox"/> 36°	<input type="checkbox"/> DIM Bluetooth
	<input type="checkbox"/> 30W	<input type="checkbox"/> 5000K		<input type="checkbox"/> DIM DALI
		<input type="checkbox"/> 6000K		<input type="checkbox"/> DIM Zigbee
		<input type="checkbox"/> 6500K		

SMP4008 | Magnetic track light



DIMENSION (mm)



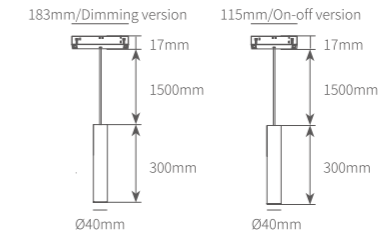


POWER SUPPLY
220-240V DC

LUMEN EFFICACY
80lm/W

CRI (Ra)
> 97


Light distribution

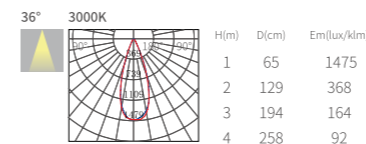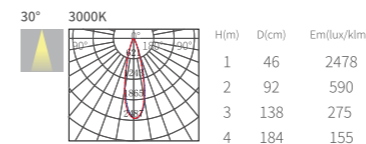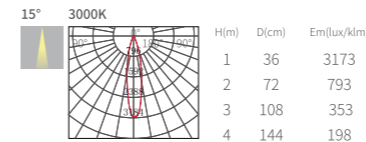


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 8W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 15°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 15W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 30°	<input type="checkbox"/> DIM Triac
		<input type="checkbox"/> 4000K	<input type="checkbox"/> 36°	<input type="checkbox"/> DIM Bluetooth
		<input type="checkbox"/> 5000K		<input type="checkbox"/> DIM DALI
		<input type="checkbox"/> 6000K		<input type="checkbox"/> DIM Zigbee
		<input type="checkbox"/> 6500K		

SMP13006 | Magnetic track light



DIMENSION (mm)

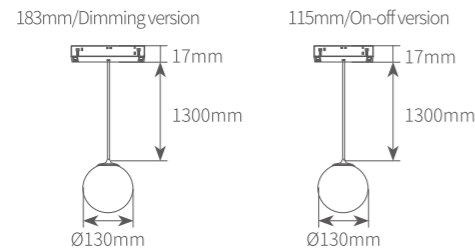


POWER SUPPLY
220-240V DC

LUMEN EFFICACY
60m/W

CRI (Ra)
> 97

Light distribution

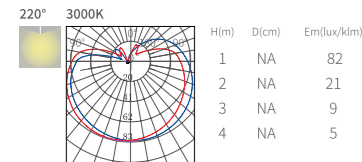


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 6W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 220°	<input type="checkbox"/> On-off
		<input type="checkbox"/> 3000K		<input type="checkbox"/> DIM Triac
		<input type="checkbox"/> 4000K		<input type="checkbox"/> DIM Bluetooth
		<input type="checkbox"/> 5000K		<input type="checkbox"/> DIM DALI
		<input type="checkbox"/> 6000K		<input type="checkbox"/> DIM Zigbee
		<input type="checkbox"/> 6500K		

SMP4008F | Magnetic track light



DIMENSION (mm)


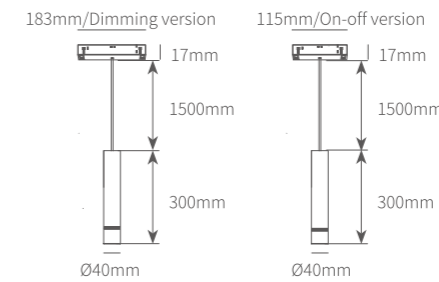


POWER SUPPLY
220-240V DC

LUMEN EFFICACY
82m/W

CRI (Ra)
= 90



Light distribution

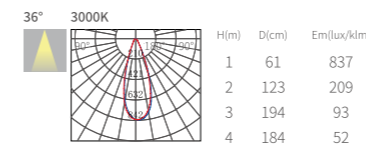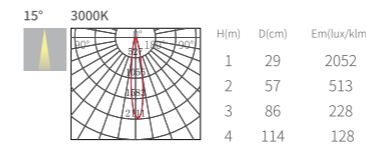


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 8W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 15°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 15W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 36°	<input type="checkbox"/> DIM Triac
		<input type="checkbox"/> 4000K	(Zoomable)	<input type="checkbox"/> DIM Bluetooth
		<input type="checkbox"/> 5000K		<input type="checkbox"/> DIM DALI
		<input type="checkbox"/> 6000K		<input type="checkbox"/> DIM Zigbee
		<input type="checkbox"/> 6500K		

MSSM-M | Magnetic track light

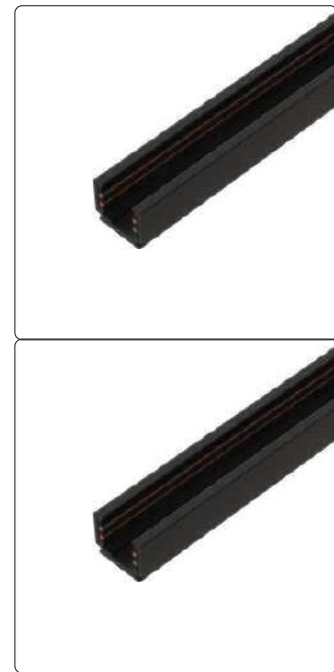

DIMENSION (mm)

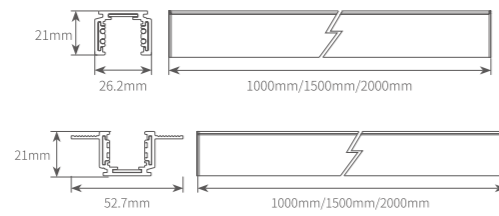

POWER SUPPLY
220-240V DC


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> Black	<input type="checkbox"/> 384W			


Accessory



MSMLS0606 | Magnetic track light



DIMENSION (mm)

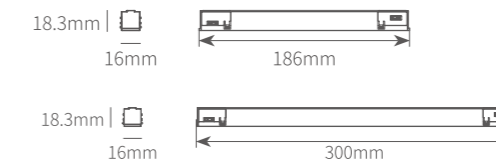


POWER SUPPLY
220-240V DC

LUMEN EFFICACY
60lm/W

CRI (Ra)
> 97

Light distribution

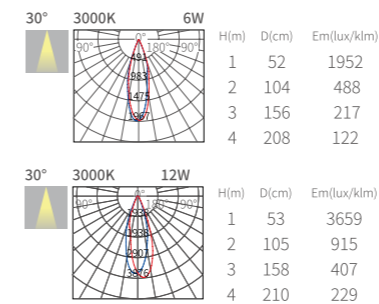


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 8W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 24°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 12W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 36°	<input type="checkbox"/> DIM Triac
		<input type="checkbox"/> 4000K		<input type="checkbox"/> DIM Bluetooth
		<input type="checkbox"/> 5000K		<input type="checkbox"/> DIM DALI
		<input type="checkbox"/> 6000K		<input type="checkbox"/> DIM Zigbee
		<input type="checkbox"/> 6500K		

MSMW2515 | Magnetic track light



DIMENSION (mm)

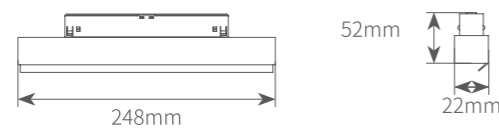


POWER SUPPLY
220-240V DC

LUMEN EFFICACY
65lm/W

CRI (Ra)
> 97



Light distribution

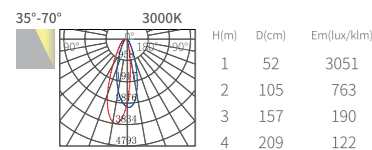


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 15W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 35°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black		<input type="checkbox"/> 3000K	<input type="checkbox"/> 70°	<input type="checkbox"/> DIM Triac
		<input type="checkbox"/> 4000K		<input type="checkbox"/> DIM Bluetooth
		<input type="checkbox"/> 5000K		<input type="checkbox"/> DIM DALI
		<input type="checkbox"/> 6000K		<input type="checkbox"/> DIM Zigbee
		<input type="checkbox"/> 6500K		

MSMLL3006 | Magnetic track light



DIMENSION (mm)




POWER SUPPLY
220-240V DC

LUMEN EFFICACY
82m/W

CRI (Ra)
> 97


Light distribution

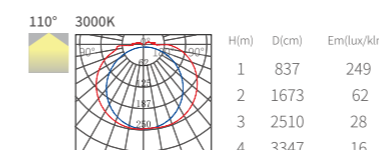


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 8W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 110°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 15W	<input type="checkbox"/> 3000K		<input type="checkbox"/> DIM Triac
		<input type="checkbox"/> 4000K		<input type="checkbox"/> DIM Bluetooth
		<input type="checkbox"/> 5000K		<input type="checkbox"/> DIM DALI
		<input type="checkbox"/> 6000K		<input type="checkbox"/> DIM Zigbee
		<input type="checkbox"/> 6500K		

RMS0202 | Magnetic track light



DIMENSION (mm)

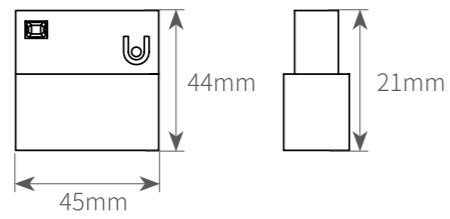

POWER SUPPLY
220-240V DC

LUMEN EFFICACY
80lm/W

CRI (Ra)
= 90


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 6W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 24°	<input type="checkbox"/> On-off
		<input type="checkbox"/> 3000K		<input type="checkbox"/> DIM Triac
		<input type="checkbox"/> 4000K		<input type="checkbox"/> DIM Bluetooth
		<input type="checkbox"/> 5000K		<input type="checkbox"/> DIM DALI
		<input type="checkbox"/> 6000K		<input type="checkbox"/> DIM Zigbee

RSMS0506 | Magnetic track light



DIMENSION (mm)

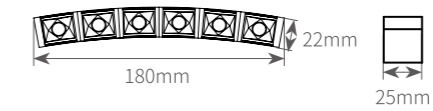

POWER SUPPLY
220-240V DC


LUMEN EFFICACY
80lm/W

CRI (Ra)
= 90


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 8W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 24°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black		<input type="checkbox"/> 3000K		<input type="checkbox"/> DIM Triac
		<input type="checkbox"/> 4000K		<input type="checkbox"/> DIM Bluetooth
		<input type="checkbox"/> 5000K		<input type="checkbox"/> DIM DALI
		<input type="checkbox"/> 6000K		<input type="checkbox"/> DIM Zigbee
		<input type="checkbox"/> 6500K		

RMS6007 | Magnetic track light



DIMENSION (mm)

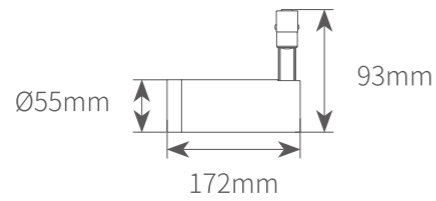

POWER SUPPLY
220-240V DC


LUMEN EFFICACY
80m/W

CRI (Ra)
= 90


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 7W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 24°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 12W	<input type="checkbox"/> 3000K		<input type="checkbox"/> DIM Triac
		<input type="checkbox"/> 4000K		<input type="checkbox"/> DIM Bluetooth
		<input type="checkbox"/> 5000K		<input type="checkbox"/> DIM DALI
		<input type="checkbox"/> 6000K		<input type="checkbox"/> DIM Zigbee
		<input type="checkbox"/> 6500K		

RSML18006 | Magnetic track light



DIMENSION (mm)

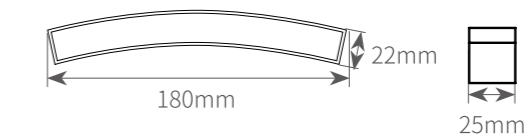

POWER SUPPLY
220-240V DC

LUMEN EFFICACY
80m/W

CRI (Ra)
= 90

Light distribution

Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 6W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 110°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black		<input type="checkbox"/> 3000K		<input type="checkbox"/> DIM Triac
		<input type="checkbox"/> 4000K		<input type="checkbox"/> DIM Bluetooth
		<input type="checkbox"/> 5000K		<input type="checkbox"/> DIM DALI
		<input type="checkbox"/> 6000K		<input type="checkbox"/> DIM Zigbee
		<input type="checkbox"/> 6500K		


WALL LIGHT

LL8103	083
WLB184	083
WLB1461	084
WLB174	084
HL7777	085
WLB196	085
WLB088	086
WLB082	086
WLB111	087
WLB103	087
WLB148	089
WLB100	089
WLB171	090






LL8103 | Wall light



DIMENSION (mm)

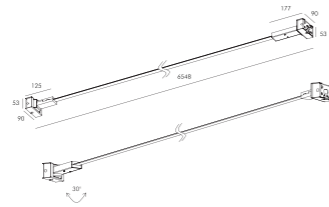

POWER SUPPLY
220-240V DC

LUMEN EFFICACY
60lm/W

CRI (Ra)
> 90

Information


Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> Black	<input type="checkbox"/> 44W <input type="checkbox"/> 66W <input type="checkbox"/> 132W	<input type="checkbox"/> 3000K <input type="checkbox"/> 4000K		<input type="checkbox"/> On-off <input type="checkbox"/> DIM Triac <input type="checkbox"/> DIM Bluetooth <input type="checkbox"/> DIM DALI <input type="checkbox"/> DIM Zigbee



WLB1461 | Wall light



DIMENSION (mm)

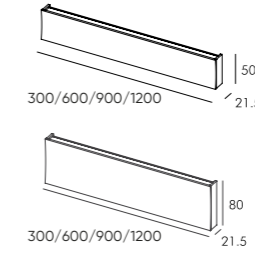

POWER SUPPLY
220-240V DC

LUMEN EFFICACY
60lm/W


CRI (Ra)
> 97

Information


Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White <input type="checkbox"/> Black	<input type="checkbox"/> 10W <input type="checkbox"/> 20W <input type="checkbox"/> 30W <input type="checkbox"/> 40W	<input type="checkbox"/> 2700K <input type="checkbox"/> 3000K <input type="checkbox"/> 4000K <input type="checkbox"/> 5000K <input type="checkbox"/> 6000K <input type="checkbox"/> 6500K		<input type="checkbox"/> On-off <input type="checkbox"/> DIM Triac <input type="checkbox"/> DIM Bluetooth <input type="checkbox"/> DIM DALI <input type="checkbox"/> DIM Zigbee



WLB184 | Wall light



DIMENSION (mm)

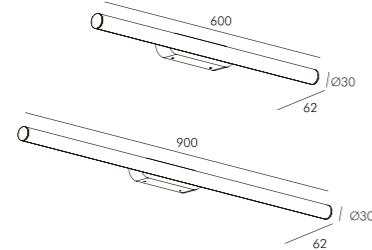

POWER SUPPLY
220-240V DC

LUMEN EFFICACY
60m/W

CRI (Ra)
> 90

Information


Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White <input type="checkbox"/> Black	<input type="checkbox"/> 15W <input type="checkbox"/> 20W	<input type="checkbox"/> 2700K <input type="checkbox"/> 3000K <input type="checkbox"/> 4000K <input type="checkbox"/> 5000K	<input type="checkbox"/> 110°	<input type="checkbox"/> On-off <input type="checkbox"/> DIM Triac <input type="checkbox"/> DIM Bluetooth <input type="checkbox"/> DIM DALI <input type="checkbox"/> DIM Zigbee



WLB174 | Wall light



DIMENSION (mm)

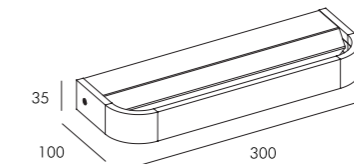

POWER SUPPLY
220-240V DC

LUMEN EFFICACY
60m/W



CRI (Ra)
> 90

Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White <input type="checkbox"/> Black <input type="checkbox"/> Black Gold	<input type="checkbox"/> 5W	<input type="checkbox"/> 2700K <input type="checkbox"/> 3000K <input type="checkbox"/> 4000K <input type="checkbox"/> 5000K	<input type="checkbox"/> 30° <input type="checkbox"/> 45°	<input type="checkbox"/> On-off <input type="checkbox"/> DIM Triac <input type="checkbox"/> DIM Bluetooth <input type="checkbox"/> DIM DALI <input type="checkbox"/> DIM Zigbee



HL7777 | Wall light



DIMENSION (mm)



POWER SUPPLY
220-240V DC

LUMEN EFFICACY
60lm/W


CRI (Ra)
> 90

Information


Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 14W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 110°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black		<input type="checkbox"/> 3000K		<input type="checkbox"/> DIM Triac
		<input type="checkbox"/> 4000K		<input type="checkbox"/> DIM Bluetooth
		<input type="checkbox"/> 5000K		<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee



WLB088 | Wall light



DIMENSION (mm)



POWER SUPPLY
220-240V DC

LUMEN EFFICACY
60lm/W


CRI (Ra)
> 90

Information


Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 1W	<input type="checkbox"/> 2700K		<input type="checkbox"/> On-off
<input type="checkbox"/> Black		<input type="checkbox"/> 3000K		<input type="checkbox"/> DIM Triac
		<input type="checkbox"/> 4000K		<input type="checkbox"/> DIM Bluetooth
		<input type="checkbox"/> 5000K		<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee



WLB196 | Wall light



DIMENSION (mm)




POWER SUPPLY
220-240V DC

LUMEN EFFICACY
60m/W


CRI (Ra)
> 90

Information


Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White Black	<input type="checkbox"/> 8W	<input type="checkbox"/> 3000K		<input type="checkbox"/> On-off
<input type="checkbox"/> White Grey				<input type="checkbox"/> DIM Triac
				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

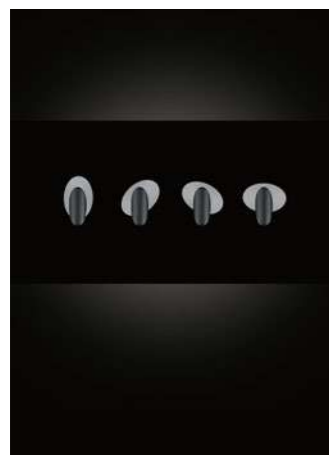

WLB082 | Wall light



DIMENSION (mm)

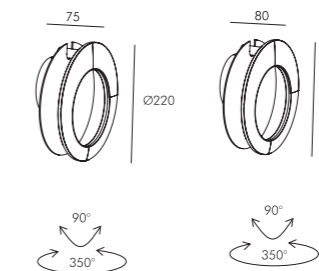

POWER SUPPLY
220-240V DC

LUMEN EFFICACY
60m/W


CRI (Ra)
> 90

Information


Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 5W	<input type="checkbox"/> 2700K		<input type="checkbox"/> On-off
	<input type="checkbox"/> 7W	<input type="checkbox"/> 3000K		<input type="checkbox"/> DIM Triac
		<input type="checkbox"/> 4000K		<input type="checkbox"/> DIM Bluetooth
		<input type="checkbox"/> 5000K		<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee



WLB111 | Wall light



DIMENSION (mm)

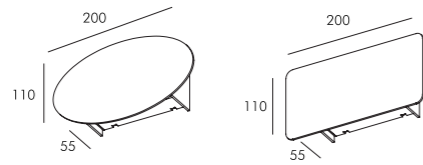

POWER SUPPLY
220-240V DC

LUMEN EFFICACY
60lm/W

CRI (Ra)
> 90


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 6W	<input type="checkbox"/> 2700K		<input type="checkbox"/> On-off
<input type="checkbox"/> Black Gold		<input type="checkbox"/> 3000K		<input type="checkbox"/> DIM Triac
		<input type="checkbox"/> 4000K		<input type="checkbox"/> DIM Bluetooth
		<input type="checkbox"/> 5000K		<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee




Wall light

WLB103 | Wall light



DIMENSION (mm)



POWER SUPPLY
220-240V DC

LUMEN EFFICACY
60m/W


CRI (Ra)
> 90

Information


Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 5W	<input type="checkbox"/> 2700K		<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 10W	<input type="checkbox"/> 3000K		<input type="checkbox"/> DIM Triac
	<input type="checkbox"/> 5W	<input type="checkbox"/> 4000K		<input type="checkbox"/> DIM Bluetooth
		<input type="checkbox"/> 5000K		<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee



WLB148 | Wall light



DIMENSION (mm)

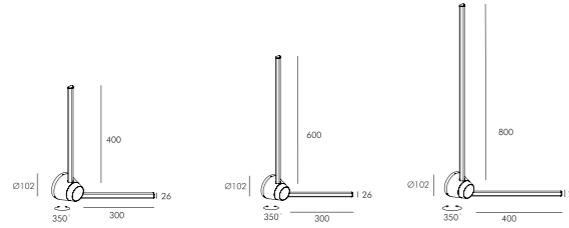

POWER SUPPLY
220-240V DC

LUMEN EFFICACY
60lm/W


CRI (Ra)
> 90

Information


Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> Black	<input type="checkbox"/> 12W <input type="checkbox"/> 17W <input type="checkbox"/> 23W	<input type="checkbox"/> 2700K <input type="checkbox"/> 3000K <input type="checkbox"/> 4000K <input type="checkbox"/> 5000K		<input type="checkbox"/> On-off <input type="checkbox"/> DIM Triac <input type="checkbox"/> DIM Bluetooth <input type="checkbox"/> DIM DALI <input type="checkbox"/> DIM Zigbee



WLB171 | Wall light



DIMENSION (mm)

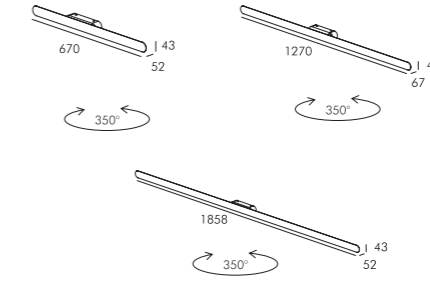

POWER SUPPLY
220-240V DC

LUMEN EFFICACY
60lm/W



CRI (Ra)
> 90

Information


Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White <input type="checkbox"/> Black	<input type="checkbox"/> 10W <input type="checkbox"/> 15W <input type="checkbox"/> 20W	<input type="checkbox"/> 2700K <input type="checkbox"/> 3000K <input type="checkbox"/> 4000K <input type="checkbox"/> 5000K		<input type="checkbox"/> On-off <input type="checkbox"/> DIM Triac <input type="checkbox"/> DIM Bluetooth <input type="checkbox"/> DIM DALI <input type="checkbox"/> DIM Zigbee



WLB100 | Wall light



DIMENSION (mm)

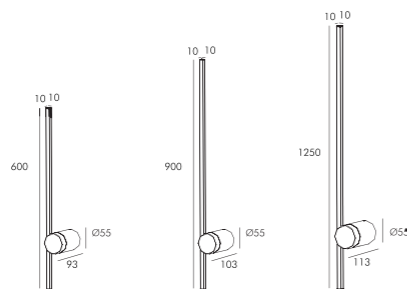


POWER SUPPLY
220-240V DC

LUMEN EFFICACY
60m/W

CRI (Ra)
> 90

Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> Black	<input type="checkbox"/> 7W <input type="checkbox"/> 9W <input type="checkbox"/> 12W	<input type="checkbox"/> 2700K <input type="checkbox"/> 3000K <input type="checkbox"/> 4000K		<input type="checkbox"/> On-off <input type="checkbox"/> DIM Triac <input type="checkbox"/> DIM Bluetooth <input type="checkbox"/> DIM DALI <input type="checkbox"/> DIM Zigbee

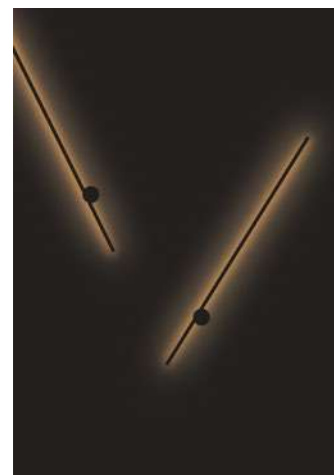


READING LIGHT


WLB137	95	LWA423	110
WLB136	95	LWA421	110
LWA200	96	LWA424	111
LWA203	96	LWA428	111
LWA205	97	LWA447	112
LWA219	97	LWA448	112
LWA220	98	LWA449	113
LWA230A	98	LWA473	113
LWA232A	99	LWA474	114
LWA297	99	LWA259	114
LWA315	100	LWA260	115
LWA317	100	LWA475	115
LWA319	101	LWA494	116
LWA321	101	LWA495	116
LWA323	102	LWA496	117
LWA330	102	LWA498	117
LWA331	103	LWA499	118
LWA333	103	LWA501	118
LWA323	104	LWA539	119
LWA334S	104	LWA540	119
LWA334A	105	LWA542	120
LWA335	105		
LWA374	106		
LWA375	106		
LWA187	107		
LWA376	107		
LWA416	108		
LWA417	108		
LWA418	109		
LWA420	109		



WLB137 | Reading light



DIMENSION (mm)



POWER SUPPLY
220-240V DC

LUMEN EFFICACY
60lm/W


CRI (Ra)
> 90

Information


Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 7W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 30°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black		<input type="checkbox"/> 3000K	<input type="checkbox"/> 45°	<input type="checkbox"/> DIM Triac
<input type="checkbox"/> Rose		<input type="checkbox"/> 4000K		<input type="checkbox"/> DIM Bluetooth
		<input type="checkbox"/> 5000K		<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee



LWA200 | Reading light



DIMENSION (mm)

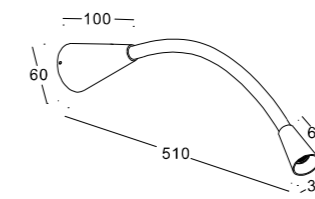

POWER SUPPLY
220-240V DC

LUMEN EFFICACY
40lm/W


CRI (Ra)
> 90

Information


Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 3W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 30°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee



WLB136 | Reading light



DIMENSION (mm)

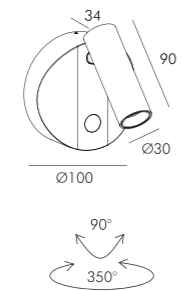

POWER SUPPLY
220-240V DC

LUMEN EFFICACY
60m/W


CRI (Ra)
> 90

Information


Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 7W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 30°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black		<input type="checkbox"/> 3000K	<input type="checkbox"/> 45°	<input type="checkbox"/> DIM Triac
<input type="checkbox"/> Rose		<input type="checkbox"/> 4000K		<input type="checkbox"/> DIM Bluetooth
		<input type="checkbox"/> 5000K		<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee



LWA203 | Reading light



DIMENSION (mm)

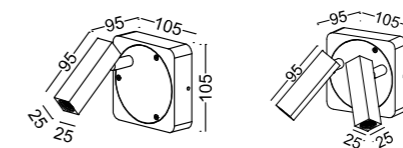

POWER SUPPLY
220-240V DC

LUMEN EFFICACY
40m/W


CRI (Ra)
> 90

Information


Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> Black	<input type="checkbox"/> 3W	<input type="checkbox"/> 3000K		<input type="checkbox"/> On-off
	<input type="checkbox"/> 2*3W			<input type="checkbox"/> DIM Triac
				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee



LWA205 | Reading light



DIMENSION (mm)

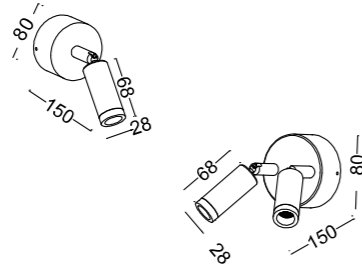

POWER SUPPLY
220-240V DC

LUMEN EFFICACY
40lm/W


CRI (Ra)
> 90

Information


Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> Black	<input type="checkbox"/> 3W <input type="checkbox"/> 2*3W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 30°	<input type="checkbox"/> On-off <input type="checkbox"/> DIM Triac <input type="checkbox"/> DIM Bluetooth <input type="checkbox"/> DIM DALI <input type="checkbox"/> DIM Zigbee



LWA219 | Reading light



DIMENSION (mm)



POWER SUPPLY
220-240V DC

LUMEN EFFICACY
60m/W


CRI (Ra)
> 90

Information


Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White <input type="checkbox"/> Black <input type="checkbox"/> Crom <input type="checkbox"/> Gold <input type="checkbox"/> Silver	<input type="checkbox"/> 3W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 30°	<input type="checkbox"/> On-off <input type="checkbox"/> DIM Triac <input type="checkbox"/> DIM Bluetooth <input type="checkbox"/> DIM DALI <input type="checkbox"/> DIM Zigbee



LWA220 | Reading light



DIMENSION (mm)



POWER SUPPLY
220-240V DC


LUMEN EFFICACY
40lm/W

CRI (Ra)
> 90


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White <input type="checkbox"/> Black <input type="checkbox"/> Crom <input type="checkbox"/> Silver	<input type="checkbox"/> 3W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 30°	<input type="checkbox"/> On-off <input type="checkbox"/> DIM Triac <input type="checkbox"/> DIM Bluetooth <input type="checkbox"/> DIM DALI <input type="checkbox"/> DIM Zigbee

LWA230A | Reading light



DIMENSION (mm)

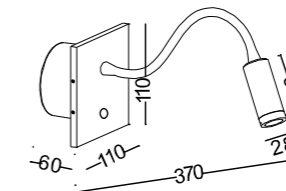

POWER SUPPLY
220-240V DC


LUMEN EFFICACY
40m/W

CRI (Ra)
> 90


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White <input type="checkbox"/> Black	<input type="checkbox"/> 3W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 30°	<input type="checkbox"/> On-off <input type="checkbox"/> DIM Triac <input type="checkbox"/> DIM Bluetooth <input type="checkbox"/> DIM DALI <input type="checkbox"/> DIM Zigbee

LWA232A | Reading light



DIMENSION (mm)

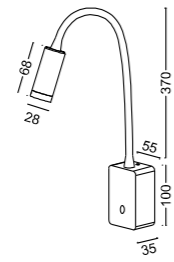

POWER SUPPLY
220-240V DC

LUMEN EFFICACY
40lm/W

CRI (Ra)
> 90

Information


Color	Power	CCT	Beam	LED-Driver
	<input type="checkbox"/> 3W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 30°	<input type="checkbox"/> On-off <input type="checkbox"/> DIM Triac <input type="checkbox"/> DIM Bluetooth <input type="checkbox"/> DIM DALI <input type="checkbox"/> DIM Zigbee



LWA315 | Reading light



DIMENSION (mm)



POWER SUPPLY
220-240V DC


LUMEN EFFICACY
40lm/W

CRI (Ra)
> 90


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White <input type="checkbox"/> Black <input type="checkbox"/> Crom	<input type="checkbox"/> 3W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 30°	<input type="checkbox"/> On-off <input type="checkbox"/> DIM Triac <input type="checkbox"/> DIM Bluetooth <input type="checkbox"/> DIM DALI <input type="checkbox"/> DIM Zigbee

LWA297 | Reading light



DIMENSION (mm)



POWER SUPPLY
220-240V DC

LUMEN EFFICACY
40m/W

CRI (Ra)
> 90

Information


Color	Power	CCT	Beam	LED-Driver
	<input type="checkbox"/> 6W	<input type="checkbox"/> 3000K		<input type="checkbox"/> On-off <input type="checkbox"/> DIM Triac <input type="checkbox"/> DIM Bluetooth <input type="checkbox"/> DIM DALI <input type="checkbox"/> DIM Zigbee



LWA317 | Reading light



DIMENSION (mm)



POWER SUPPLY
220-240V DC


LUMEN EFFICACY
40m/W

CRI (Ra)
> 90


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White <input type="checkbox"/> Black <input type="checkbox"/> Crom	<input type="checkbox"/> 3W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 30°	<input type="checkbox"/> On-off <input type="checkbox"/> DIM Triac <input type="checkbox"/> DIM Bluetooth <input type="checkbox"/> DIM DALI <input type="checkbox"/> DIM Zigbee

LWA319 | Reading light



DIMENSION (mm)

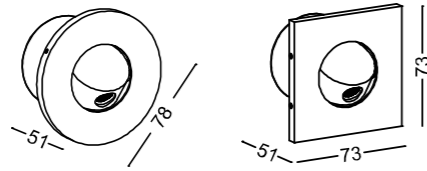

POWER SUPPLY
220-240V DC


LUMEN EFFICACY
40lm/W

CRI (Ra)
> 90


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 1W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 30°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

LWA323 | Reading light



DIMENSION (mm)



POWER SUPPLY
220-240V DC

LUMEN EFFICACY
40lm/W


CRI (Ra)
> 90

Information


Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 3W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 30°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
<input type="checkbox"/> Crom				<input type="checkbox"/> DIM Bluetooth
<input type="checkbox"/> Gold				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee



LWA321 | Reading light



DIMENSION (mm)

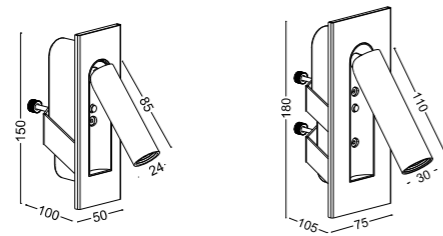

POWER SUPPLY
220-240V DC



LUMEN EFFICACY
40m/W

CRI (Ra)
> 90


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 3W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 30°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

LWA330 | Reading light



DIMENSION (mm)



POWER SUPPLY
220-240V DC

LUMEN EFFICACY
40m/W


CRI (Ra)
> 90

Information


Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 3W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 30°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
<input type="checkbox"/> Crom				<input type="checkbox"/> DIM Bluetooth
<input type="checkbox"/> Gold				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee



LWA331 | Reading light



DIMENSION (mm)

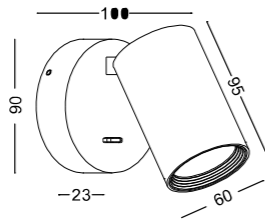

POWER SUPPLY
220-240V DC

LUMEN EFFICACY
40lm/W


CRI (Ra)
> 90

Information


Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 3W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 30°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee



LWA323 | Reading light



DIMENSION (mm)

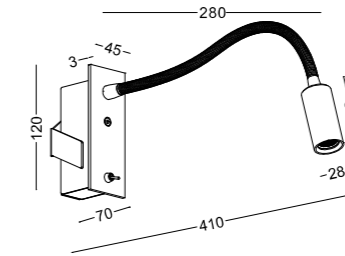

POWER SUPPLY
220-240V DC

LUMEN EFFICACY
40lm/W


CRI (Ra)
> 90

Information


Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 3W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 30°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
<input type="checkbox"/> Crom				<input type="checkbox"/> DIM Bluetooth
<input type="checkbox"/> Gold				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee



LWA333 | Reading light



DIMENSION (mm)



POWER SUPPLY
220-240V DC

LUMEN EFFICACY
40m/W


CRI (Ra)
> 90

Information


Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 3W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 30°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee



LWA334S | Reading light



DIMENSION (mm)

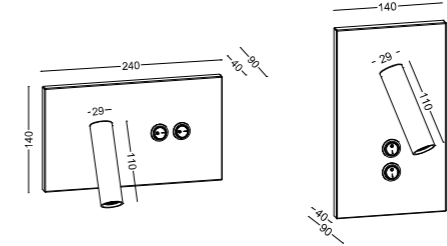

POWER SUPPLY
220-240V DC

LUMEN EFFICACY
75m/W


CRI (Ra)
> 90

Information


Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 2*3W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 30°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee



LWA334A | Reading light



DIMENSION (mm)

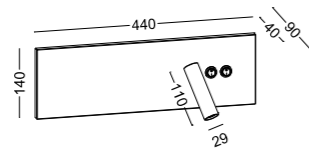

POWER SUPPLY
220-240V DC

LUMEN EFFICACY
40lm/W


CRI (Ra)
> 90

Information


Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 3W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 30°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee



LWA374 | Reading light



DIMENSION (mm)



POWER SUPPLY
220-240V DC

LUMEN EFFICACY
40lm/W


CRI (Ra)
> 90

Information


Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 5W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 30°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
<input type="checkbox"/> Silver				<input type="checkbox"/> DIM Bluetooth
<input type="checkbox"/> Gold				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee



LWA335 | Reading light



DIMENSION (mm)

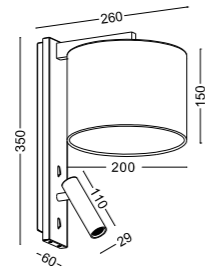

POWER SUPPLY
220-240V DC

LUMEN EFFICACY
40m/W


CRI (Ra)
> 90

Information


Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 3W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 30°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
<input type="checkbox"/> Crom				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee



LWA375 | Reading light



DIMENSION (mm)

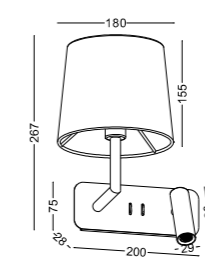

POWER SUPPLY
220-240V DC

LUMEN EFFICACY
40m/W


CRI (Ra)
> 90

Information


Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 3+4W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 30°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
<input type="checkbox"/> Crom				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee



LWA187 | Reading light



DIMENSION (mm)

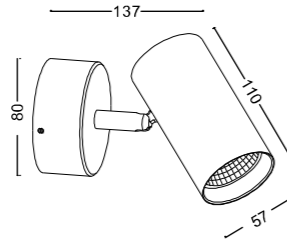

POWER SUPPLY
220-240V DC


LUMEN EFFICACY
40lm/W

CRI (Ra)
> 90


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 5W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 30°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

LWA416 | Reading light



DIMENSION (mm)

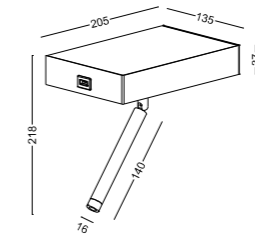

POWER SUPPLY
220-240V DC


LUMEN EFFICACY
40lm/W

CRI (Ra)
> 90


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 1W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 30°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

LWA376 | Reading light



DIMENSION (mm)

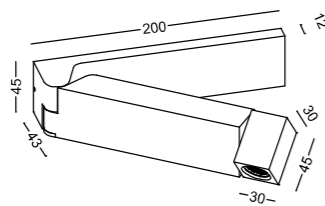

POWER SUPPLY
220-240V DC


LUMEN EFFICACY
40m/W

CRI (Ra)
> 90


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 3W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 30°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

LWA417 | Reading light



DIMENSION (mm)

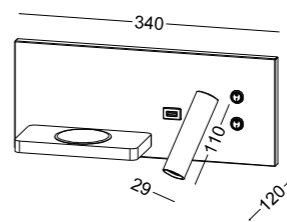

POWER SUPPLY
220-240V DC


LUMEN EFFICACY
80m/W

CRI (Ra)
> 90


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 3+4W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 30°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
<input type="checkbox"/> Crom				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

LWA418 | Reading light



DIMENSION (mm)

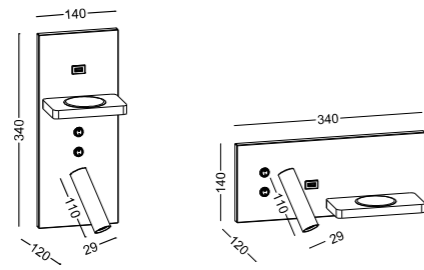

POWER SUPPLY
220-240V DC

LUMEN EFFICACY
80lm/W

CRI (Ra)
> 90

Information


Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 3+4W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 30°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee



LWA423 | Reading light



DIMENSION (mm)

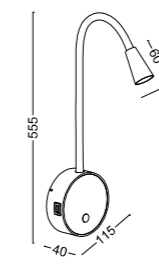

POWER SUPPLY
220-240V DC

LUMEN EFFICACY
40lm/W


CRI (Ra)
> 90

Information


Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 3W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 30°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee



LWA420 | Reading light



DIMENSION (mm)

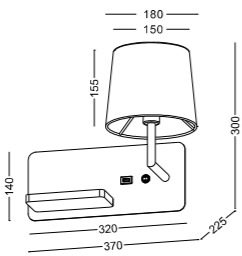

POWER SUPPLY
220-240V DC

LUMEN EFFICACY
40m/W

CRI (Ra)
> 90

Information


Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 4W	<input type="checkbox"/> 3000K		<input type="checkbox"/> On-off
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee



LWA421 | Reading light



DIMENSION (mm)

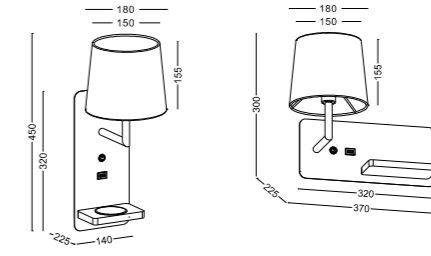

POWER SUPPLY
220-240V DC

LUMEN EFFICACY
60m/W


CRI (Ra)
> 90

Information


Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 4W	<input type="checkbox"/> 3000K		<input type="checkbox"/> On-off
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
<input type="checkbox"/> Crom				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee



LWA424 | Reading light



DIMENSION (mm)

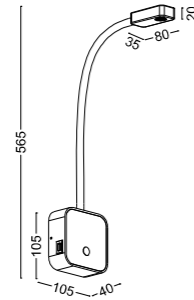

POWER SUPPLY
220-240V DC


LUMEN EFFICACY
80lm/W

CRI (Ra)
> 90


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 7W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 30°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

LWA447 | Reading light



DIMENSION (mm)



POWER SUPPLY
220-240V DC

LUMEN EFFICACY
58lm/W


CRI (Ra)
> 90

Information


Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 7W	<input type="checkbox"/> 3000K		<input type="checkbox"/> On-off
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
<input type="checkbox"/> Crom				<input type="checkbox"/> DIM Bluetooth
<input type="checkbox"/> Gold				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee



LWA428 | Reading light



DIMENSION (mm)

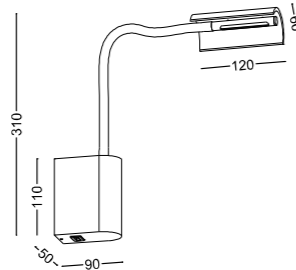

POWER SUPPLY
220-240V DC

LUMEN EFFICACY
60m/W


CRI (Ra)
> 90

Information


Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 3W	<input type="checkbox"/> 3000K		<input type="checkbox"/> On-off
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee



LWA448 | Reading light



DIMENSION (mm)



POWER SUPPLY
220-240V DC

LUMEN EFFICACY
60m/W


CRI (Ra)
> 90

Information


Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 3W	<input type="checkbox"/> 3000K		<input type="checkbox"/> On-off
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
<input type="checkbox"/> Crom				<input type="checkbox"/> DIM Bluetooth
<input type="checkbox"/> Gold				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee



LWA449 | Reading light



DIMENSION (mm)

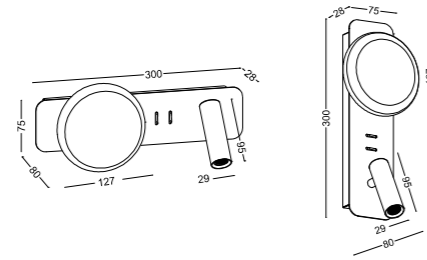

POWER SUPPLY
220-240V DC

LUMEN EFFICACY
60lm/W


CRI (Ra)
> 90

Information


Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 4.5W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 30°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee



LWA474 | Reading light



DIMENSION (mm)

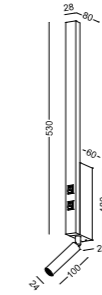

POWER SUPPLY
220-240V DC


LUMEN EFFICACY
100lm/W

CRI (Ra)
> 90

Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 3+5W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 30°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
<input type="checkbox"/> Crom				<input type="checkbox"/> DIM Bluetooth
<input type="checkbox"/> Gold				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

LWA473 | Reading light



DIMENSION (mm)



POWER SUPPLY
220-240V DC


LUMEN EFFICACY
100m/W

CRI (Ra)
> 90


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 3+6W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 30°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

LWA259 | Reading light



DIMENSION (mm)



POWER SUPPLY
220-240V DC


LUMEN EFFICACY
40m/W

CRI (Ra)
> 90


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 3W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 30°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
<input type="checkbox"/> Crom				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

LWA260 | Reading light



DIMENSION (mm)



POWER SUPPLY
220-240V DC


LUMEN EFFICACY
40lm/W

CRI (Ra)
> 90


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 3W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 30°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
<input type="checkbox"/> Crom				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

LWA494 | Reading light



DIMENSION (mm)

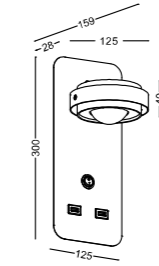

POWER SUPPLY
220-240V DC

LUMEN EFFICACY
86lm/W


CRI (Ra)
> 90

Information


Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 5W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 60°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee



LWA475 | Reading light



DIMENSION (mm)

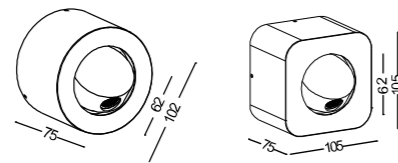

POWER SUPPLY
220-240V DC

LUMEN EFFICACY
40m/W


CRI (Ra)
> 90

Information


Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 3W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 30°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee



LWA495 | Reading light



DIMENSION (mm)

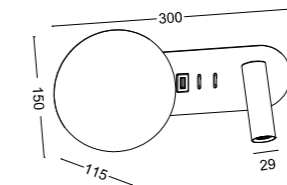

POWER SUPPLY
220-240V DC

LUMEN EFFICACY
130m/W


CRI (Ra)
> 90

Information


Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 3+4W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 30°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee



LWA496 | Reading light



DIMENSION (mm)



POWER SUPPLY
220-240V DC

LUMEN EFFICACY
53lm/W


CRI (Ra)
> 90

Information


Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 3+3W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 30°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee



LWA499 | Reading light



DIMENSION (mm)



POWER SUPPLY
220-240V DC

LUMEN EFFICACY
90lm/W


CRI (Ra)
> 90

Information


Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 3W	<input type="checkbox"/> 3000K		<input type="checkbox"/> On-off
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee



LWA498 | Reading light



DIMENSION (mm)



POWER SUPPLY
220-240V DC

LUMEN EFFICACY
40m/W


CRI (Ra)
> 90

Information


Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 3W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 30°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee



LWA501 | Reading light



DIMENSION (mm)

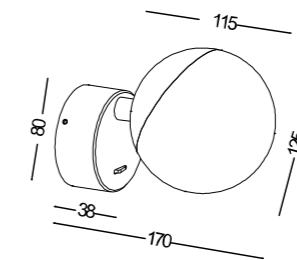

POWER SUPPLY
220-240V DC

LUMEN EFFICACY
680m/W


CRI (Ra)
> 90

Information


Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 4W	<input type="checkbox"/> 3000K		<input type="checkbox"/> On-off
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
<input type="checkbox"/> Gold				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee



LWA539 | Reading light



DIMENSION (mm)

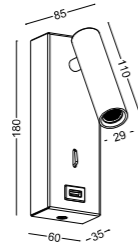

POWER SUPPLY
220-240V DC

LUMEN EFFICACY
40lm/W


CRI (Ra)
> 90

Information


Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 3W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 30°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee



LWA542 | Reading light



DIMENSION (mm)



POWER SUPPLY
220-240V DC

LUMEN EFFICACY
40lm/W


CRI (Ra)
> 90

Information


Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 3W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 30°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee



LWA540 | Reading light



DIMENSION (mm)



POWER SUPPLY
220-240V DC

LUMEN EFFICACY
40m/W

CRI (Ra)
> 90

Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 3W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 30°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee






STRIP LIGHT

352860L12V4.8W	125
3014120L12V9.6W	125
2835120L12V18W	126
3014120L24V9.6W	126
COB480L24V7W	127
COB480L400024V9W	127
2835120L12V15WIP68	128
RGBW60L600024V19.2W	128
2836120LRed12V18W	129
2836120LGreen12V18W	129
2836120LBlue12V18W	130
2835120LIceBlue12V9.6W	130
A2900	131
NE1615	132
NE1515	133





352860L12V4.8W | Strip light

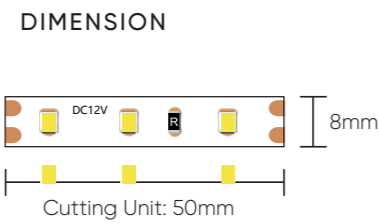

POWER SUPPLY
12VDC

LENGTH
5m




CRI (Ra)
> 90

LEDs per meter
60

Information

Power	CCT	LED-Driver
<input type="checkbox"/> 4.8W/m	<input type="checkbox"/> 2700K	<input type="checkbox"/> On-off
	<input type="checkbox"/> 3000K	<input type="checkbox"/> DIM Triac
	<input type="checkbox"/> 3500K	<input type="checkbox"/> DIM Bluetooth
	<input type="checkbox"/> 4000K	<input type="checkbox"/> DIM DALI
	<input type="checkbox"/> 5000K	<input type="checkbox"/> DIM Zigbee
	<input type="checkbox"/> 6000K	

3014120L12V9.6W | Strip light

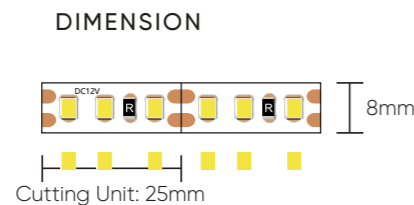

POWER SUPPLY
12VDC

LENGTH
5m


CRI (Ra)
> 90

LEDs per meter
120

Information

Power	CCT	LED-Driver
<input type="checkbox"/> 9.6W/m	<input type="checkbox"/> 2700K	<input type="checkbox"/> On-off
	<input type="checkbox"/> 3000K	<input type="checkbox"/> DIM Triac
	<input type="checkbox"/> 3500K	<input type="checkbox"/> DIM Bluetooth
	<input type="checkbox"/> 4000K	<input type="checkbox"/> DIM DALI
	<input type="checkbox"/> 5000K	<input type="checkbox"/> DIM Zigbee
	<input type="checkbox"/> 6000K	

2835120L12V18W | Strip light

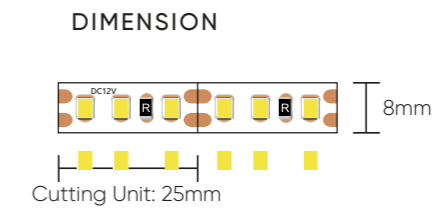

POWER SUPPLY
12VDC

LENGTH
5m


CRI (Ra)
> 90

LEDs per meter
120

Information

Power	CCT	LED-Driver
<input type="checkbox"/> 18W/m	<input type="checkbox"/> 2700K	<input type="checkbox"/> On-off
	<input type="checkbox"/> 3000K	<input type="checkbox"/> DIM Triac
	<input type="checkbox"/> 3500K	<input type="checkbox"/> DIM Bluetooth
	<input type="checkbox"/> 4000K	<input type="checkbox"/> DIM DALI
	<input type="checkbox"/> 5000K	<input type="checkbox"/> DIM Zigbee
	<input type="checkbox"/> 6000K	

3014120L24V9.6W | Strip light

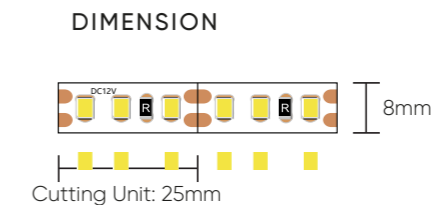

POWER SUPPLY
24VDC

LENGTH
5m



CRI (Ra)
> 90

LEDs per meter
120

Information

Power	CCT	LED-Driver
<input type="checkbox"/> 9.6W/m	<input type="checkbox"/> 2700K	<input type="checkbox"/> On-off
	<input type="checkbox"/> 3000K	<input type="checkbox"/> DIM Triac
	<input type="checkbox"/> 3500K	<input type="checkbox"/> DIM Bluetooth
	<input type="checkbox"/> 4000K	<input type="checkbox"/> DIM DALI
	<input type="checkbox"/> 5000K	<input type="checkbox"/> DIM Zigbee
	<input type="checkbox"/> 6000K	

COB480L24V7W | Strip light

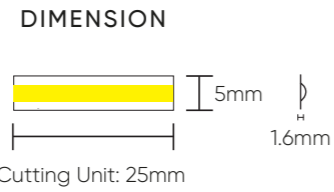

POWER SUPPLY
24VDC

LENGTH
5m

CRI (Ra)
> 90



LEDs per meter
480

Information

Power	CCT	LED-Driver
<input type="checkbox"/> 7W	<input type="checkbox"/> 2700K	<input type="checkbox"/> On-off
	<input type="checkbox"/> 3000K	<input type="checkbox"/> DIM Triac
	<input type="checkbox"/> 3500K	<input type="checkbox"/> DIM Bluetooth
	<input type="checkbox"/> 4000K	<input type="checkbox"/> DIM DALI
	<input type="checkbox"/> 5000K	<input type="checkbox"/> DIM Zigbee
	<input type="checkbox"/> 6000K	



2835120L12V15WIP68 | Strip light

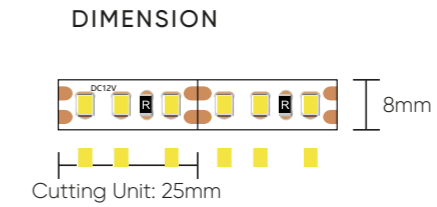

POWER SUPPLY
12VDC

LENGTH
5m

CRI (Ra)
> 90



LEDs per meter
120

Information

Power	CCT	LED-Driver
<input type="checkbox"/> 15W/m	<input type="checkbox"/> 2700K	<input type="checkbox"/> On-off
	<input type="checkbox"/> 3000K	<input type="checkbox"/> DIM Triac
	<input type="checkbox"/> 3500K	<input type="checkbox"/> DIM Bluetooth
	<input type="checkbox"/> 4000K	<input type="checkbox"/> DIM DALI
	<input type="checkbox"/> 5000K	<input type="checkbox"/> DIM Zigbee
	<input type="checkbox"/> 6000K	



COB480L400024V9W | Strip light

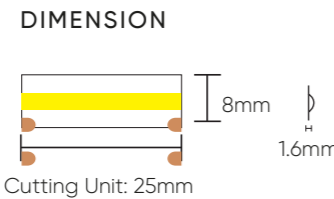

POWER SUPPLY
24VDC

LENGTH
5m

CRI (Ra)
> 90


LEDs per meter
480

Information

Power	CCT	LED-Driver
<input type="checkbox"/> 9.6W/m	<input type="checkbox"/> 2700K	<input type="checkbox"/> On-off
	<input type="checkbox"/> 3000K	<input type="checkbox"/> DIM Triac
	<input type="checkbox"/> 3500K	<input type="checkbox"/> DIM Bluetooth
	<input type="checkbox"/> 4000K	<input type="checkbox"/> DIM DALI
	<input type="checkbox"/> 5000K	<input type="checkbox"/> DIM Zigbee
	<input type="checkbox"/> 6000K	



RGBW60L600024V19.2W | Strip light

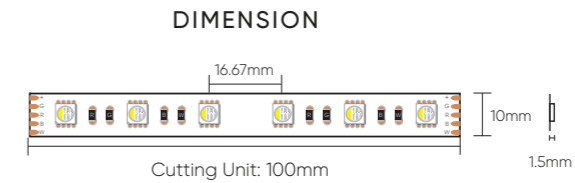

POWER SUPPLY
24VDC

LENGTH
5m

CRI (Ra)
> 90


LEDs per meter
60

Information


Power	CCT	LED-Driver
<input type="checkbox"/> 19.2W/m	<input type="checkbox"/> RGBW	<input type="checkbox"/> On-off
		<input type="checkbox"/> DIM Triac
		<input type="checkbox"/> DIM Bluetooth
		<input type="checkbox"/> DIM DALI
		<input type="checkbox"/> DIM Zigbee



2836120LRed12V18W | Strip light



DIMENSION

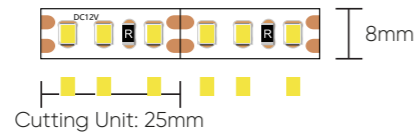

POWER SUPPLY
12VDC

LENGTH
5m

CRI (Ra)
 > 90

LEDs per meter
120

Information




Power	CCT	LED-Driver
<input type="checkbox"/> 18W/m	<input type="checkbox"/> Red	<input type="checkbox"/> On-off
		<input type="checkbox"/> DIM Triac
		<input type="checkbox"/> DIM Bluetooth
		<input type="checkbox"/> DIM DALI
		<input type="checkbox"/> DIM Zigbee

2836120LBlue12V18W | Strip light



DIMENSION

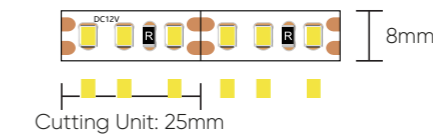

POWER SUPPLY
12VDC

LENGTH
5m

CRI (Ra)
 > 90


LEDs per meter
120

Information




Power	CCT	LED-Driver
<input type="checkbox"/> 18W/m	<input type="checkbox"/> Blue	<input type="checkbox"/> On-off
		<input type="checkbox"/> DIM Triac
		<input type="checkbox"/> DIM Bluetooth
		<input type="checkbox"/> DIM DALI
		<input type="checkbox"/> DIM Zigbee

2836120LGreen12V18W | Strip light



DIMENSION

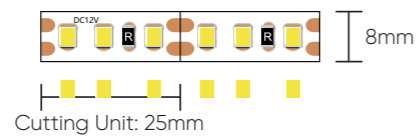

POWER SUPPLY
12VDC

LENGTH
5m

CRI (Ra)
 > 90

LEDs per meter
120

Information




Power	CCT	LED-Driver
<input type="checkbox"/> 18W/m	<input type="checkbox"/> Green	<input type="checkbox"/> On-off
		<input type="checkbox"/> DIM Triac
		<input type="checkbox"/> DIM Bluetooth
		<input type="checkbox"/> DIM DALI
		<input type="checkbox"/> DIM Zigbee

2835120LIceBlue12V9.6W | Strip light



DIMENSION

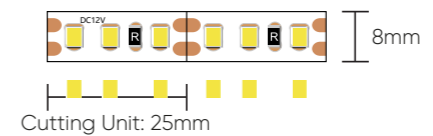

POWER SUPPLY
12VDC

LENGTH
5m



CRI (Ra)
 > 90

LEDs per meter
120

Information



Power	CCT	LED-Driver
<input type="checkbox"/> 9.6W/m	<input type="checkbox"/> IceBlue	<input type="checkbox"/> On-off
		<input type="checkbox"/> DIM Triac
		<input type="checkbox"/> DIM Bluetooth
		<input type="checkbox"/> DIM DALI
		<input type="checkbox"/> DIM Zigbee

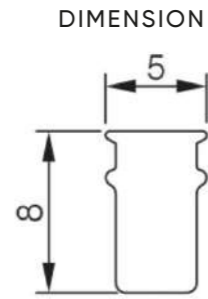

POWER SUPPLY
12VDC





LENGTH
5m

CRI (Ra)
 > 90

LEDs per meter
60

Information

Power	CCT	LED-Driver
<input type="checkbox"/> 8W/m	<input type="checkbox"/> 2700K	<input type="checkbox"/> On-off
	<input type="checkbox"/> 3000K	<input type="checkbox"/> DIM Triac
	<input type="checkbox"/> 3500K	<input type="checkbox"/> DIM Bluetooth
	<input type="checkbox"/> 4000K	<input type="checkbox"/> DIM DALI
	<input type="checkbox"/> 5000K	<input type="checkbox"/> DIM Zigbee
	<input type="checkbox"/> 6000K	

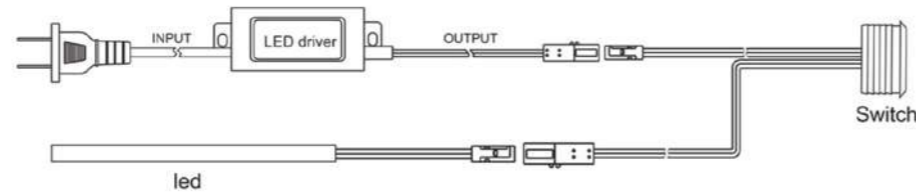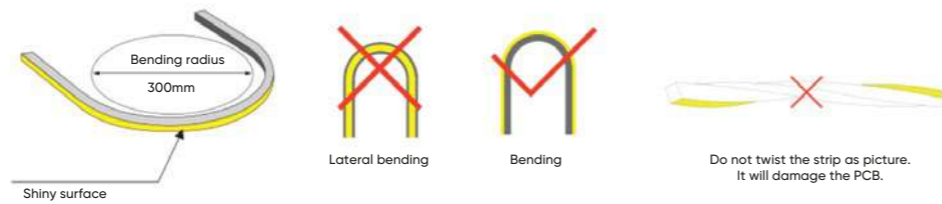

POWER SUPPLY
24VDC


LENGTH
5m

CRI (Ra)
 > 90


LEDs per meter
60

Information


Power	CCT	LED-Driver
<input type="checkbox"/> 10W/m	<input type="checkbox"/> 2700K	<input type="checkbox"/> On-off
	<input type="checkbox"/> 3000K	<input type="checkbox"/> DIM Triac
	<input type="checkbox"/> 3500K	<input type="checkbox"/> DIM Bluetooth
	<input type="checkbox"/> 4000K	<input type="checkbox"/> DIM DALI
	<input type="checkbox"/> 5000K	<input type="checkbox"/> DIM Zigbee
	<input type="checkbox"/> 6000K	

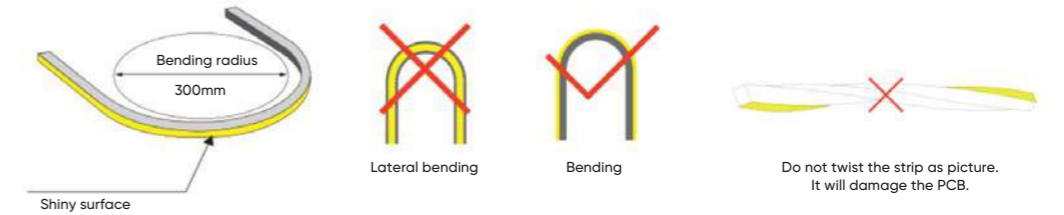

1. Regular connection

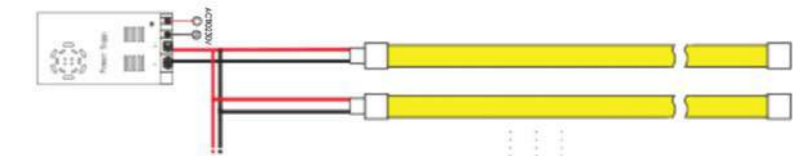


2. Connection with dimmer

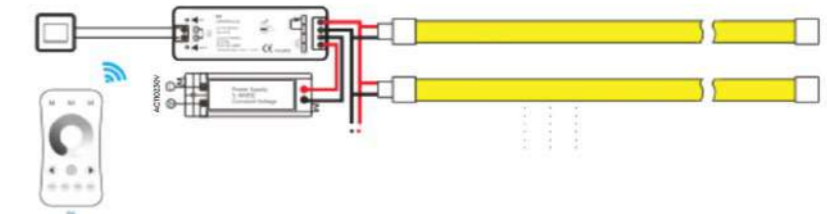



DIMENSION

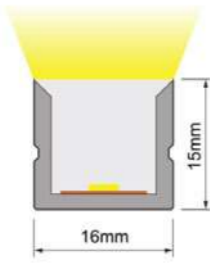

POWER SUPPLY
24VDC


LENGTH
5m

CRI (Ra)
> 90


LEDs per meter
60

Information



Power	CCT	LED-Driver
<input type="checkbox"/> 10W/m	<input type="checkbox"/> 2700K	<input type="checkbox"/> On-off
	<input type="checkbox"/> 3000K	<input type="checkbox"/> DIM Triac
	<input type="checkbox"/> 3500K	<input type="checkbox"/> DIM Bluetooth
	<input type="checkbox"/> 4000K	<input type="checkbox"/> DIM DALI
	<input type="checkbox"/> 5000K	<input type="checkbox"/> DIM Zigbee
	<input type="checkbox"/> 6000K	

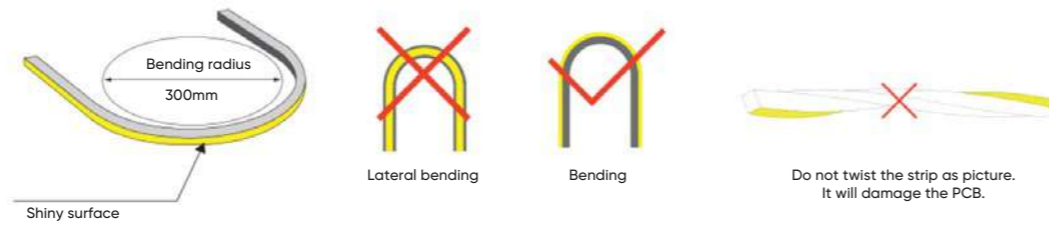

1. Regular connection

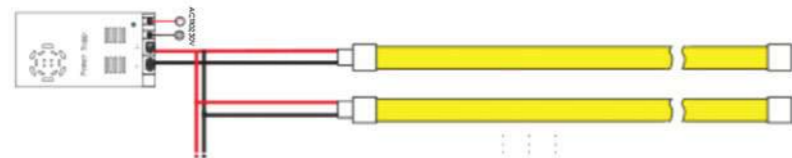

2. Connection with dimmer

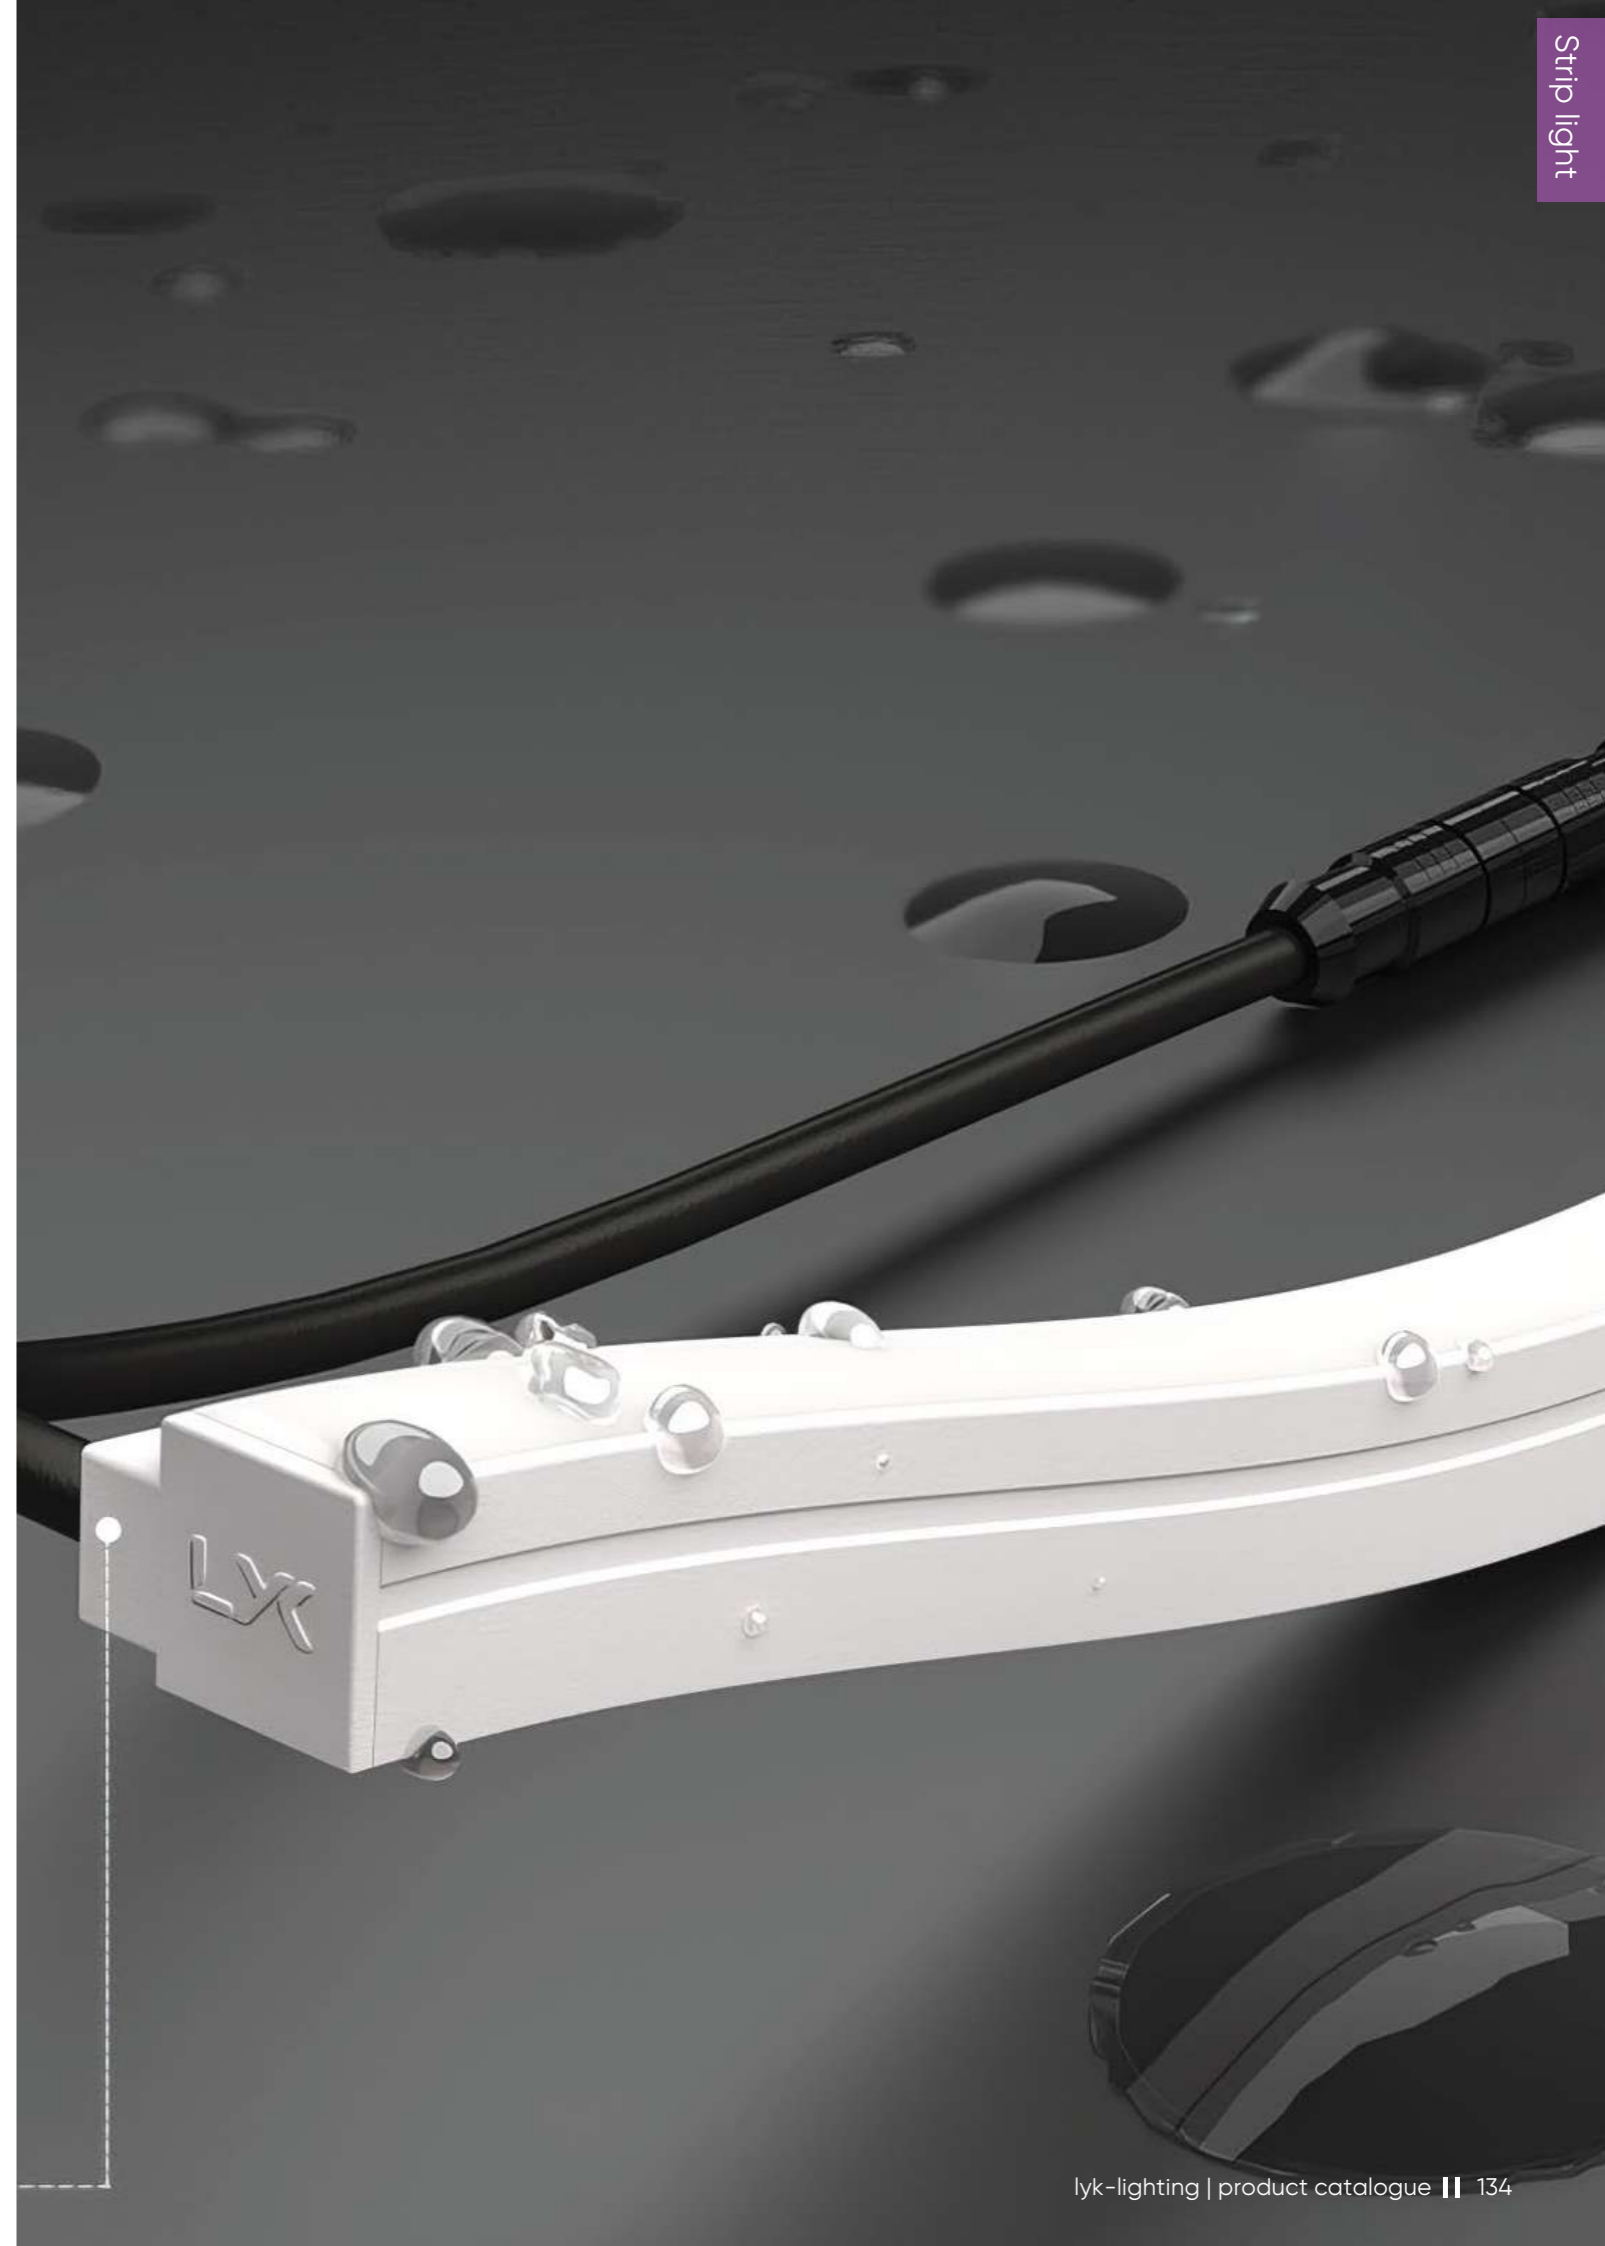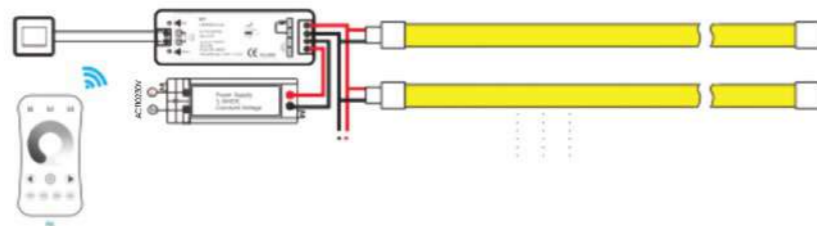


ALUMINUM PROFILE



U1008	139	U2206	146	V1919C	153
U0608	139	U2212	146	V2929	153
U1010	139	U3007	146	V2929B	153
U1207	139	U2711	146	V3030	153
U1208	140	U3021	147	V3030A	154
U1407	140	U2310A	147	V3030B	154
U1506	140	U3813	147	V3030B	154
U1609	140	U5608	147	O100B	154
U1613	141	U1909R	148	O120	155
U1612	141	U1909S	148	O2020	155
U1715C	141	U2016GL	148	O80A	155
U1715D	141	U2020B	148	O60	155
U1815	142	U2020C	149	O60A	156
U1809	142	U2626B	149	O60B	156
U1908	142	U2623	149	R1449	156
U2121	142	U2623A	149	R3015	156
U2321	143	U7635	150	R4390	157
U2310	143	U9032A	150	R9359	157
U3010B	143	U9135	150		
U1015	143	U11735	150		
U1015C	144	U14232D	151		
U1215	144	U14232D	151		
U1215S	144	U3573	151		
U1415	144	U3566A	151		
U1415C	145	U10270	152		
U2507D	145	V1616A	152		
U2515C	145	V1616	152		
U2507	145	V1919	152		




U1008 | Aluminum profile

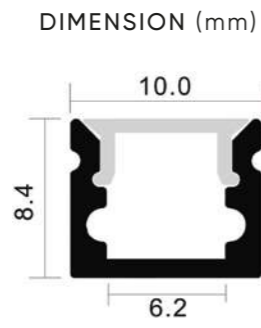


LENGTH
1m/2m/3m

U1208 | Aluminum profile

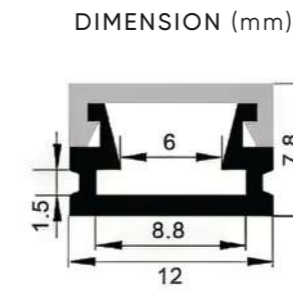


LENGTH
1m/2m/3m

U0608 | Aluminum profile

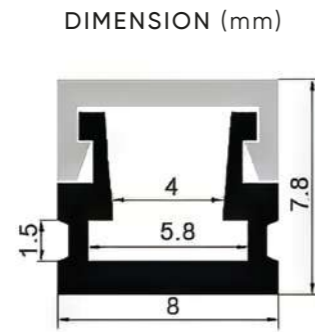



LENGTH
1m/2m/3m

U1407 | Aluminum profile

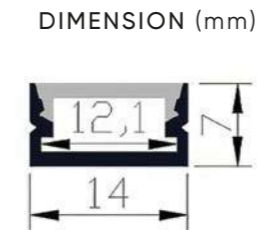


LENGTH
1m/2m/3m

U1010 | Aluminum profile

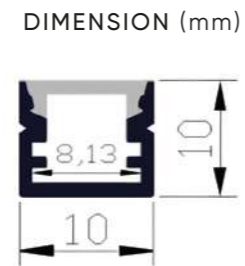



LENGTH
1m/2m/3m

U1506 | Aluminum profile

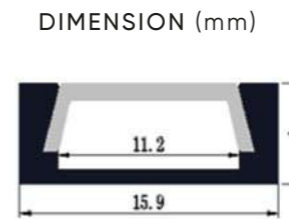


LENGTH
1m/2m/3m

U1207 | Aluminum profile



LENGTH
1m/2m/3m

U1609 | Aluminum profile




LENGTH
1m/2m/3m

U1613 | Aluminum profile



DIMENSION (mm)




LENGTH
1m/2m/3m

U1612 | Aluminum profile



DIMENSION (mm)




LENGTH
1m/2m/3m

U1715C | Aluminum profile




DIMENSION (mm)




LENGTH
1m/2m/3m

U1715D | Aluminum profile



DIMENSION (mm)



LENGTH
1m/2m/3m

U1815 | Aluminum profile



DIMENSION (mm)




LENGTH
1m/2m/3m

U1809 | Aluminum profile



DIMENSION (mm)

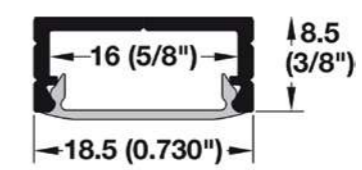


LENGTH
1m/2m/3m

U1908 | Aluminum profile



DIMENSION (mm)




LENGTH
1m/2m/3m

U2121 | Aluminum profile



DIMENSION (mm)

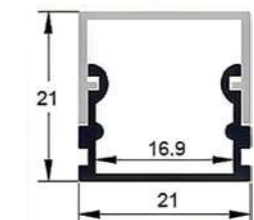


LENGTH
1m/2m/3m

U2321 | Aluminum profile



DIMENSION (mm)

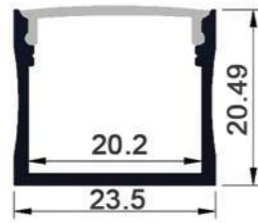


LENGTH
1m/2m/3m

U1015C | Aluminum profile



DIMENSION (mm)




LENGTH
1m/2m/3m

U2310 | Aluminum profile



DIMENSION (mm)

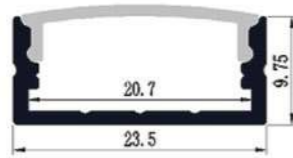


LENGTH
1m/2m/3m

U1215 | Aluminum profile



DIMENSION (mm)




LENGTH
1m/2m/3m

U3010B | Aluminum profile




DIMENSION (mm)

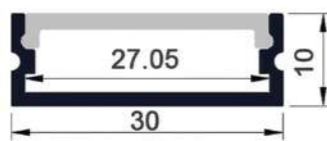


LENGTH
1m/2m/3m

U1215S | Aluminum profile



DIMENSION (mm)




LENGTH
1m/2m/3m

U1015 | Aluminum profile




DIMENSION (mm)




LENGTH
1m/2m/3m

U1415 | Aluminum profile



DIMENSION (mm)




LENGTH
1m/2m/3m

U1415C | Aluminum profile



DIMENSION (mm)




LENGTH
1m/2m/3m

U2206 | Aluminum profile



DIMENSION (mm)

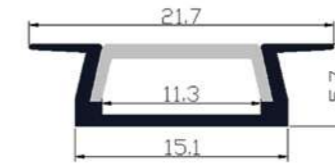


LENGTH
1m/2m/3m

U2507D | Aluminum profile



DIMENSION (mm)




LENGTH
1m/2m/3m

U2212 | Aluminum profile



DIMENSION (mm)

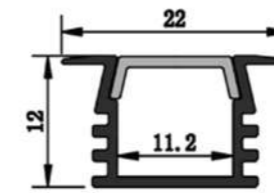

LENGTH
1m/2m/3m

U2515C | Aluminum profile



DIMENSION (mm)




LENGTH
1m/2m/3m

U3007 | Aluminum profile



DIMENSION (mm)

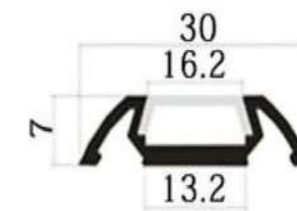

LENGTH
1m/2m/3m

U2507 | Aluminum profile



DIMENSION (mm)




LENGTH
1m/2m/3m

U2711 | Aluminum profile



DIMENSION (mm)

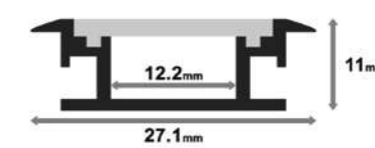


LENGTH
1m/2m/3m

U3021 | Aluminum profile



DIMENSION (mm)

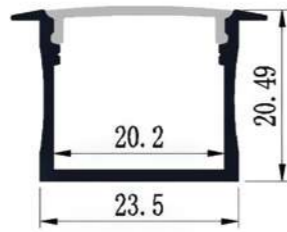


LENGTH
1m/2m/3m

U1909R | Aluminum profile



DIMENSION (mm)

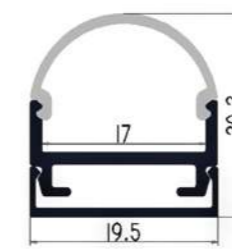


LENGTH
1m/2m/3m

U2310A | Aluminum profile



DIMENSION (mm)

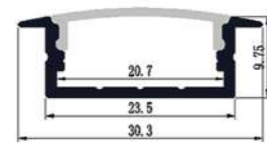


LENGTH
1m/2m/3m

U1909S | Aluminum profile



DIMENSION (mm)




LENGTH
1m/2m/3m

U3813 | Aluminum profile



DIMENSION (mm)

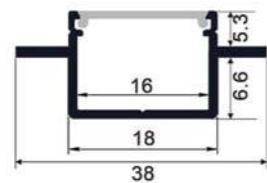


LENGTH
1m/2m/3m

U2016GL | Aluminum profile



DIMENSION (mm)




LENGTH
1m/2m/3m

U5608 | Aluminum profile



DIMENSION (mm)

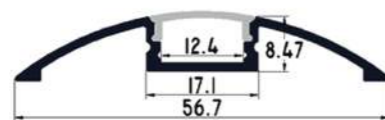


LENGTH
1m/2m/3m

U2020B | Aluminum profile




DIMENSION (mm)




LENGTH
1m/2m/3m

U2020C | Aluminum profile



DIMENSION (mm)

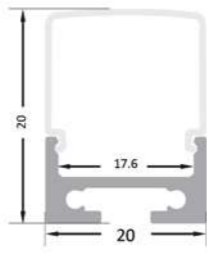


LENGTH
1m/2m/3m

U7635 | Aluminum profile




DIMENSION (mm)

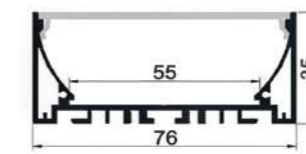


LENGTH
1m/2m/3m

U2626B | Aluminum profile



DIMENSION (mm)




LENGTH
1m/2m/3m

U9032A | Aluminum profile



DIMENSION (mm)

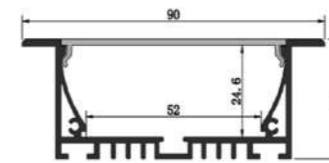

LENGTH
1m/2m/3m

U2623 | Aluminum profile



DIMENSION (mm)




LENGTH
1m/2m/3m

U9135 | Aluminum profile



DIMENSION (mm)

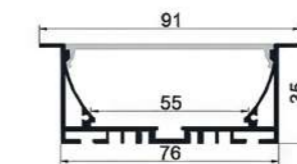

LENGTH
1m/2m/3m

U2623A | Aluminum profile




DIMENSION (mm)




LENGTH
1m/2m/3m

U11735 | Aluminum profile



DIMENSION (mm)

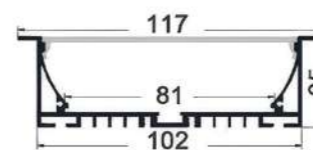


LENGTH
1m/2m/3m

U14232D | Aluminum profile



DIMENSION (mm)

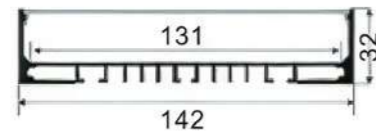


LENGTH
1m/2m/3m

U10270 | Aluminum profile



DIMENSION (mm)




LENGTH
1m/2m/3m

U3575 | Aluminum profile



DIMENSION (mm)

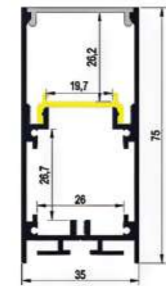


LENGTH
1m/2m/3m

V1616A | Aluminum profile



DIMENSION (mm)




LENGTH
1m/2m/3m

U3573 | Aluminum profile



DIMENSION (mm)

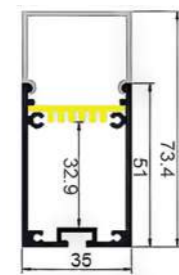


LENGTH
1m/2m/3m

V1616 | Aluminum profile



DIMENSION (mm)




LENGTH
1m/2m/3m

U3566A | Aluminum profile



DIMENSION (mm)

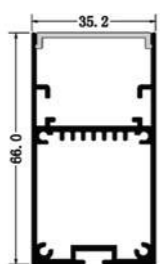


LENGTH
1m/2m/3m

V1919 | Aluminum profile



DIMENSION (mm)




LENGTH
1m/2m/3m

V1919C | Aluminum profile



DIMENSION (mm)




LENGTH
1m/2m/3m

V3030A | Aluminum profile



DIMENSION (mm)




LENGTH
1m/2m/3m

V2929 | Aluminum profile



DIMENSION (mm)




LENGTH
1m/2m/3m

V3030B | Aluminum profile



DIMENSION (mm)




LENGTH
1m/2m/3m

V2929B | Aluminum profile



DIMENSION (mm)




LENGTH
1m/2m/3m

O100A | Aluminum profile



DIMENSION (mm)




LENGTH
1m/2m/3m

V3030 | Aluminum profile



DIMENSION (mm)




LENGTH
1m/2m/3m

O100B | Aluminum profile



DIMENSION (mm)




LENGTH
1m/2m/3m

O120 | Aluminum profile



DIMENSION (mm)




LENGTH
1m/2m/3m

O60A | Aluminum profile



DIMENSION (mm)

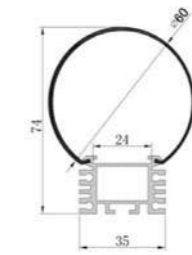


LENGTH
1m/2m/3m

O2020 | Aluminum profile



DIMENSION (mm)




LENGTH
1m/2m/3m

O60B | Aluminum profile



DIMENSION (mm)

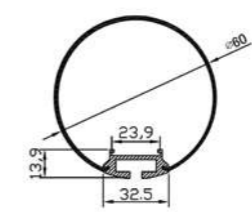


LENGTH
1m/2m/3m

O80A | Aluminum profile



DIMENSION (mm)

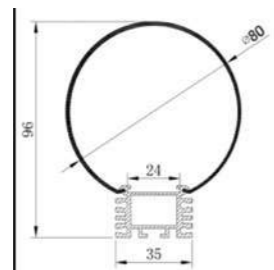


LENGTH
1m/2m/3m

R1449 | Aluminum profile



DIMENSION (mm)

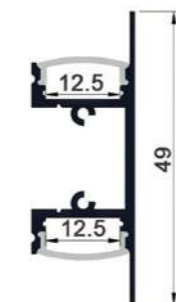


LENGTH
1m/2m/3m

O60 | Aluminum profile



DIMENSION (mm)




LENGTH
1m/2m/3m

R3015 | Aluminum profile



DIMENSION (mm)




LENGTH
1m/2m/3m

R4390 | Aluminum profile



DIMENSION (mm)

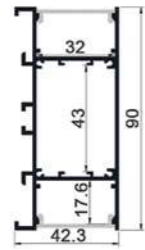


LENGTH
1m/2m/3m

R9359 | Aluminum profile



DIMENSION (mm)

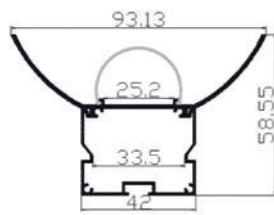

LENGTH
1m/2m/3m



CEILING LIGHT

LBL183	274
LBL184	274
LBL185	274
LDC402	276
LDC403	276
LDC414	276
LDC415	276
LBL186	277
LBL187	277
LBL249	277
LBL250	277
LBL272	278
LBL298	280
LDC469	282
LDC470	282
LDC471	282
LDC472	282
LDC335	284
LDC336	284
LDC337	284
LDC411	284
LDC412	284
LDC413	284






LBL249 | Ceiling light



DIMENSION (mm)

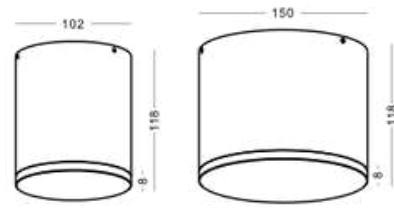

POWER SUPPLY
220-240V DC

LUMEN EFFICACY
80lm/W

CRI (Ra)
> 90


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 12W	<input type="checkbox"/> 3000K		<input type="checkbox"/> On-o
<input type="checkbox"/> Grey	<input type="checkbox"/> 20W			<input type="checkbox"/> DIM Triac
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

LDC414 | Ceiling light



DIMENSION (mm)

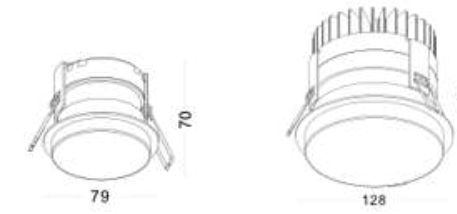

POWER SUPPLY
220-240V DC

LUMEN EFFICACY
100lm/W

CRI (Ra)
> 80

Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 6W	<input type="checkbox"/> 3000K		<input type="checkbox"/> On-o
<input type="checkbox"/> Grey	<input type="checkbox"/> 12W			<input type="checkbox"/> DIM Triac
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

LDC402 | Ceiling light



DIMENSION (mm)



POWER SUPPLY
220-240V DC

LUMEN EFFICACY
80lm/W

CRI (Ra)
> 80


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> Gold	<input type="checkbox"/> 5W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 35°	<input type="checkbox"/> On-o
<input type="checkbox"/> White	<input type="checkbox"/> 12W			<input type="checkbox"/> DIM Triac
<input type="checkbox"/> Black	<input type="checkbox"/> 20W			<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

LBL186 | Ceiling light



DIMENSION (mm)

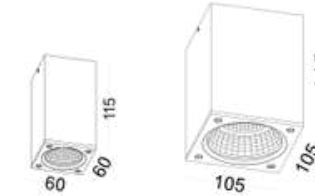

POWER SUPPLY
220-240V DC

LUMEN EFFICACY
75lm/W

CRI (Ra)
> 90


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 5W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 38°	<input type="checkbox"/> On-o
<input type="checkbox"/> Grey	<input type="checkbox"/> 12W			<input type="checkbox"/> DIM Triac
<input type="checkbox"/> Black	<input type="checkbox"/> 20W			<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

LBL183 | Ceiling light



DIMENSION (mm)

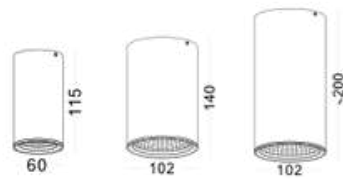


POWER SUPPLY
220-240V DC

LUMEN EFFICACY
75lm/W

CRI (Ra)
>90

Information


Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 5W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 35°	<input type="checkbox"/> On-o
<input type="checkbox"/> Black	<input type="checkbox"/> 12W			<input type="checkbox"/> DIM Triac
	<input type="checkbox"/> 20W			<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

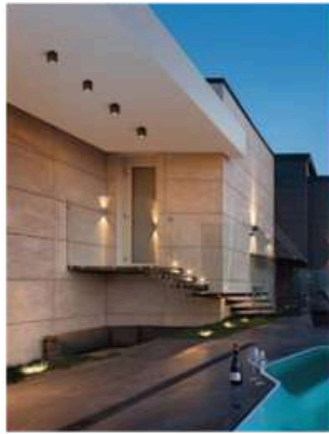

LBL298 | Ceiling light



DIMENSION (mm)



POWER SUPPLY
220-240V DC

LUMEN EFFICACY
100lm/W

CRI (Ra)
>90

Information


Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 10W	<input type="checkbox"/> 3000K		<input type="checkbox"/> On-o
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee



LBL272 | Ceiling light



DIMENSION (mm)

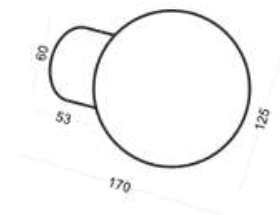


POWER SUPPLY
220-240V DC

LUMEN EFFICACY
80lm/W

CRI (Ra)
>80

Information


Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 5W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 35°	<input type="checkbox"/> On-o
<input type="checkbox"/> Black	<input type="checkbox"/> 12W			<input type="checkbox"/> DIM Triac
	<input type="checkbox"/> 20W			<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

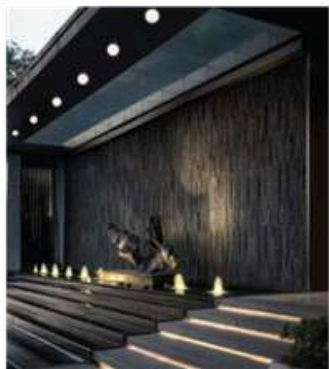

LDC469 | Ceiling light



DIMENSION (mm)

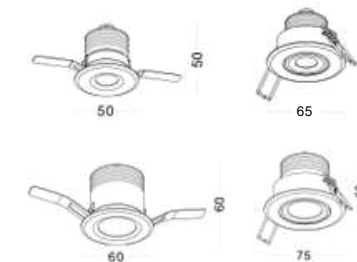

POWER SUPPLY
220-240V DC

LUMEN EFFICACY
72lm/W

CRI (Ra)
>90

Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 5W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 30°	<input type="checkbox"/> On-o
<input type="checkbox"/> Grey	<input type="checkbox"/> 12W		<input type="checkbox"/> 38°	<input type="checkbox"/> DIM Triac
<input type="checkbox"/> Black	<input type="checkbox"/> 20W			<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee



LDC335 | Ceiling light



DIMENSION (mm)



POWER SUPPLY
220-240V DC

LUMEN EFFICACY
75lm/W

CRI (Ra)
90

Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 6W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 38°	<input type="checkbox"/> On-o
<input type="checkbox"/> Grey	<input type="checkbox"/> 9W			<input type="checkbox"/> DIM Triac
<input type="checkbox"/> Black	<input type="checkbox"/> 12W			<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

LDC411 | Ceiling light



DIMENSION (mm)



POWER SUPPLY
220-240V DC

LUMEN EFFICACY
75lm/W

CRI (Ra)
90

Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 5W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 38°	<input type="checkbox"/> On-o
<input type="checkbox"/> Grey	<input type="checkbox"/> 12W			<input type="checkbox"/> DIM Triac
<input type="checkbox"/> Black	<input type="checkbox"/> 20W			<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee




CWEAILILN GLIG LHIGHT T


LWBLA128931A	217	LWA38	204
LWBLA148940	43	4	204
LWBLA128155	217	LWA38	205
L WD CA 43 06 26	45	5	205
L WD CA 43 06 39	217	LWA45	206
L WD CA 43 17 41	47	3	206
LWDCA4105	217	LWA43	207
LWBLA148068	69	4	207
LWBLA148078	217	LWA45	208
LWBLA244890	861	0	
LWBLA245804	217	LWA38	
LWBLA247829	863	1	
LWBLA229183	217	LWA28	
LWDCA46491	865	8	
LWDCA47504	217	LWA50	
LWDCA427818A	87	0	
L WD CA 42 74 28	217	LWA35	
L WD CA 32 35 50	879	8	
L WD CA 32 35 63	217		
L WD CA 32 35 75	971		
LWDCA431010A	217		
LWDCA431020J	971		
LWDCA431030D	217		
LWA300F	983		
LWA414	218		
LWA310	905		
LWA380	218		
LWA445	925		
LWA382	218		
LWA383	926		
	218		
	926		
	218		
	927		
	218		
	947		
	218		
	948		
	218		
	948		
	218		





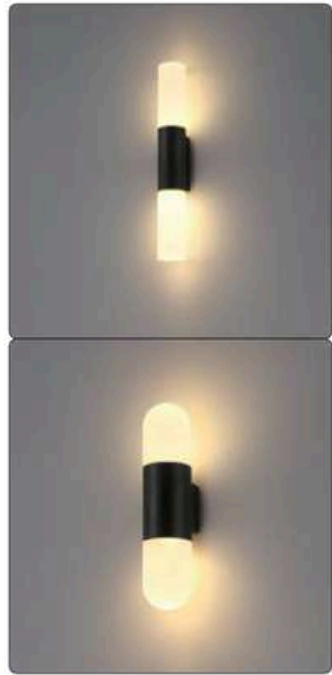

DIMENSION (mm)

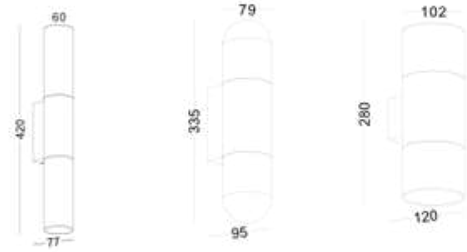

POWER SUPPLY
220-240V DC

LUMEN EFFICACY
72lm/W

CRI (Ra)
90

Information


Color

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 2*6W	<input type="checkbox"/> 3000K		<input type="checkbox"/> On-o
<input type="checkbox"/> Black	<input type="checkbox"/> 2*9W			<input type="checkbox"/> DIM Triac
<input type="checkbox"/> Grey				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee





DIMENSION (mm)

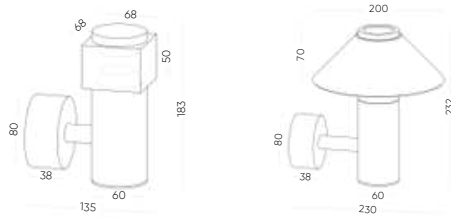

POWER SUPPLY
220-240V DC

LUMEN EFFICACY
83lm/W

CRI (Ra)
90


Information

Color


Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 6W	<input type="checkbox"/> 3000K		<input type="checkbox"/> On-o
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
<input type="checkbox"/> Grey				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee



LWA215 Wall light

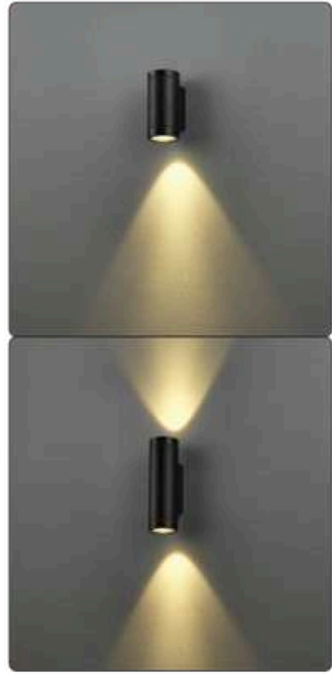

DIMENSION (mm)

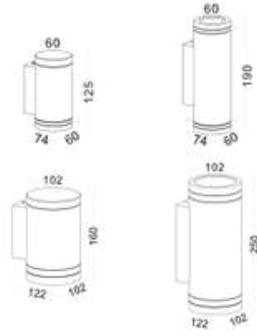

POWER SUPPLY
220-240V DC

LUMEN EFFICACY
75lm/W

CRI (Ra)
90

Information


Color

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 6W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 38°	<input type="checkbox"/> On-o
<input type="checkbox"/> Black	<input type="checkbox"/> 2*6W			<input type="checkbox"/> DIM Triac
<input type="checkbox"/> Grey	<input type="checkbox"/> 12W			<input type="checkbox"/> DIM Bluetooth
	<input type="checkbox"/> 2*12W			<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee





DIMENSION (mm)

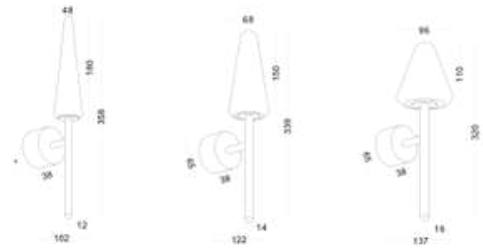

POWER SUPPLY
220-240V DC


LUMEN EFFICACY
40lm/W


CRI (Ra)
90

Information


Color

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 3W	<input type="checkbox"/> 3000K		<input type="checkbox"/> On-o
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
<input type="checkbox"/> Grey				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

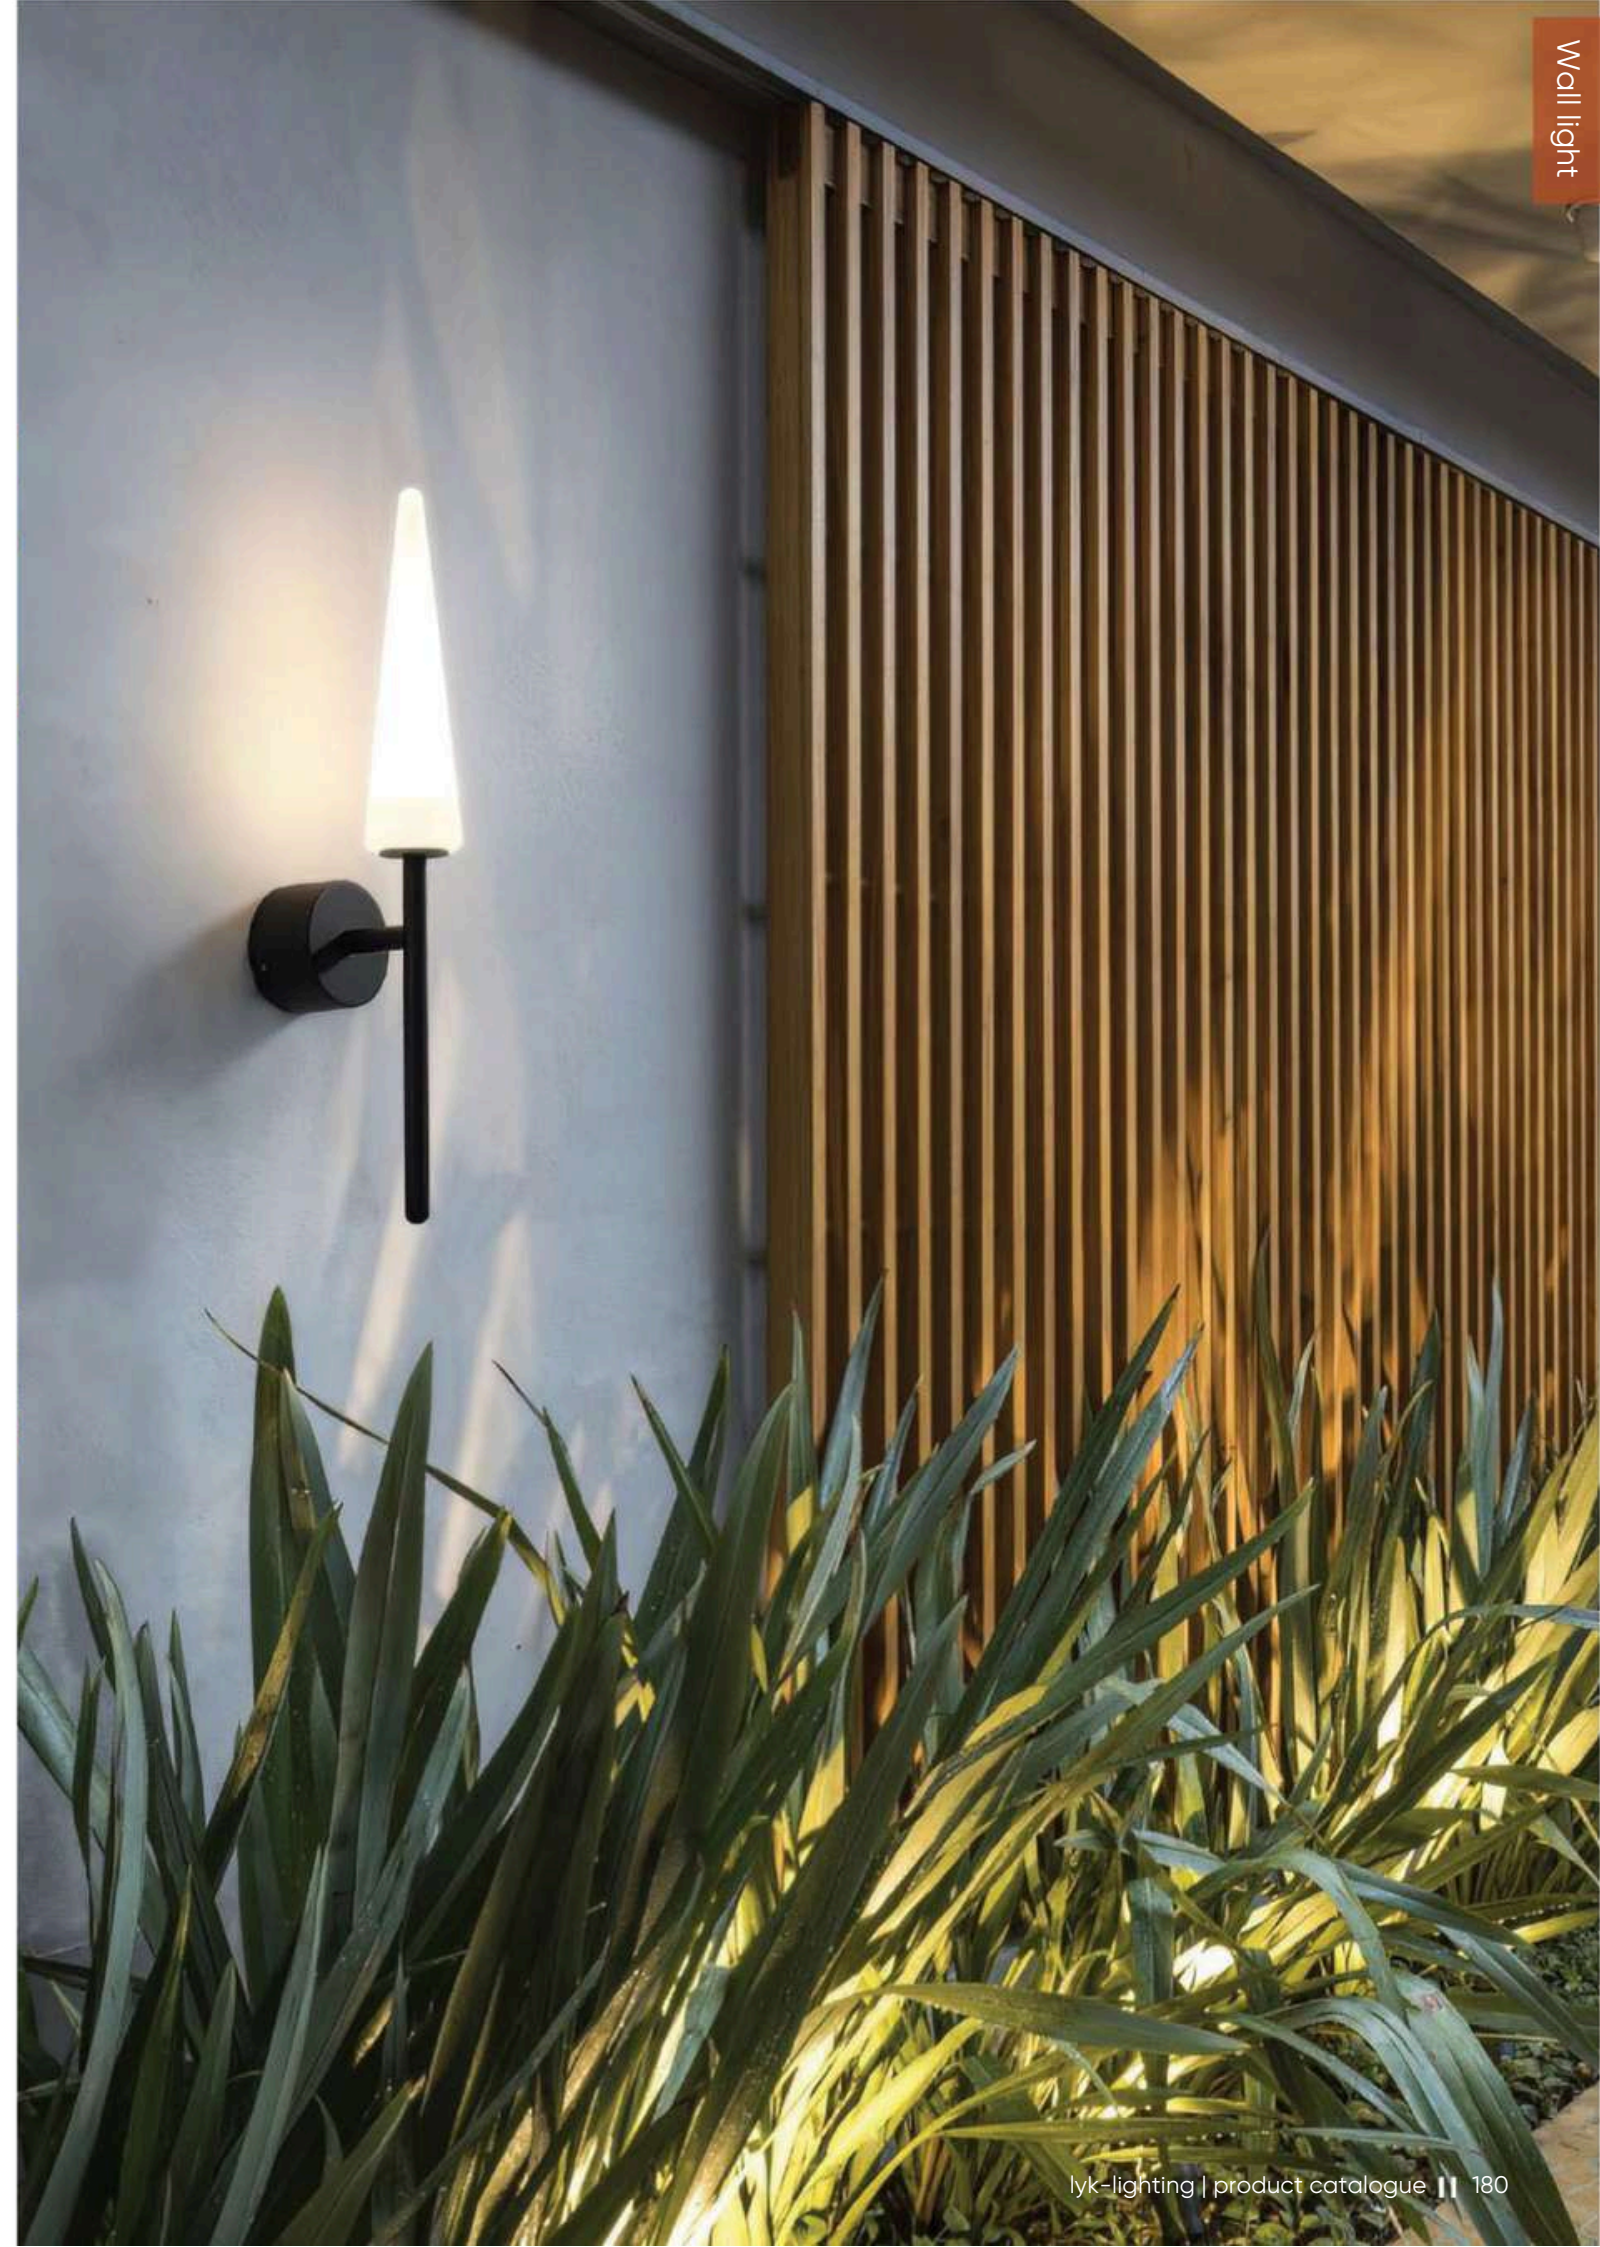

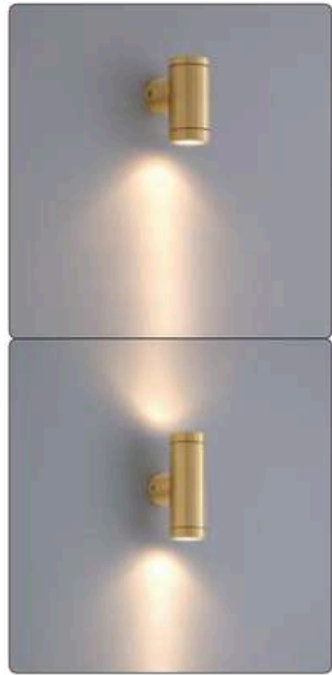

DIMENSION (mm)

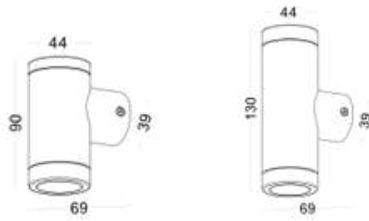

POWER SUPPLY
220-240V DC

LUMEN EFFICACY
40lm/W


CRI (Ra)
90

Information


Color

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> Gold	<input type="checkbox"/> 3W <input type="checkbox"/> 2*3W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 20°	<input type="checkbox"/> On-o <input type="checkbox"/> DIM Triac <input type="checkbox"/> DIM Bluetooth <input type="checkbox"/> DIM DALI <input type="checkbox"/> DIM Zigbee



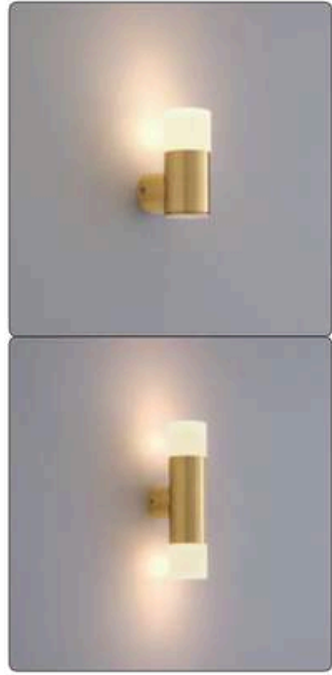

DIMENSION (mm)

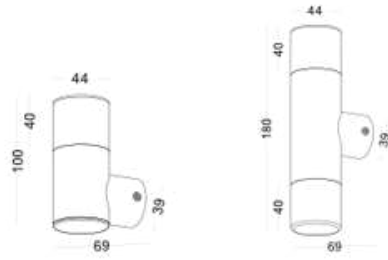

POWER SUPPLY
220-240V DC


LUMEN EFFICACY
100lm/W

CRI (Ra)
90

Information


Color

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> Gold	<input type="checkbox"/> 3W <input type="checkbox"/> 2*3W	<input type="checkbox"/> 3000K		<input type="checkbox"/> On-o <input type="checkbox"/> DIM Triac <input type="checkbox"/> DIM Bluetooth <input type="checkbox"/> DIM DALI <input type="checkbox"/> DIM Zigbee

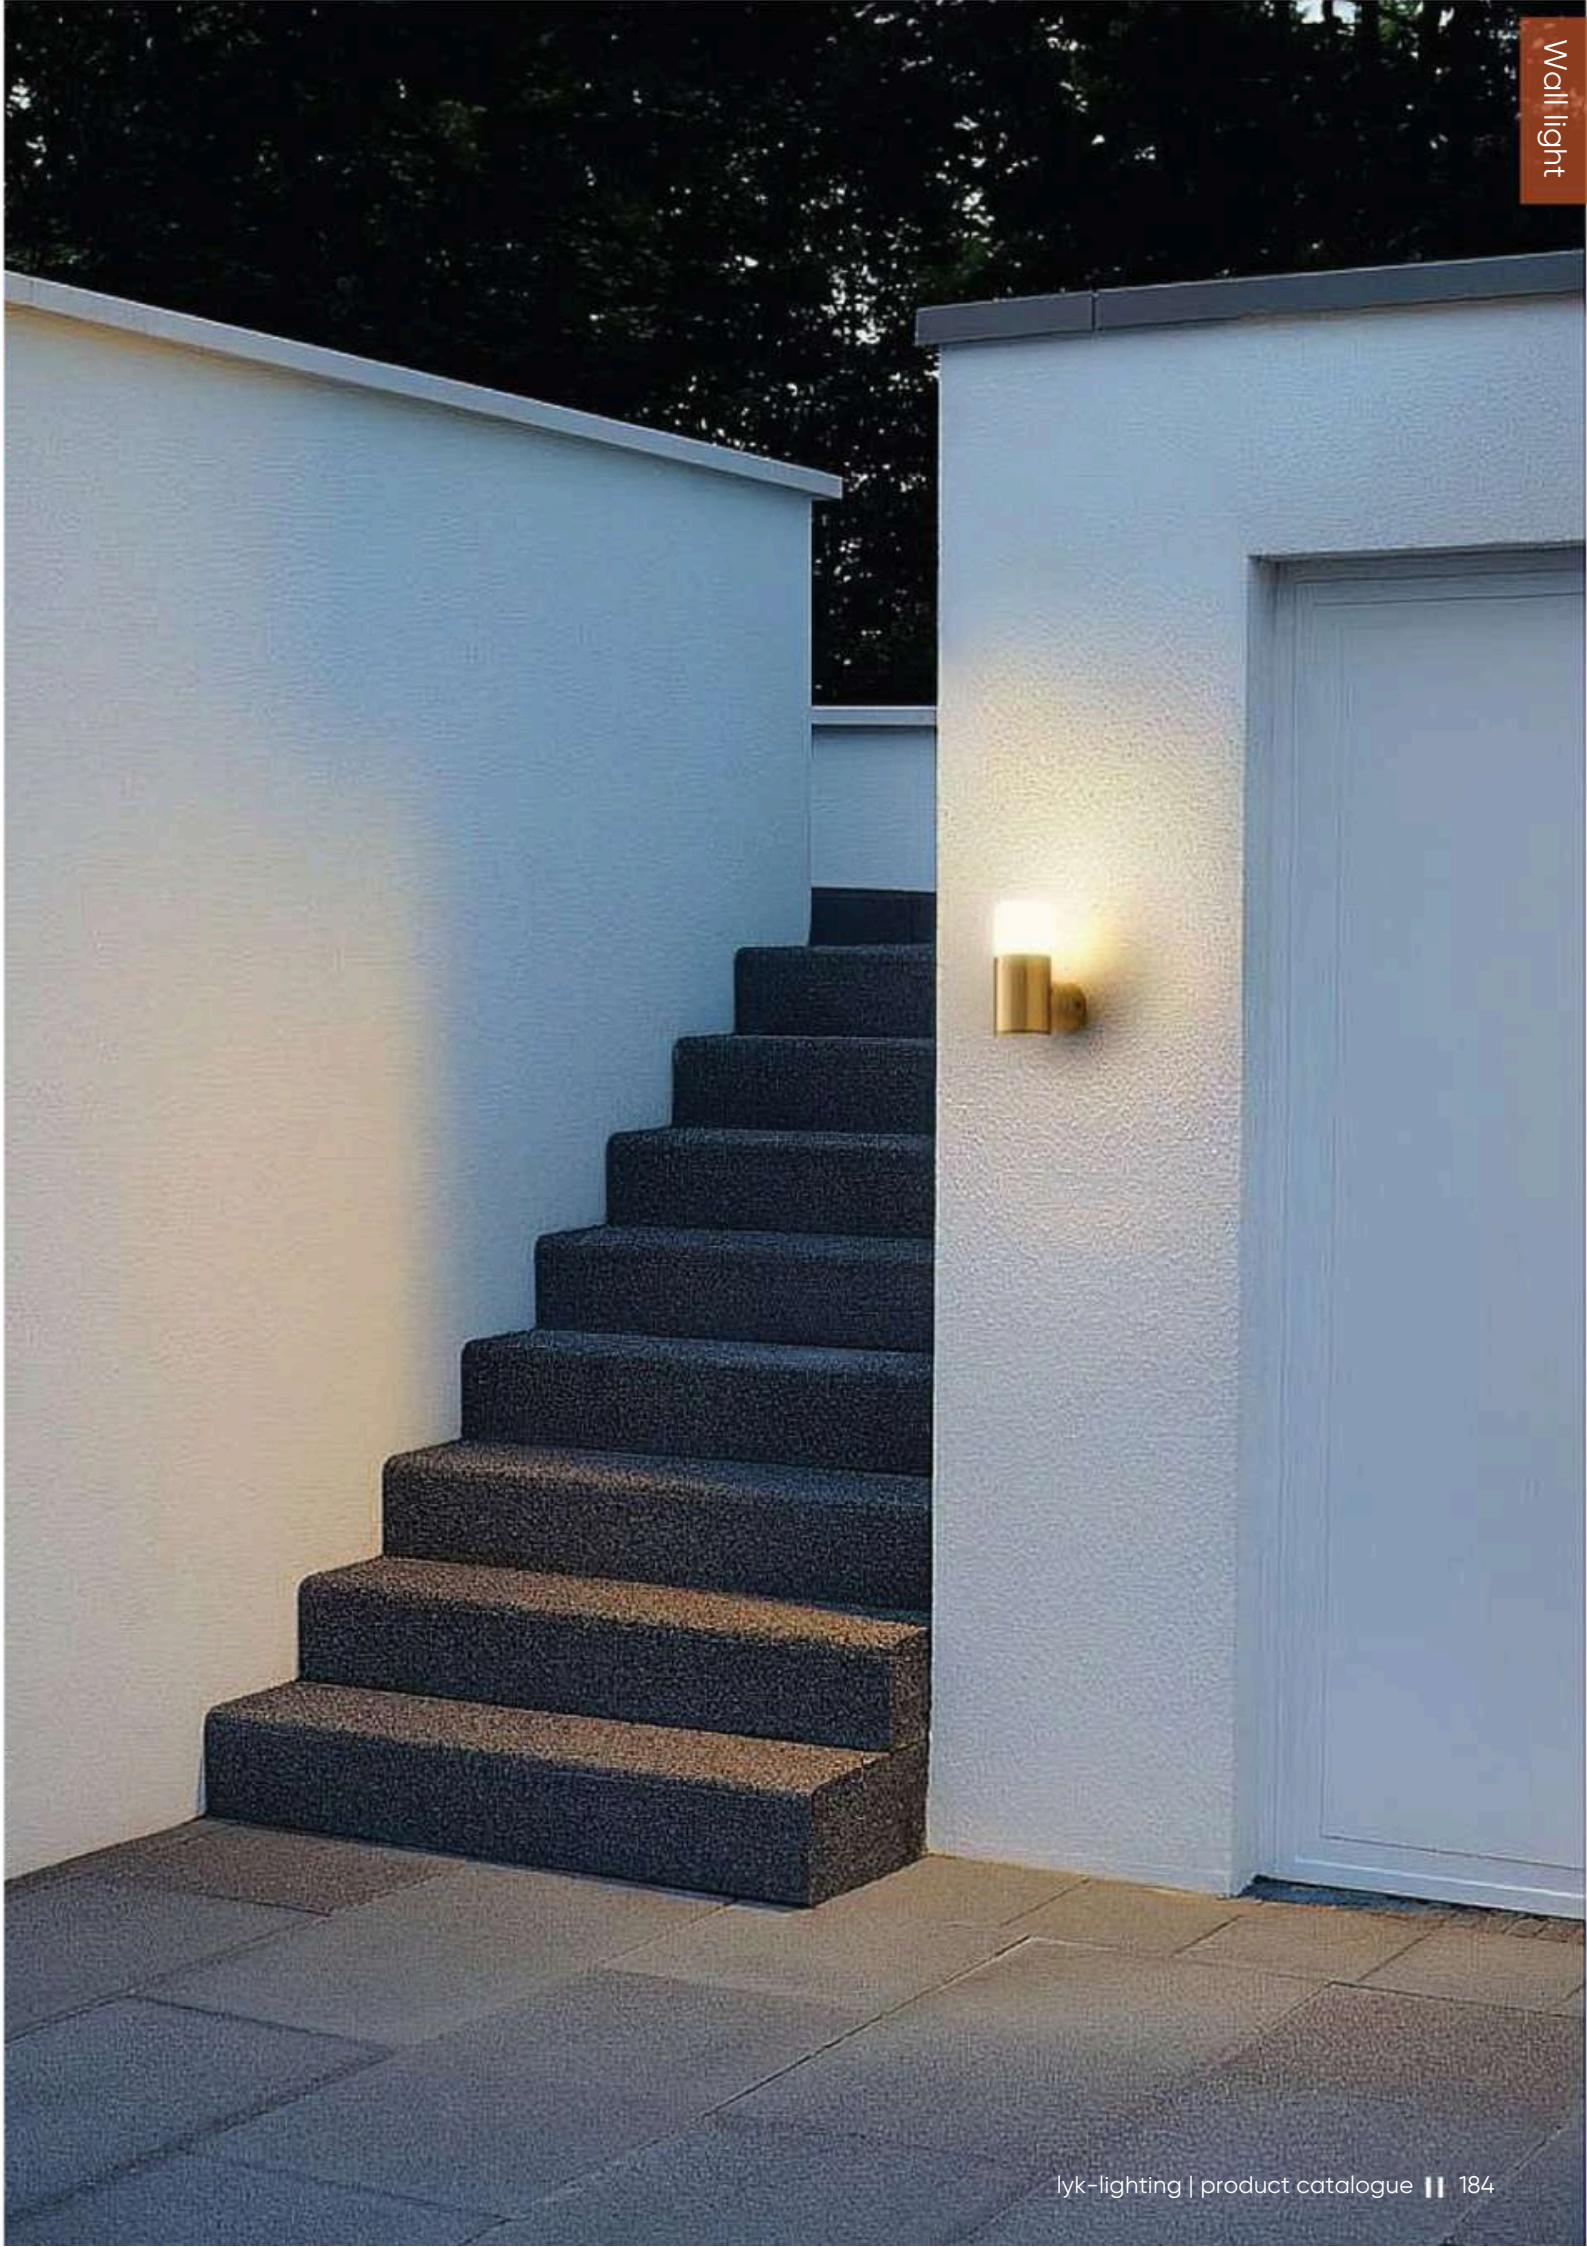



DIMENSION (mm)



POWER SUPPLY
220-240V DC

LUMEN EFFICACY
100lm/W


CRI (Ra)
90

Information


Color

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 3W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 8°	<input type="checkbox"/> On-o
<input type="checkbox"/> Black	<input type="checkbox"/> 2*3W			<input type="checkbox"/> DIM Triac
	<input type="checkbox"/> 4*3W			<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee



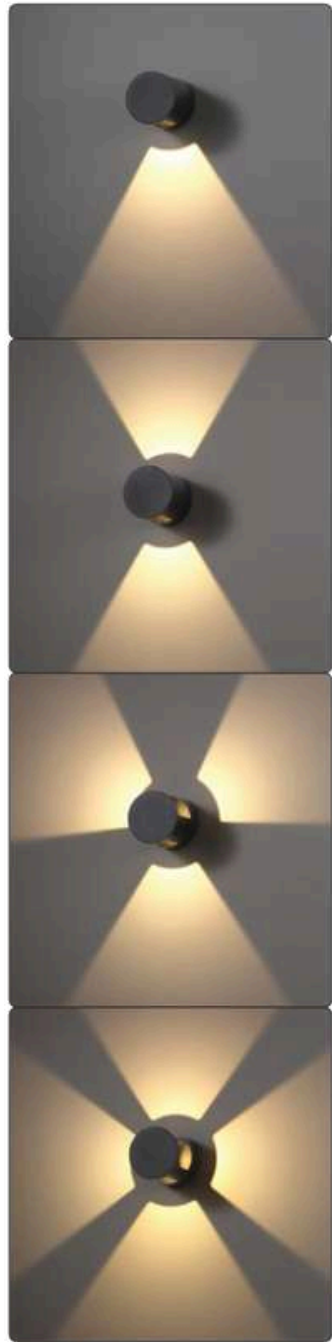

DIMENSION (mm)

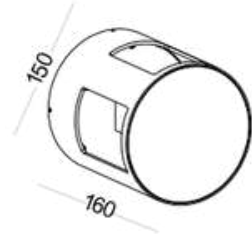

POWER SUPPLY
220-240V DC

LUMEN EFFICACY
100lm/W


CRI (Ra)
90

Information

Color

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 3W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 60°	<input type="checkbox"/> On-o
<input type="checkbox"/> Black	<input type="checkbox"/> 2*3W			<input type="checkbox"/> DIM Triac
	<input type="checkbox"/> 4*3W			<input type="checkbox"/> DIM Bluetooth
	<input type="checkbox"/> 4*3W			<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee



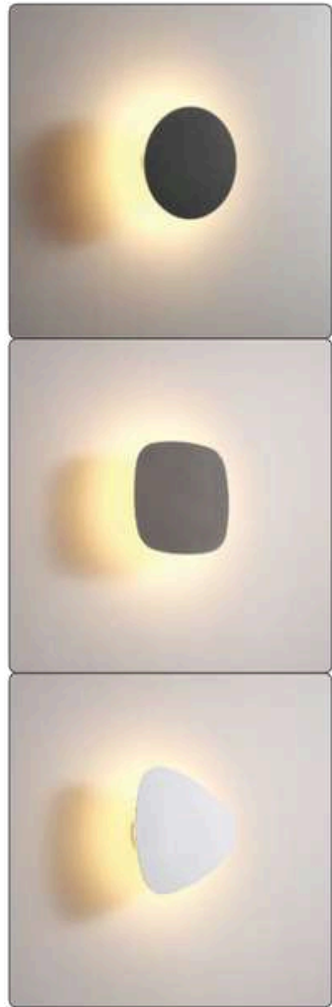

DIMENSION (mm)



POWER SUPPLY
220-240V DC

LUMEN EFFICACY
100lm/W

CRI (Ra)
90

Information

Color


Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 6W	<input type="checkbox"/> 3000K		<input type="checkbox"/> On-o
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
<input type="checkbox"/> Grey				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee



LWA480 | Wall light



DIMENSION (mm)



POWER SUPPLY
220-240V DC


LUMEN EFFICACY
100lm/W

CRI (Ra)
80

Information

Color	Power	CCT	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 6W	<input type="checkbox"/> 3000K	<input type="checkbox"/> On-o
<input type="checkbox"/> Black			<input type="checkbox"/> DIM Triac
<input type="checkbox"/> Grey			<input type="checkbox"/> DIM Bluetooth
			<input type="checkbox"/> DIM DALI
			<input type="checkbox"/> DIM Zigbee

LWA484 | Wall light

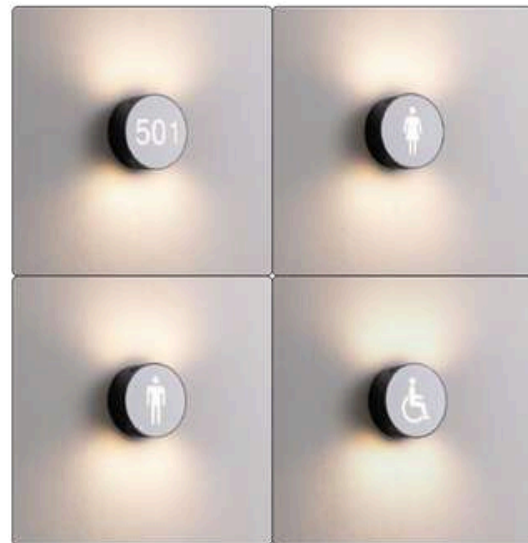

DIMENSION (mm)



POWER SUPPLY
220-240V DC

LUMEN EFFICACY
100lm/W

CRI (Ra)
80

Information


Color	Power	CCT	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 6W	<input type="checkbox"/> 3000K	<input type="checkbox"/> On-o
<input type="checkbox"/> Black			<input type="checkbox"/> DIM Triac
<input type="checkbox"/> Grey			<input type="checkbox"/> DIM Bluetooth
			<input type="checkbox"/> DIM DALI
			<input type="checkbox"/> DIM Zigbee



LWA489 Wall light



DIMENSION (mm)

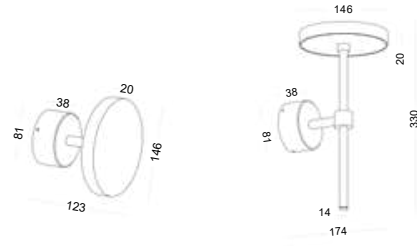

POWER SUPPLY
220-240V DC

LUMEN EFFICACY
100lm/W

CRI (Ra)
80


Information

Color


Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 10W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 38°	<input type="checkbox"/> On-o
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
<input type="checkbox"/> Grey				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee



LWA213 | Wall light

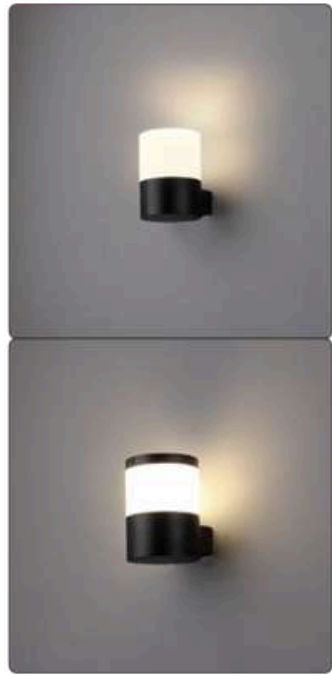

DIMENSION (mm)

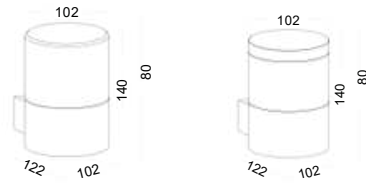

POWER SUPPLY
220-240V DC


LUMEN EFFICACY
89lm/W

CRI (Ra)
>90


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 9W	<input type="checkbox"/> 3000K		<input type="checkbox"/> On-o
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
<input type="checkbox"/> Grey				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

LWA454 | Wall light

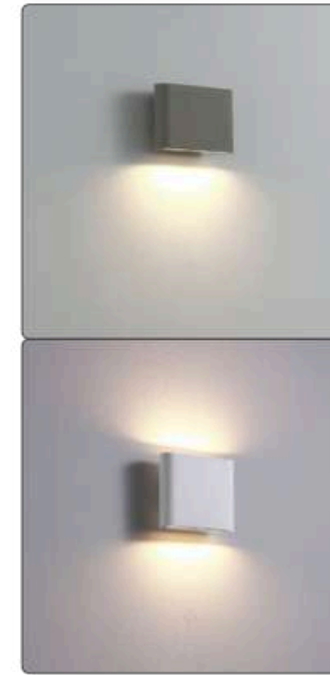

DIMENSION (mm)

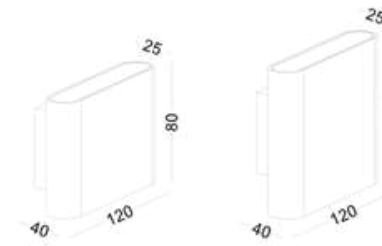

POWER SUPPLY
220-240V DC


LUMEN EFFICACY
100lm/W

CRI (Ra)
>90


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 6W	<input type="checkbox"/> 3000K		<input type="checkbox"/> On-o
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
<input type="checkbox"/> Grey				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

LWA441 | Wall light

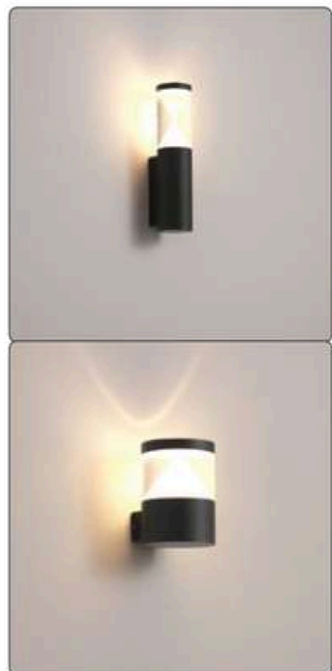

DIMENSION (mm)

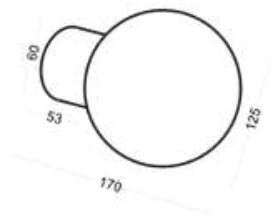

POWER SUPPLY
220-240V DC


LUMEN EFFICACY
89lm/W

CRI (Ra)
>80


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 6W	<input type="checkbox"/> 3000K		<input type="checkbox"/> On-o
<input type="checkbox"/> Black	<input type="checkbox"/> 9W			<input type="checkbox"/> DIM Triac
	<input type="checkbox"/> 20W			<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

LWA288A | Wall light



DIMENSION (mm)



POWER SUPPLY
220-240V DC


LUMEN EFFICACY
100lm/W

CRI (Ra)
>90


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 2*3W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 10-90°	<input type="checkbox"/> On-o
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
<input type="checkbox"/> Grey				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

LWA248 | Wall light

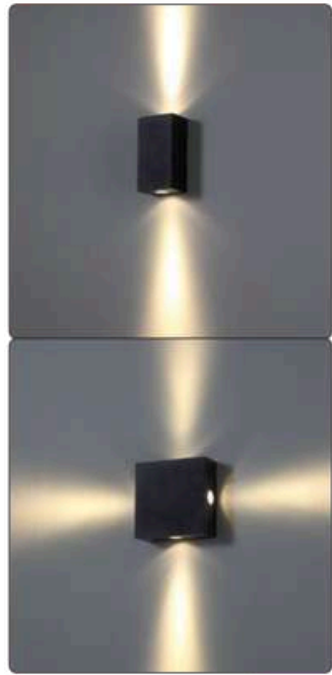

DIMENSION (mm)

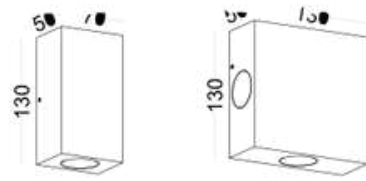

POWER SUPPLY
220-240V DC


LUMEN EFFICACY
40lm/W

CRI (Ra)
>90


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 2*3W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 20°	<input type="checkbox"/> On-o
<input type="checkbox"/> Black	<input type="checkbox"/> 4*3W			<input type="checkbox"/> DIM Triac
<input type="checkbox"/> Grey				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

LWA253 | Wall light

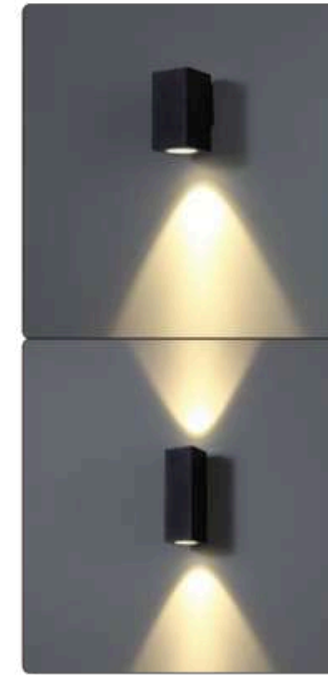

DIMENSION (mm)

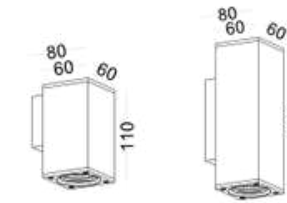

POWER SUPPLY
220-240V DC


LUMEN EFFICACY
72lm/W

CRI (Ra)
>90


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 6W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 38°	<input type="checkbox"/> On-o
<input type="checkbox"/> Black	<input type="checkbox"/> 2*6W			<input type="checkbox"/> DIM Triac
<input type="checkbox"/> Grey				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

LWA250 | Wall light

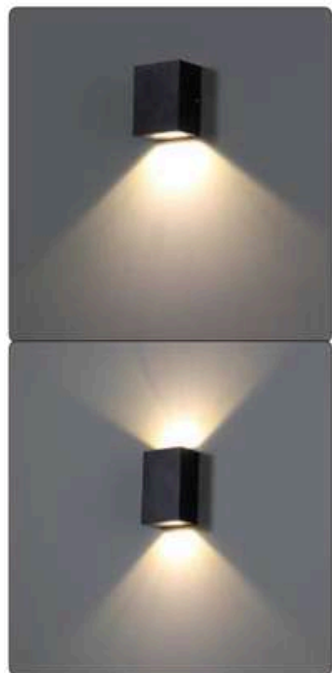

DIMENSION (mm)

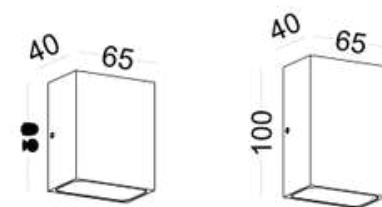

POWER SUPPLY
220-240V DC

LUMEN EFFICACY
70lm/W

CRI (Ra)
>90


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 1W	<input type="checkbox"/> 3000K		<input type="checkbox"/> On-o
<input type="checkbox"/> Black	<input type="checkbox"/> 2*1W			<input type="checkbox"/> DIM Triac
<input type="checkbox"/> Grey				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

LWA255 | Wall light



DIMENSION (mm)

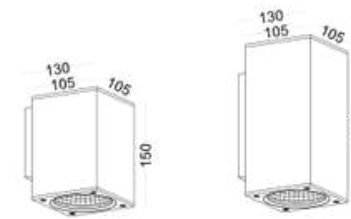

POWER SUPPLY
220-240V DC

LUMEN EFFICACY
75lm/W

CRI (Ra)
>90


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 12W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 38°	<input type="checkbox"/> On-o
<input type="checkbox"/> Black	<input type="checkbox"/> 2*12W			<input type="checkbox"/> DIM Triac
<input type="checkbox"/> Grey				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

LWA300A | Wall light



DIMENSION (mm)



POWER SUPPLY
220-240V DC


LUMEN EFFICACY
100lm/W

CRI (Ra)
>90


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 1*3W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 8°	<input type="checkbox"/> On-o
<input type="checkbox"/> Black	<input type="checkbox"/> 2*3W			<input type="checkbox"/> DIM Triac
<input type="checkbox"/> Grey	<input type="checkbox"/> 3*3W			<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

LWA300D | Wall light

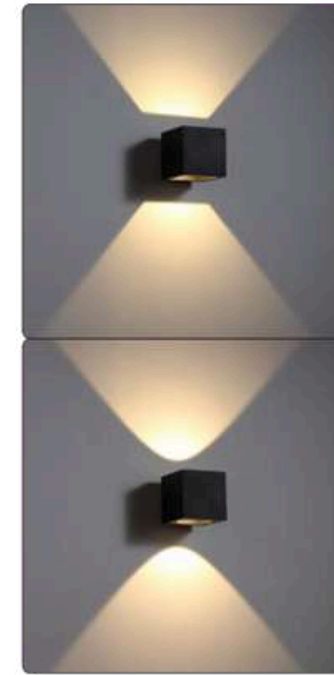

DIMENSION (mm)

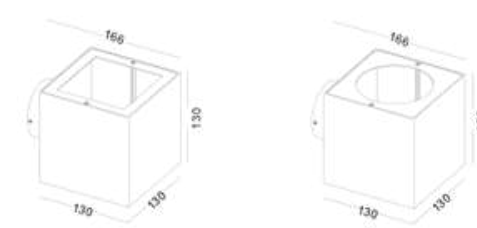

POWER SUPPLY
220-240V DC


LUMEN EFFICACY
83lm/W

CRI (Ra)
>90


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 2*3W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 80°	<input type="checkbox"/> On-o
<input type="checkbox"/> Black			<input type="checkbox"/> 90°	<input type="checkbox"/> DIM Triac
<input type="checkbox"/> Grey				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

LWA300J | Wall light

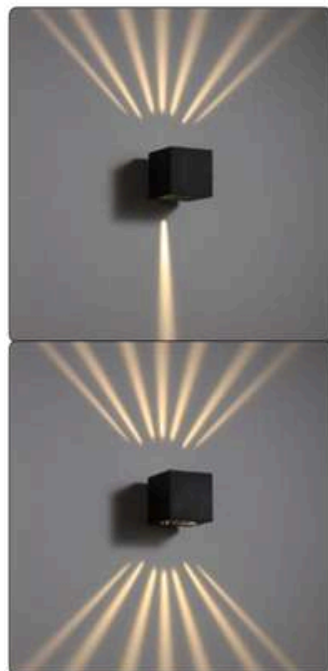

DIMENSION (mm)

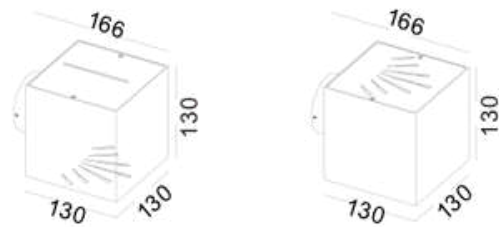

POWER SUPPLY
220-240V DC


LUMEN EFFICACY
83lm/W

CRI (Ra)
>90


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 2*3W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 8°/60°	<input type="checkbox"/> On-o
<input type="checkbox"/> Black			<input type="checkbox"/> 80	<input type="checkbox"/> DIM Triac
<input type="checkbox"/> Grey				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

LWA300F | Wall light

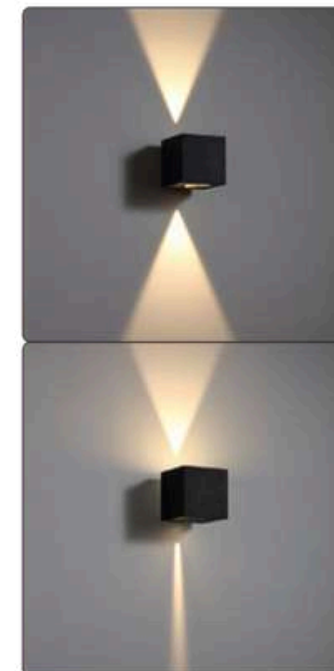

DIMENSION (mm)

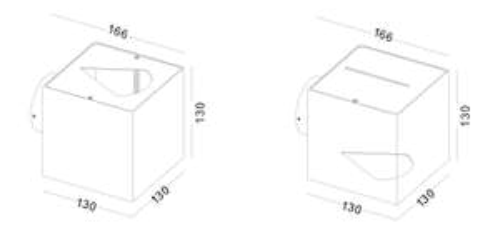

POWER SUPPLY
220-240V DC


LUMEN EFFICACY
83lm/W

CRI (Ra)
>90


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 2*3W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 60°	<input type="checkbox"/> On-o
<input type="checkbox"/> Black			<input type="checkbox"/> 80/60°	<input type="checkbox"/> DIM Triac
<input type="checkbox"/> Grey				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

LWA414 | Wall light

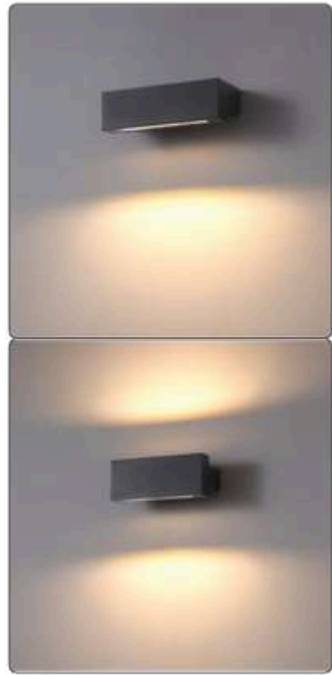

DIMENSION (mm)

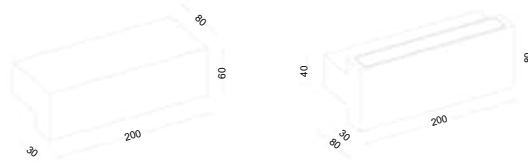

POWER SUPPLY
220-240V DC

LUMEN EFFICACY
100lm/W

CRI (Ra)
>90


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 9W	<input type="checkbox"/> 3000K		<input type="checkbox"/> On-o
<input type="checkbox"/> Black	<input type="checkbox"/> 2*9W			<input type="checkbox"/> DIM Triac
<input type="checkbox"/> Grey				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

LWA380 | Wall light



DIMENSION (mm)



POWER SUPPLY
220-240V DC

LUMEN EFFICACY
100lm/W

CRI (Ra)
>90


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> Black	<input type="checkbox"/> 6W	<input type="checkbox"/> 3000K		<input type="checkbox"/> On-o
				<input type="checkbox"/> DIM Triac
				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

LWA310 | Wall light



DIMENSION (mm)

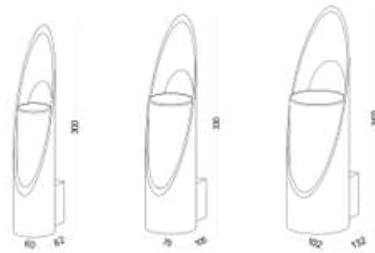

POWER SUPPLY
220-240V DC

LUMEN EFFICACY
86lm/W

CRI (Ra)
>90


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 5W	<input type="checkbox"/> 3000K		<input type="checkbox"/> On-o
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
<input type="checkbox"/> Grey				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

LWA445 | Wall light



DIMENSION (mm)

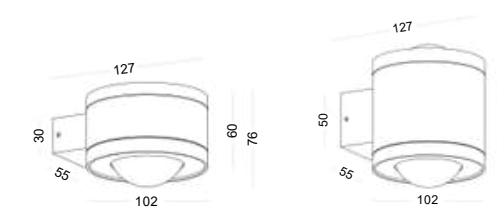

POWER SUPPLY
220-240V DC

LUMEN EFFICACY
67lm/W

CRI (Ra)
>90


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 3W	<input type="checkbox"/> 3000K		<input type="checkbox"/> On-o
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
<input type="checkbox"/> Grey				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

LWA382 Wall light



DIMENSION (mm)




POWER SUPPLY
220-240V DC

LUMEN EFFICACY
100lm/W

CRI (Ra)
90

Information


Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 4W	<input type="checkbox"/> 3000K		<input type="checkbox"/> On-o
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
<input type="checkbox"/> Grey				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

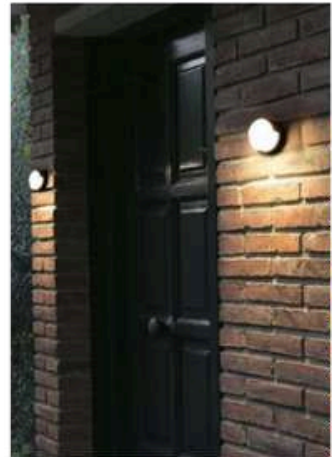

LWA384 Wall light



DIMENSION (mm)

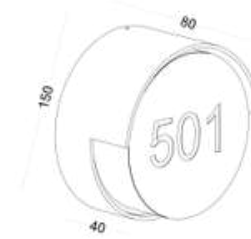

POWER SUPPLY
220-240V DC

LUMEN EFFICACY
100lm/W


CRI (Ra)
90

Information


Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 6W	<input type="checkbox"/> 3000K		<input type="checkbox"/> On-o
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
<input type="checkbox"/> Grey				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee



LWA383 Wall light



DIMENSION (mm)




POWER SUPPLY
220-240V DC

LUMEN EFFICACY
100lm/W

CRI (Ra)
90

Information


Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 6W	<input type="checkbox"/> 3000K		<input type="checkbox"/> On-o
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
<input type="checkbox"/> Grey				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

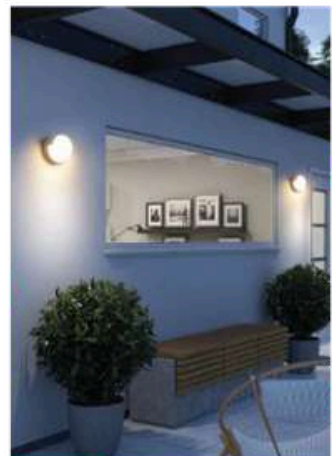

LWA385 Wall light



DIMENSION (mm)

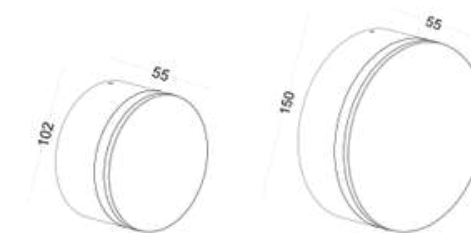


POWER SUPPLY
220-240V DC

LUMEN EFFICACY
100lm/W

CRI (Ra)
90

Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 4W	<input type="checkbox"/> 3000K		<input type="checkbox"/> On-o
<input type="checkbox"/> Black	<input type="checkbox"/> 12W			<input type="checkbox"/> DIM Triac
<input type="checkbox"/> Grey				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

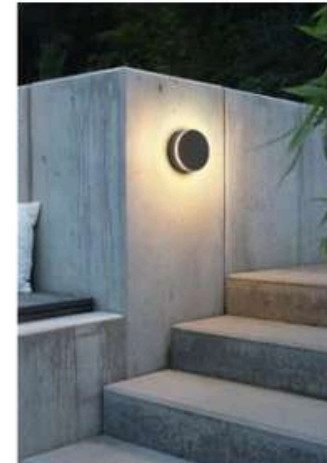

LWA453 | Wall light



DIMENSION (mm)



POWER SUPPLY
220-240V DC

LUMEN EFFICACY
86lm/W

CRI (Ra)
90

Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 10W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 20°	<input type="checkbox"/> On-o
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee



LWA450 | Wall light



DIMENSION (mm)



POWER SUPPLY
220-240V DC

LUMEN EFFICACY
100lm/W

CRI (Ra)
90

Information


Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 3W	<input type="checkbox"/> 3000K		<input type="checkbox"/> On-o
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
<input type="checkbox"/> Grey				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee



LWA434 | Wall light



DIMENSION (mm)

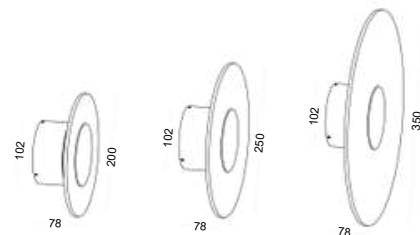

POWER SUPPLY
220-240V DC

LUMEN EFFICACY
100lm/W

CRI (Ra)
90

Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 6W	<input type="checkbox"/> 3000K		<input type="checkbox"/> On-o
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee



LWA381 | Wall light



DIMENSION (mm)




POWER SUPPLY
220-240V DC

LUMEN EFFICACY
90lm/W

CRI (Ra)
90

Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 3W	<input type="checkbox"/> 3000K		<input type="checkbox"/> On-o
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
<input type="checkbox"/> Grey				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

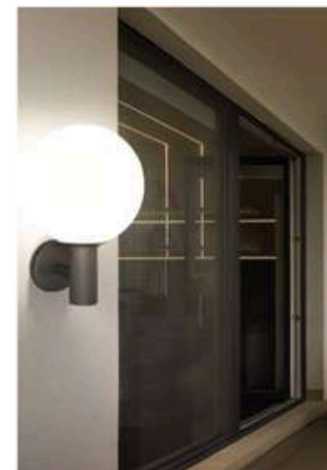

LWA288 | Wall light



DIMENSION (mm)



POWER SUPPLY
220-240V DC

LUMEN EFFICACY
100lm/W

CRI (Ra)
90

Information


Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 2*3W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 10-90°	<input type="checkbox"/> On-o
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
<input type="checkbox"/> Grey				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee



LWA358 | Wall light



DIMENSION (mm)



POWER SUPPLY
220-240V DC

LUMEN EFFICACY
100lm/W

CRI (Ra)
90

Information


Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 10W	<input type="checkbox"/> 3000K		<input type="checkbox"/> On-o
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee



LWA500 | Wall light



DIMENSION (mm)

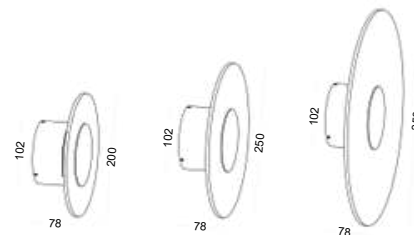

POWER SUPPLY
220-240V DC

LUMEN EFFICACY
83lm/W

CRI (Ra)
90

Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 6W	<input type="checkbox"/> 3000K		<input type="checkbox"/> On-o
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee




STEP LIGHT

ODL007	213	ODL701	358
ODL025	213	ODL702	358
ODL041	214	ODL703	358
ODL043	214	ODL704	358
ODL052	215	ODL705	359
ODL053	215		
ODL054	216		
ODL055	216		
ODL056	217		
ODL057	217		
ODL058	218		
ODL059	218		
ODL060	219		
ODL061	219		
ODL062	220		
ODL063	220		
ODL064	221		
ODL065	221		
ODL701	222		
ODL702	222		
ODL703	223		
ODL704	223		
ODL705	224		





ODL007 | Step light

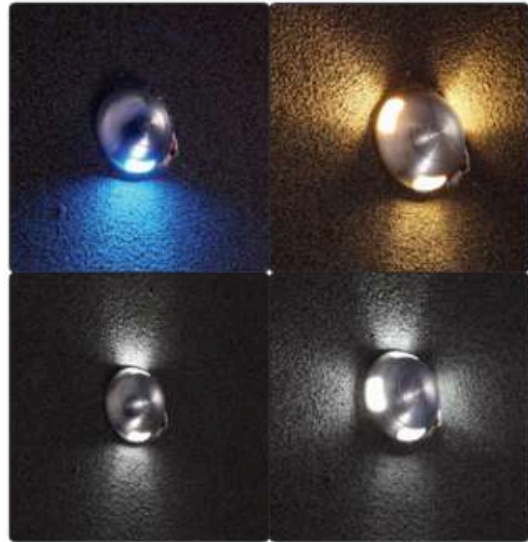

DIMENSION (mm)



POWER SUPPLY
220-240V DC


LUMEN EFFICACY
40lm/W

CRI (Ra)
>90


Information

Color	Power	CCT	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 3W	<input type="checkbox"/> RGB	<input type="checkbox"/> On-o
<input type="checkbox"/> Black			<input type="checkbox"/> DIM Triac
<input type="checkbox"/> Silver			<input type="checkbox"/> DIM Bluetooth
<input type="checkbox"/> Grey			<input type="checkbox"/> DIM DALI
			<input type="checkbox"/> DIM Zigbee

ODL041 | Step light



DIMENSION (mm)




POWER SUPPLY
220-240V DC

LUMEN EFFICACY
70lm/W

CRI (Ra)
>90

Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 1W	<input type="checkbox"/> 3000K		<input type="checkbox"/> On-o
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
<input type="checkbox"/> Grey				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

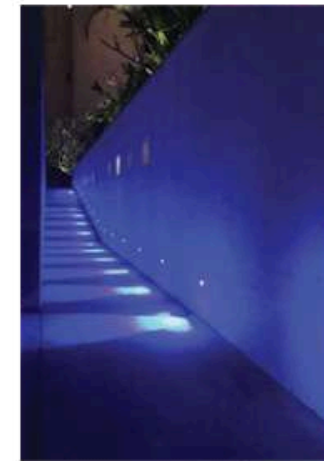

ODL025 | Step light



DIMENSION (mm)




POWER SUPPLY
220-240V DC

LUMEN EFFICACY
40lm/W

CRI (Ra)
>90

Information


Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 3W	<input type="checkbox"/> RGB		<input type="checkbox"/> On-o
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
<input type="checkbox"/> Silver				<input type="checkbox"/> DIM Bluetooth
<input type="checkbox"/> Grey				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

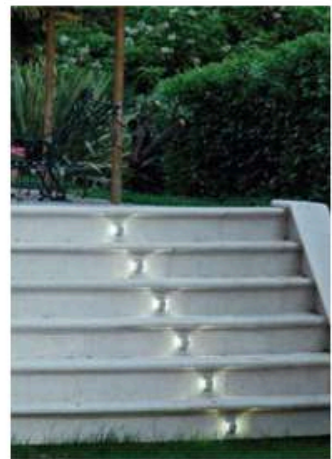

ODL043 | Step light



DIMENSION (mm)



POWER SUPPLY
220-240V DC

LUMEN EFFICACY
70lm/W

CRI (Ra)
>90


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 1W	<input type="checkbox"/> RGB		<input type="checkbox"/> On-o
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
<input type="checkbox"/> Grey				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

ODL052 | Step light



DIMENSION (mm)




POWER SUPPLY
220-240V DC

LUMEN EFFICACY
80lm/W


CRI (Ra)
>90

Information


Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 3W	<input type="checkbox"/> 3000K		<input type="checkbox"/> On-o
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

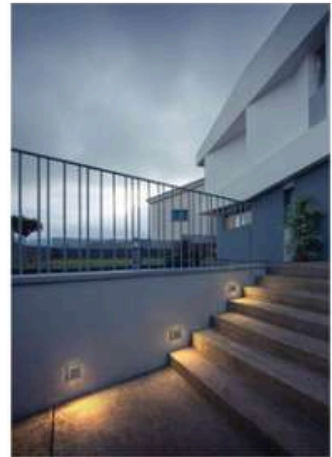

ODL054 | Step light



DIMENSION (mm)

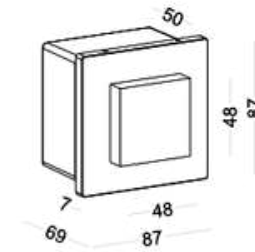

POWER SUPPLY
220-240V DC

LUMEN EFFICACY
100lm/W


CRI (Ra)
>90

Information


Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 3W	<input type="checkbox"/> 3000K		<input type="checkbox"/> On-o
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee



ODL053 | Step light



DIMENSION (mm)



POWER SUPPLY
220-240V DC


LUMEN EFFICACY
80lm/W

CRI (Ra)
>90


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 3W	<input type="checkbox"/> 3000K		<input type="checkbox"/> On-o
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

ODL055 | Step light



DIMENSION (mm)



POWER SUPPLY
220-240V DC

LUMEN EFFICACY
100lm/W

CRI (Ra)
>90


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 3W	<input type="checkbox"/> 3000K		<input type="checkbox"/> On-o
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

ODL056 | Step light



DIMENSION (mm)




POWER SUPPLY
220-240V DC

LUMEN EFFICACY
100lm/W

CRI (Ra)
>90

Information


Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 3W	<input type="checkbox"/> 3000K		<input type="checkbox"/> On-o
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

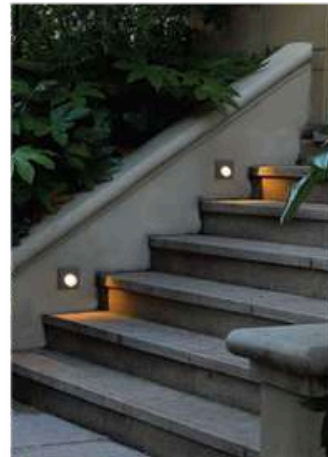

ODL057 | Step light



DIMENSION (mm)



POWER SUPPLY
220-240V DC


LUMEN EFFICACY
100lm/W

CRI (Ra)
>90


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 3W	<input type="checkbox"/> 3000K		<input type="checkbox"/> On-o
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

ODL058 | Step light



DIMENSION (mm)



POWER SUPPLY
220-240V DC

LUMEN EFFICACY
40lm/W


CRI (Ra)
>90

Information


Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 3W	<input type="checkbox"/> 3000K		<input type="checkbox"/> On-o
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee



ODL059 | Step light



DIMENSION (mm)



POWER SUPPLY
220-240V DC

LUMEN EFFICACY
40lm/W

CRI (Ra)
>90


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 3W	<input type="checkbox"/> 3000K		<input type="checkbox"/> On-o
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

ODL060 | Step light



DIMENSION (mm)



POWER SUPPLY
220-240V DC

LUMEN EFFICACY
100lm/W

CRI (Ra)
>90


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 3W	<input type="checkbox"/> 3000K		<input type="checkbox"/> On-o
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

ODL062 | Step light



DIMENSION (mm)



POWER SUPPLY
220-240V DC

LUMEN EFFICACY
40lm/W

CRI (Ra)
>90


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 3W	<input type="checkbox"/> 3000K		<input type="checkbox"/> On-o
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

ODL061 | Step light



DIMENSION (mm)



POWER SUPPLY
220-240V DC


LUMEN EFFICACY
100lm/W

CRI (Ra)
>90


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 3W	<input type="checkbox"/> 3000K		<input type="checkbox"/> On-o
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

ODL063 | Step light



DIMENSION (mm)



POWER SUPPLY
220-240V DC

LUMEN EFFICACY
40lm/W

CRI (Ra)
>90

Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 3W	<input type="checkbox"/> 3000K		<input type="checkbox"/> On-o
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

ODL064 | Step light



DIMENSION (mm)



POWER SUPPLY
220-240V DC

LUMEN EFFICACY
100lm/W

CRI (Ra)
>90

Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 3W	<input type="checkbox"/> 3000K		<input type="checkbox"/> On-o
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

ODL701 | Step light



DIMENSION (mm)



POWER SUPPLY
220-240V DC

LUMEN EFFICACY
100lm/W

CRI (Ra)
>90


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 3W	<input type="checkbox"/> 3000K		<input type="checkbox"/> On-o
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

ODL065 | Step light



DIMENSION (mm)




POWER SUPPLY
220-240V DC

LUMEN EFFICACY
100lm/W


CRI (Ra)
>90

Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 3W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 30°	<input type="checkbox"/> On-o
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

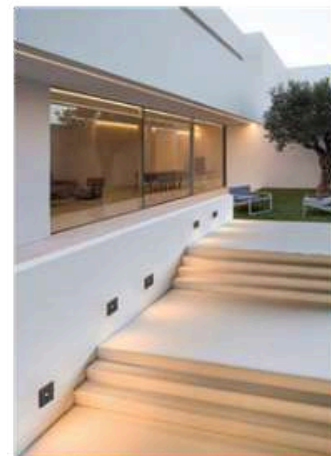

ODL702 | Step light



DIMENSION (mm)



POWER SUPPLY
220-240V DC

LUMEN EFFICACY
100lm/W

CRI (Ra)
>90


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 3W	<input type="checkbox"/> 3000K		<input type="checkbox"/> On-o
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

ODL703 | Step light



DIMENSION (mm)



POWER SUPPLY
220-240V DC

LUMEN EFFICACY
100lm/W

CRI (Ra)
90

Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 3W	<input type="checkbox"/> 3000K		<input type="checkbox"/> On-o
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

ODL705 | Step light



DIMENSION (mm)



POWER SUPPLY
220-240V DC


LUMEN EFFICACY
40lm/W

CRI (Ra)
90


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 3W	<input type="checkbox"/> 3000K		<input type="checkbox"/> On-o
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

ODL704 | Step light



DIMENSION (mm)



POWER SUPPLY
220-240V DC

LUMEN EFFICACY
100lm/W

CRI (Ra)
90

Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 6W	<input type="checkbox"/> 3000K		<input type="checkbox"/> On-o
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

SPOTLIGHT

LFL027-IN220	229
LFL028-IN220	229
LFL036-IN220	230
LSP155	230
LSP183-IN220	231
LSP187-IN220	231
LSP232	232
LSP233	232
VISTA1	233
VISTA2	234
VISTA3	235
VISTA4	236
VISTA5	237






LFL027-IN220 | Spotlight



DIMENSION (mm)



POWER SUPPLY
220-240V DC

LUMEN EFFICACY
83lm/W

CRI (Ra)
90

Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 6W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 38°	<input type="checkbox"/> On-o
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

LFL036-IN220 | Spotlight



DIMENSION (mm)



POWER SUPPLY
220-240V DC

LUMEN EFFICACY
86lm/W

CRI (Ra)
90


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 3W	<input type="checkbox"/> 3000K		<input type="checkbox"/> On-o
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
<input type="checkbox"/> Gold				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

LFL028-IN220 | Spotlight



DIMENSION (mm)



POWER SUPPLY
220-240V DC

LUMEN EFFICACY
83lm/W

CRI (Ra)
90


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 6W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 38°	<input type="checkbox"/> On-o
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

LSP155 | Spotlight



DIMENSION (mm)

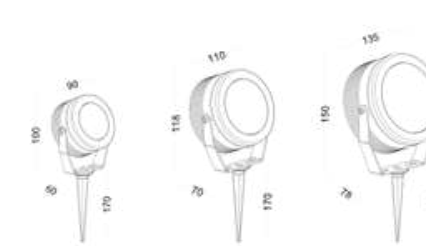

POWER SUPPLY
220-240V DC

LUMEN EFFICACY
83lm/W

CRI (Ra)
90


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 6W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 38°	<input type="checkbox"/> On-o
<input type="checkbox"/> Black	<input type="checkbox"/> 9W			<input type="checkbox"/> DIM Triac
	<input type="checkbox"/> 12W			<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

LSP183-IN220 | Spotlight



DIMENSION (mm)

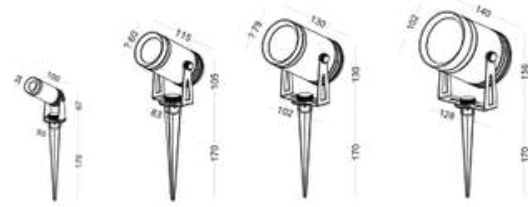

POWER SUPPLY
220-240V DC

LUMEN EFFICACY
75lm/W

CRI (Ra)
90

Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 3W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 24°	<input type="checkbox"/> On-o
<input type="checkbox"/> Black	<input type="checkbox"/> 6W		<input type="checkbox"/> 30°	<input type="checkbox"/> DIM Triac
<input type="checkbox"/> Grey	<input type="checkbox"/> 9W			<input type="checkbox"/> DIM Bluetooth
	<input type="checkbox"/> 12W			<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee



LSP232 | Spotlight



DIMENSION (mm)




POWER SUPPLY
220-240V DC

LUMEN EFFICACY
67lm/W

CRI (Ra)
90

Information


Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 3W	<input type="checkbox"/> 2000K		<input type="checkbox"/> On-o
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

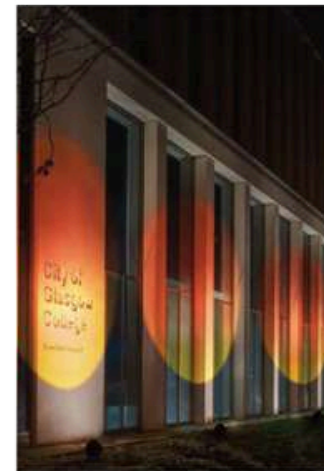

LSP187-IN220 | Spotlight



DIMENSION (mm)

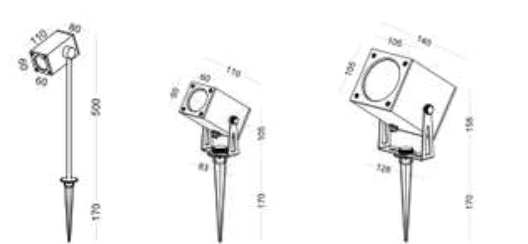


POWER SUPPLY
220-240V DC

LUMEN EFFICACY
75lm/W

CRI (Ra)
90

Information


Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 3W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 38°	<input type="checkbox"/> On-o
<input type="checkbox"/> Black	<input type="checkbox"/> 6W			<input type="checkbox"/> DIM Triac
<input type="checkbox"/> Grey	<input type="checkbox"/> 12W			<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

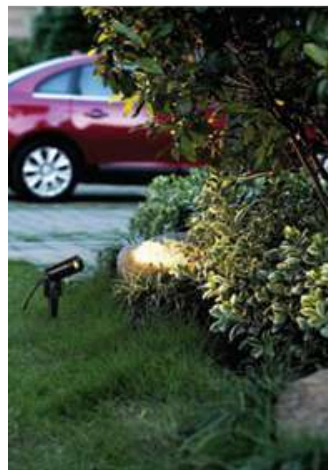

LSP233 | Spotlight



DIMENSION (mm)

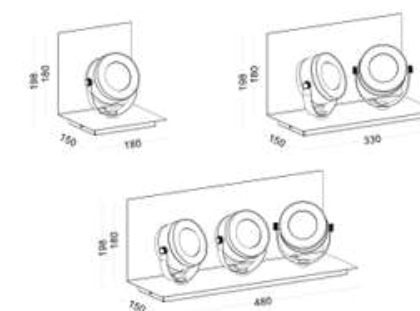

POWER SUPPLY
220-240V DC

LUMEN EFFICACY
67lm/W


CRI (Ra)
90

Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 6W	<input type="checkbox"/> 2000K		<input type="checkbox"/> On-o
<input type="checkbox"/> Black	<input type="checkbox"/> 2*6W			<input type="checkbox"/> DIM Triac
	<input type="checkbox"/> 3*6W			<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee



DIMENSION (mm)



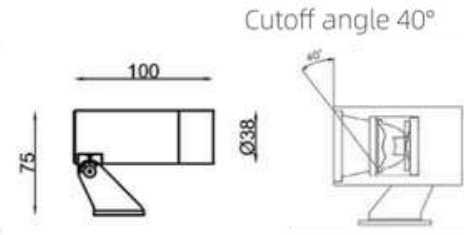


POWER SUPPLY
220-240V DC

LUMEN EFFICACY
40lm/W

CRI (Ra)
90

Light distribution

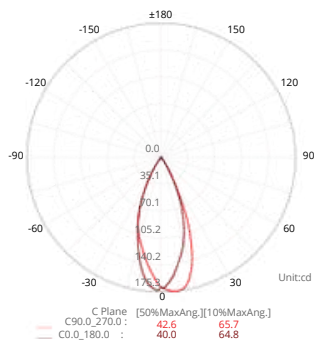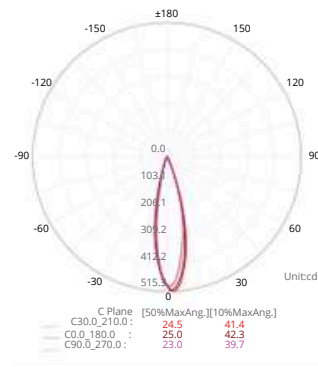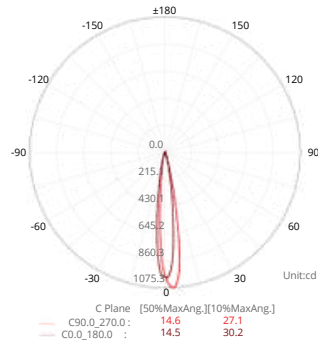

Information

Color

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 2.5W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 14.6°	<input type="checkbox"/> On-o
<input type="checkbox"/> Black		<input type="checkbox"/> 3000K	<input type="checkbox"/> 24.5°	<input type="checkbox"/> DIM Triac
<input type="checkbox"/> Grey		<input type="checkbox"/> 4000K	<input type="checkbox"/> 42.6°	<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee


Accessory



Snoot-A Spike



DIMENSION (mm)




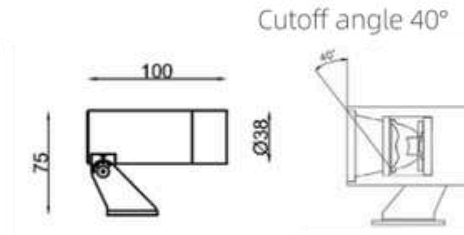


POWER SUPPLY
220-240V DC

LUMEN EFFICACY
71lm/W

CRI (Ra)
90

Light distribution

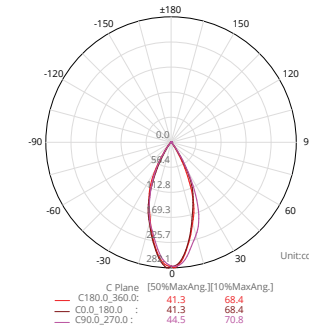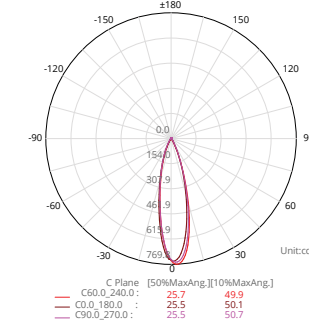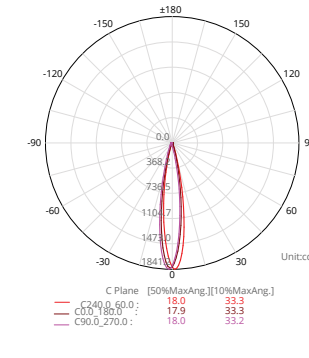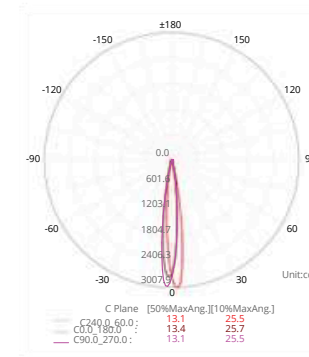


Information

Color

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 5W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 15°	<input type="checkbox"/> On-o
<input type="checkbox"/> Black		<input type="checkbox"/> 3000K	<input type="checkbox"/> 20°	<input type="checkbox"/> DIM Triac
<input type="checkbox"/> Grey		<input type="checkbox"/> 4000K	<input type="checkbox"/> 32°	<input type="checkbox"/> DIM Bluetooth
			<input type="checkbox"/> 56°	<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee


Accessory

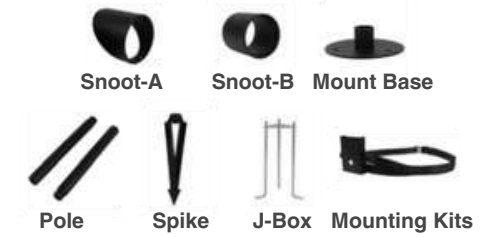

Snoot-A Snoot-B Mount Base Pole Spike J-Box Mounting Kits



DIMENSION (mm)




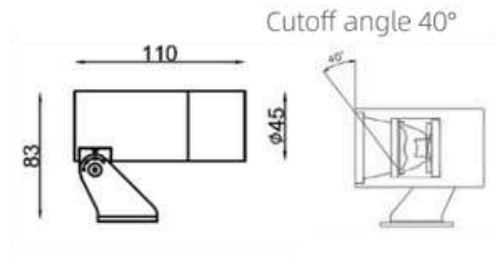


POWER SUPPLY
220-240V DC

LUMEN EFFICACY
90lm/W

CRI (Ra)
90

Light distribution

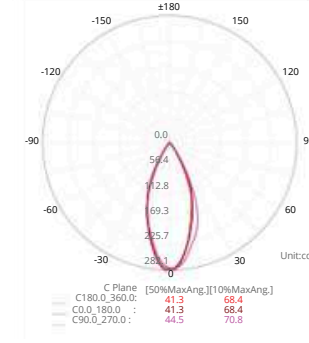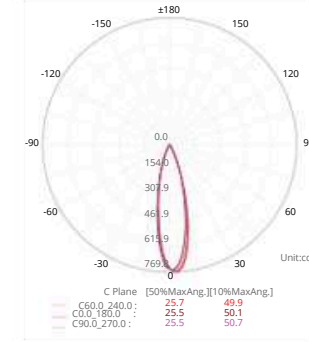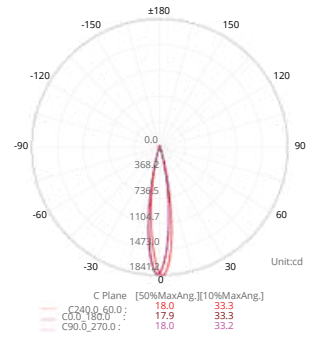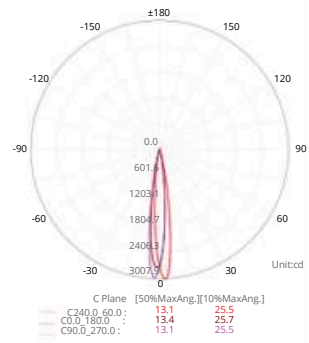


Information


Color

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 4W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 3°	<input type="checkbox"/> On-o
<input type="checkbox"/> Black	<input type="checkbox"/> 8W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 5°	<input type="checkbox"/> DIM Triac
<input type="checkbox"/> Grey		<input type="checkbox"/> 4000K	<input type="checkbox"/> 12°	<input type="checkbox"/> DIM Bluetooth
			<input type="checkbox"/> 24°	<input type="checkbox"/> DIM DALI
			<input type="checkbox"/> 36°	<input type="checkbox"/> DIM Zigbee
			<input type="checkbox"/> 42°	

Accessory

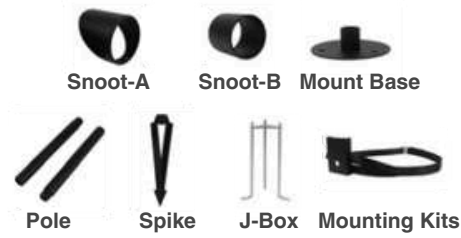

DIMENSION (mm)




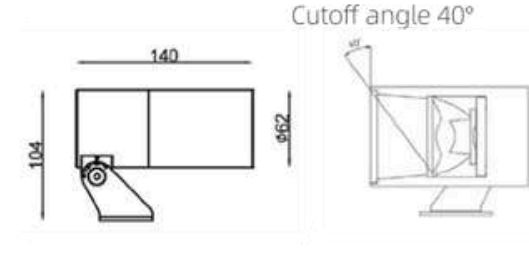


POWER SUPPLY
220-240V DC

LUMEN EFFICACY
54lm/W

CRI (Ra)
90

Light distribution

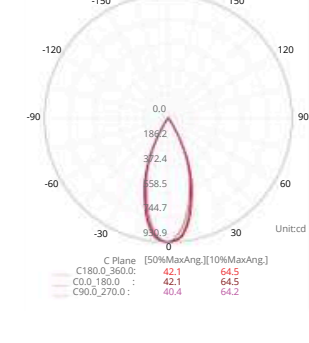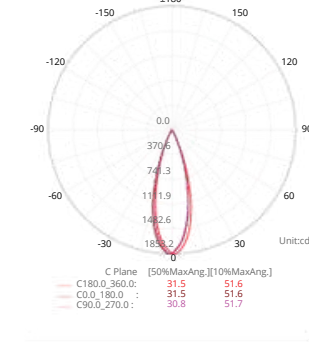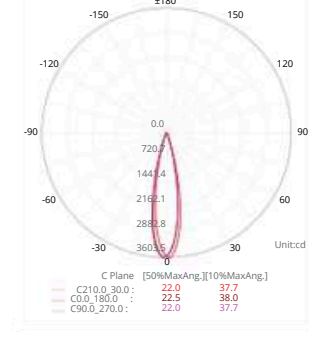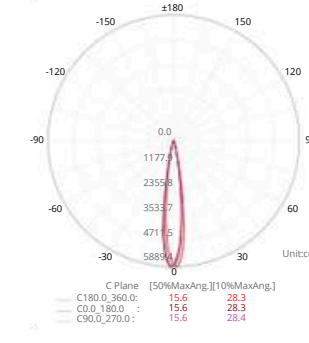


Information

Color


Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 15W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 3°	<input type="checkbox"/> On-o
<input type="checkbox"/> Black		<input type="checkbox"/> 3000K	<input type="checkbox"/> 7°	<input type="checkbox"/> DIM Triac
<input type="checkbox"/> Grey		<input type="checkbox"/> 4000K	<input type="checkbox"/> 12°	<input type="checkbox"/> DIM Bluetooth
			<input type="checkbox"/> 24°	<input type="checkbox"/> DIM DALI
			<input type="checkbox"/> 36°	<input type="checkbox"/> DIM Zigbee
			<input type="checkbox"/> 42°	

Accessory

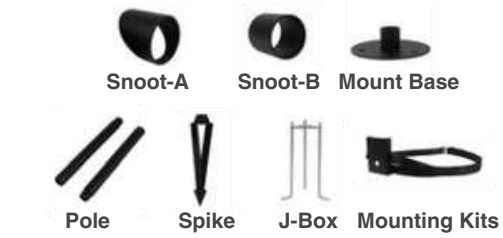



DIMENSION (mm)




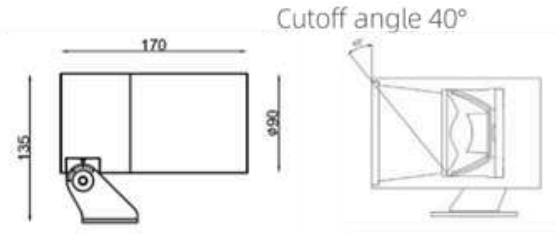


POWER SUPPLY
220-240V DC

LUMEN EFFICACY
47lm/W

CRI (Ra)
90

Light distribution

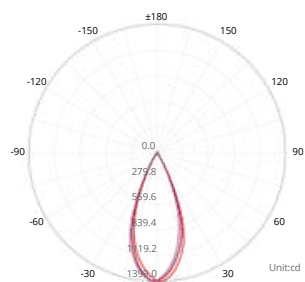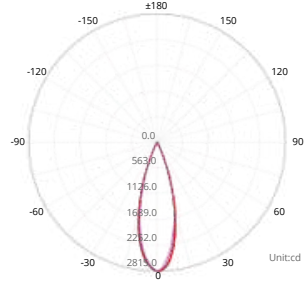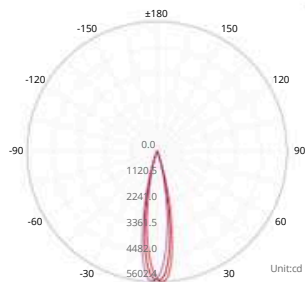
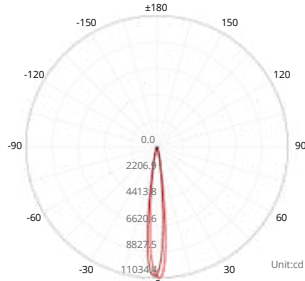


Information

Color

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 25W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 12°	<input type="checkbox"/> On-o
<input type="checkbox"/> Black		<input type="checkbox"/> 3000K	<input type="checkbox"/> 24°	<input type="checkbox"/> DIM Triac
<input type="checkbox"/> Grey		<input type="checkbox"/> 4000K	<input type="checkbox"/> 36°	<input type="checkbox"/> DIM Bluetooth
			<input type="checkbox"/> 42°	<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

Accessory

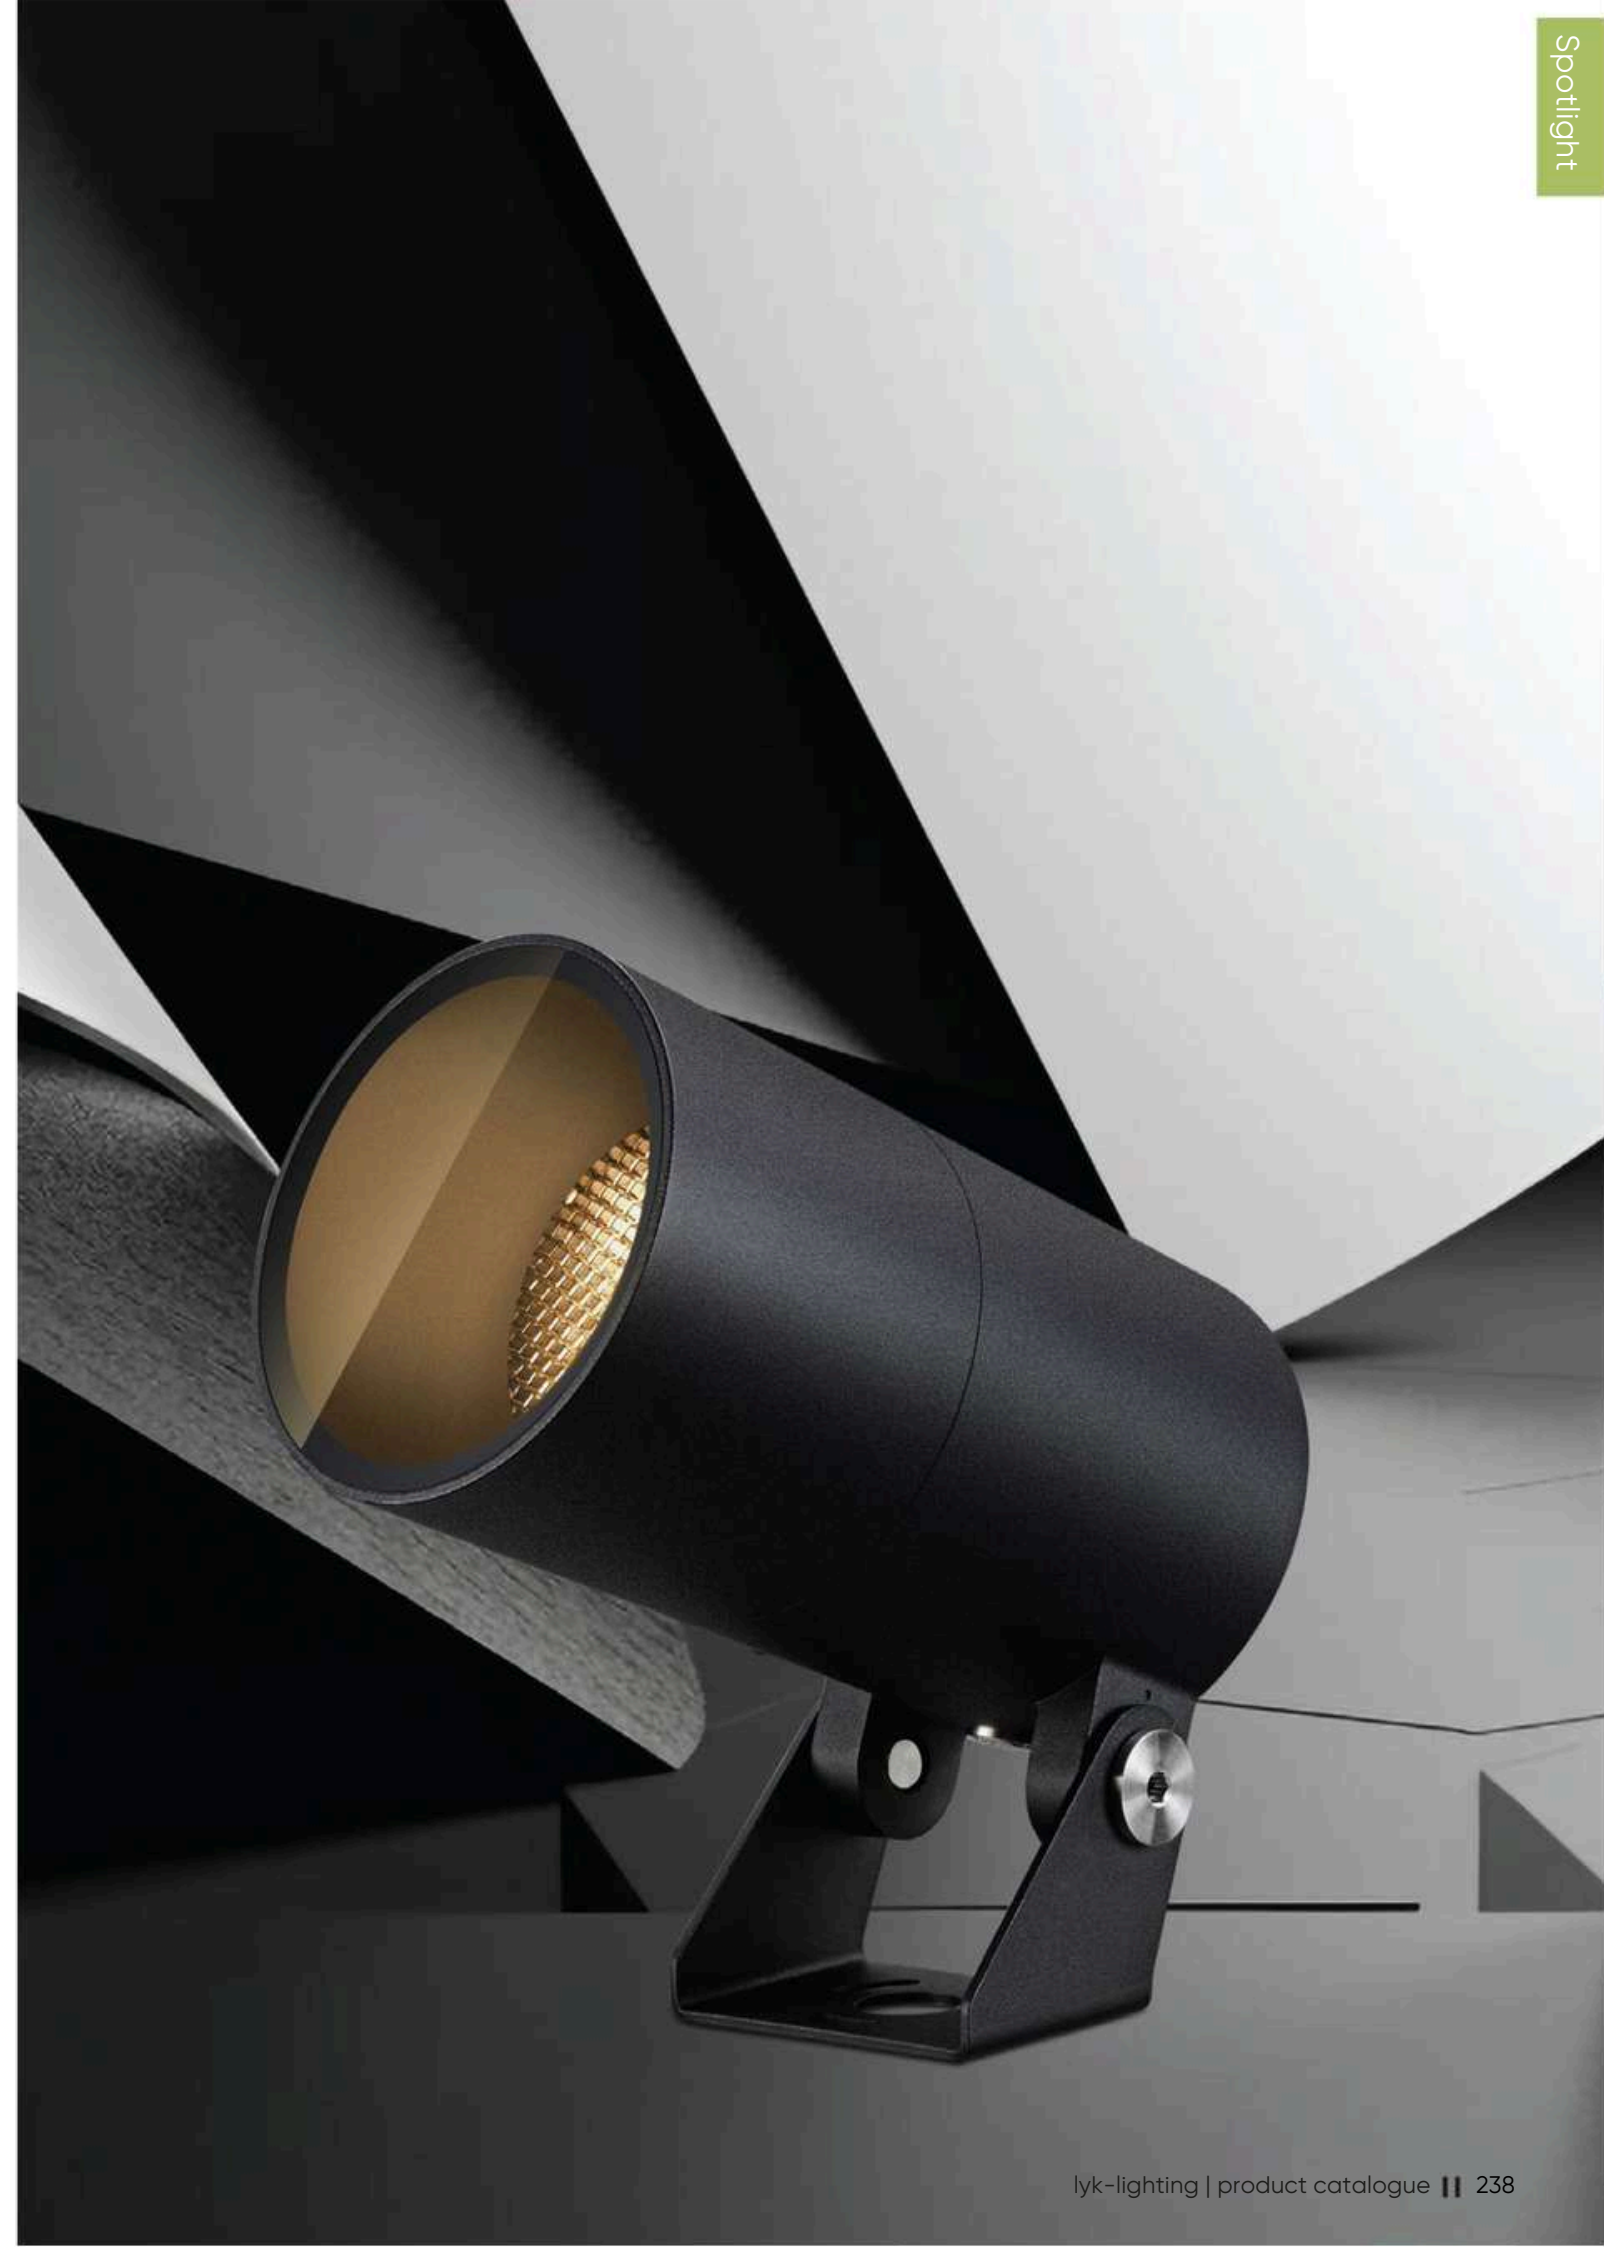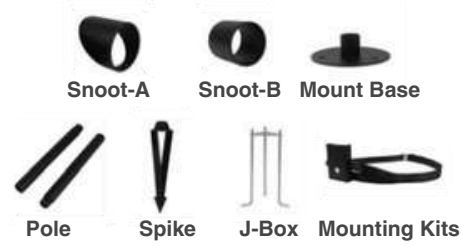

BOLLARD LIGHT

50.7003	243
50.7008A	243
50.7010.A16	244
50.7009	244
50.7011.B1	245
50.7011.A1	245
50.7012.A1	246
LFL020	246
LFL048	247
LFL030	247
LFL051	248
LFL059	248
LFL0013	249
LFL016	249
LFL026	250
LFL063	250
LFL066	251
LFL069	251
LFL041	252
LFL044	252
LFL038	253
LFL034	253
LFL006	254
LFL009	254
LFL072	255
LFL075	255






50.7003 | Bollard light



DIMENSION (mm)

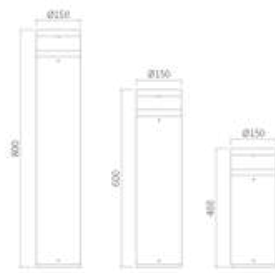

POWER SUPPLY
220-240V DC

LUMEN EFFICACY
50lm/W

CRI (Ra)
90

Information


Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 24W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 7°360°	<input type="checkbox"/> On-o
<input type="checkbox"/> Black		<input type="checkbox"/> 3000K		<input type="checkbox"/> DIM Triac
<input type="checkbox"/> Grey		<input type="checkbox"/> 4000K		<input type="checkbox"/> DIM Bluetooth
<input type="checkbox"/> Silver		<input type="checkbox"/> 5000K		<input type="checkbox"/> DIM DALI
		<input type="checkbox"/> 5700K		<input type="checkbox"/> DIM Zigbee



50.7010.A16 | Bollard light



DIMENSION (mm)

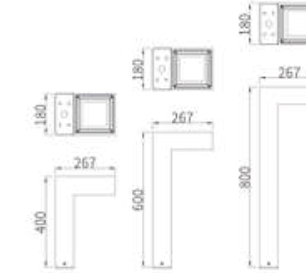


POWER SUPPLY
220-240V DC

LUMEN EFFICACY
78lm/W

CRI (Ra)
90

Information


Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 36W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 7°135°	<input type="checkbox"/> On-o
<input type="checkbox"/> Black	<input type="checkbox"/> 27W	<input type="checkbox"/> 3000K		<input type="checkbox"/> DIM Triac
<input type="checkbox"/> Grey	<input type="checkbox"/> 10.5W	<input type="checkbox"/> 4000K		<input type="checkbox"/> DIM Bluetooth
<input type="checkbox"/> Silver		<input type="checkbox"/> 5000K		<input type="checkbox"/> DIM DALI
		<input type="checkbox"/> 5700K		<input type="checkbox"/> DIM Zigbee

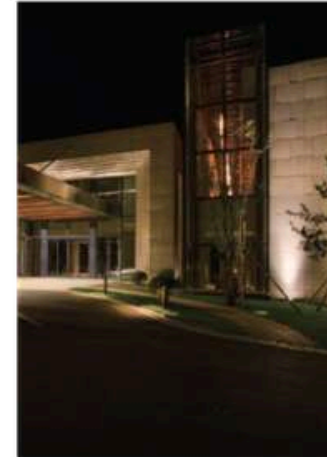

50.7008A | Bollard light



DIMENSION (mm)

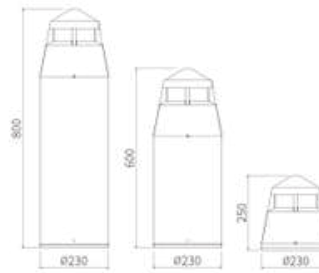


POWER SUPPLY
220-240V DC

LUMEN EFFICACY
100lm/W

CRI (Ra)
90

Information


Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 52W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 7°360°	<input type="checkbox"/> On-o
<input type="checkbox"/> Black		<input type="checkbox"/> 3000K		<input type="checkbox"/> DIM Triac
<input type="checkbox"/> Grey		<input type="checkbox"/> 4000K		<input type="checkbox"/> DIM Bluetooth
<input type="checkbox"/> Silver		<input type="checkbox"/> 5000K		<input type="checkbox"/> DIM DALI
		<input type="checkbox"/> 5700K		<input type="checkbox"/> DIM Zigbee
		<input type="checkbox"/> R+G		

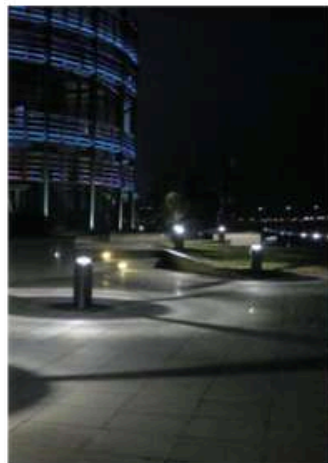

50.7009 | Bollard light



DIMENSION (mm)



POWER SUPPLY
220-240V DC

LUMEN EFFICACY
100lm/W

CRI (Ra)
90

Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 10.5W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 7°135°	<input type="checkbox"/> On-o
<input type="checkbox"/> Black		<input type="checkbox"/> 3000K		<input type="checkbox"/> DIM Triac
<input type="checkbox"/> Grey		<input type="checkbox"/> 4000K		<input type="checkbox"/> DIM Bluetooth
<input type="checkbox"/> Silver		<input type="checkbox"/> 5000K		<input type="checkbox"/> DIM DALI
		<input type="checkbox"/> 5700K		<input type="checkbox"/> DIM Zigbee



50.7011.B1 | Bollard light



DIMENSION (mm)



POWER SUPPLY
220-240V DC

LUMEN EFFICACY
90lm/W

CRI (Ra)
90

Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 27W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 60°	<input type="checkbox"/> On-o
<input type="checkbox"/> Black		<input type="checkbox"/> 3000K		<input type="checkbox"/> DIM Triac
<input type="checkbox"/> Grey		<input type="checkbox"/> 4000K		<input type="checkbox"/> DIM Bluetooth
<input type="checkbox"/> Silver		<input type="checkbox"/> 5000K		<input type="checkbox"/> DIM DALI
		<input type="checkbox"/> 5700K		<input type="checkbox"/> DIM Zigbee



50.7012.A1 | Bollard light



DIMENSION (mm)



POWER SUPPLY
220-240V DC

LUMEN EFFICACY
92lm/W

CRI (Ra)
90

Information


Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 50W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 60°*140°	<input type="checkbox"/> On-o
<input type="checkbox"/> Black		<input type="checkbox"/> 3000K		<input type="checkbox"/> DIM Triac
<input type="checkbox"/> Grey		<input type="checkbox"/> 4000K		<input type="checkbox"/> DIM Bluetooth
<input type="checkbox"/> Silver		<input type="checkbox"/> 5000K		<input type="checkbox"/> DIM DALI
		<input type="checkbox"/> 5700K		<input type="checkbox"/> DIM Zigbee



50.7011.A1 | Bollard light



DIMENSION (mm)



POWER SUPPLY
220-240V DC

LUMEN EFFICACY
90lm/W

CRI (Ra)
90

Information


Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 70W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 40°*90°	<input type="checkbox"/> On-o
<input type="checkbox"/> Black	<input type="checkbox"/> 53W	<input type="checkbox"/> 3000K		<input type="checkbox"/> DIM Triac
<input type="checkbox"/> Grey		<input type="checkbox"/> 4000K		<input type="checkbox"/> DIM Bluetooth
<input type="checkbox"/> Silver		<input type="checkbox"/> 5000K		<input type="checkbox"/> DIM DALI
		<input type="checkbox"/> 5700K		<input type="checkbox"/> DIM Zigbee



LFL020 | Bollard light



DIMENSION (mm)




POWER SUPPLY
220-240V DC

LUMEN EFFICACY
80lm/W

CRI (Ra)
90

Information


Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 4W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 360°	<input type="checkbox"/> On-o
<input type="checkbox"/> Black	<input type="checkbox"/> 6W			<input type="checkbox"/> DIM Triac
<input type="checkbox"/> Grey				<input type="checkbox"/> DIM Bluetooth
<input type="checkbox"/> Silver				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

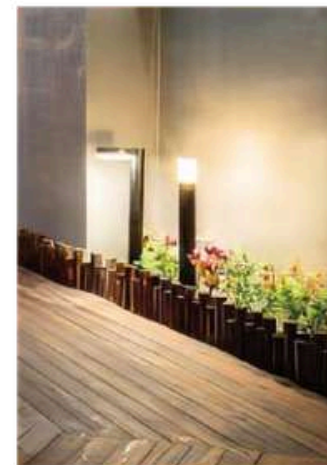

LFL048 | Bollard light



DIMENSION (mm)

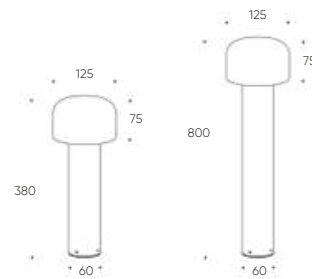

POWER SUPPLY
220-240V DC

LUMEN EFFICACY
100lm/W

CRI (Ra)
90

Information


Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 6W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 360°	<input type="checkbox"/> On-o
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
<input type="checkbox"/> Grey				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee



LFL051 | Bollard light



DIMENSION (mm)

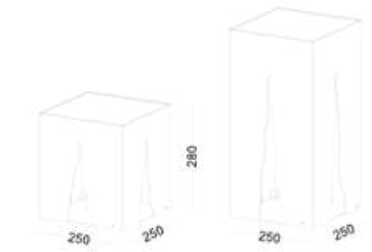

POWER SUPPLY
220-240V DC

LUMEN EFFICACY
80lm/W

CRI (Ra)
90

Information


Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 4W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 360°	<input type="checkbox"/> On-o
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee



LFL030 | Bollard light



DIMENSION (mm)




POWER SUPPLY
220-240V DC

LUMEN EFFICACY
40m/W

CRI (Ra)
90

Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 3W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 360°	<input type="checkbox"/> On-o
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
<input type="checkbox"/> Grey				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

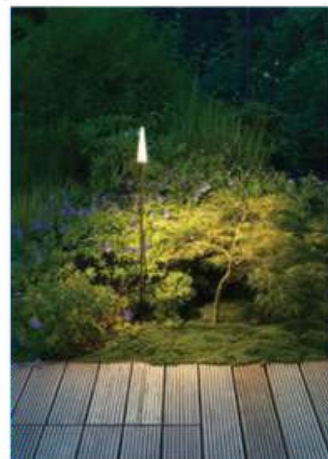

LFL059 | Bollard light



DIMENSION (mm)



POWER SUPPLY
220-240V DC

LUMEN EFFICACY
83lm/W

CRI (Ra)
90

Information


Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 6W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 38°	<input type="checkbox"/> On-o
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee



LFL0013 | Bollard light



DIMENSION (mm)

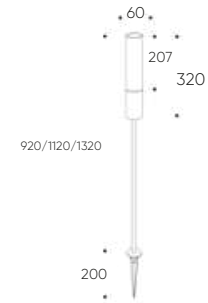

POWER SUPPLY
220-240V DC

LUMEN EFFICACY
72lm/W

CRI (Ra)
90


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 6W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 360°	<input type="checkbox"/> On-o
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

LFL026 | Bollard light



DIMENSION (mm)

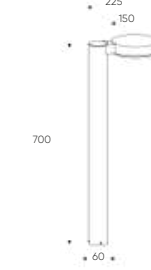

POWER SUPPLY
220-240V DC

LUMEN EFFICACY
90lm/W

CRI (Ra)
90


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 10W	<input type="checkbox"/> 3000K		<input type="checkbox"/> On-o
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

LFL016 | Bollard light



DIMENSION (mm)

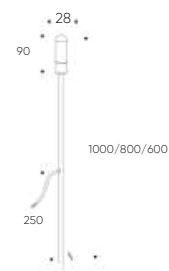

POWER SUPPLY
220-240V DC

LUMEN EFFICACY
70lm/W

CRI (Ra)
90


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 1W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 360°	<input type="checkbox"/> On-o
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

LFL063 | Bollard light



DIMENSION (mm)



POWER SUPPLY
220-240V DC

LUMEN EFFICACY
100lm/W

CRI (Ra)
90

Information


Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 10W	<input type="checkbox"/> 3000K		<input type="checkbox"/> On-o
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee



LFL066 | Bollard light



DIMENSION (mm)

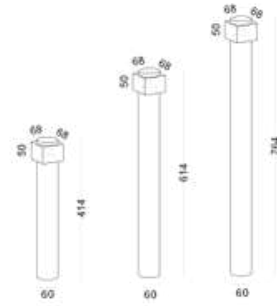

POWER SUPPLY
220-240V DC

LUMEN EFFICACY
83lm/W

CRI (Ra)
>90


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 6W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 360°	<input type="checkbox"/> On-o
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
<input type="checkbox"/> Grey				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

LFL041 | Bollard light



DIMENSION (mm)

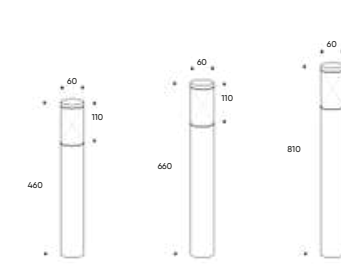

POWER SUPPLY
220-240V DC

LUMEN EFFICACY
83lm/W

CRI (Ra)
>90

Information


Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 6W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 360°	<input type="checkbox"/> On-o
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
<input type="checkbox"/> Grey				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee



LFL069 | Bollard light



DIMENSION (mm)

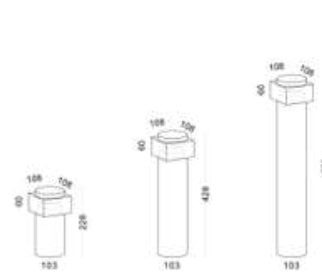

POWER SUPPLY
220-240V DC

LUMEN EFFICACY
90lm/W

CRI (Ra)
>90

Information


Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 9W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 360°	<input type="checkbox"/> On-o
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee



LFL044 | Bollard light



DIMENSION (mm)

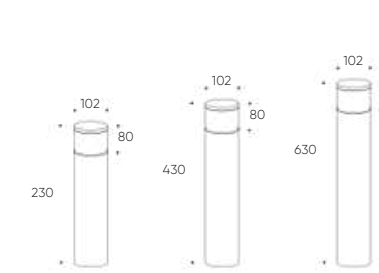

POWER SUPPLY
220-240V DC

LUMEN EFFICACY
90lm/W

CRI (Ra)
>90


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 9W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 360°	<input type="checkbox"/> On-o
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
<input type="checkbox"/> Grey				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

LFL038 | Bollard light



DIMENSION (mm)

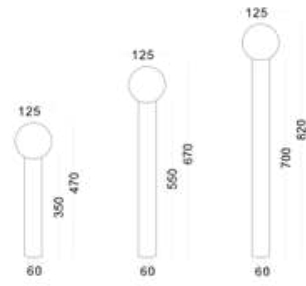

POWER SUPPLY
220-240V DC

LUMEN EFFICACY
83lm/W

CRI (Ra)
90

Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 6W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 360°	<input type="checkbox"/> On-o
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
<input type="checkbox"/> Grey				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

LFL034 | Bollard light



DIMENSION (mm)



POWER SUPPLY
220-240V DC

LUMEN EFFICACY
86lm/W

CRI (Ra)
90


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> Gold	<input type="checkbox"/> 3W <input type="checkbox"/> 5W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 360°	<input type="checkbox"/> On-o
				<input type="checkbox"/> DIM Triac
				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

LFL006 | Bollard light



DIMENSION (mm)

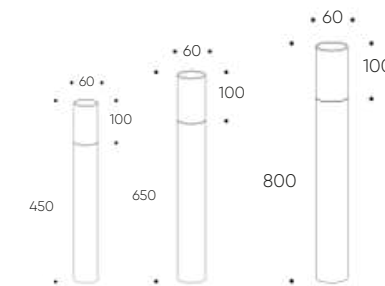

POWER SUPPLY
220-240V DC

LUMEN EFFICACY
72lm/W

CRI (Ra)
90


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 6W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 360°	<input type="checkbox"/> On-o
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

LFL009 | Bollard light



DIMENSION (mm)

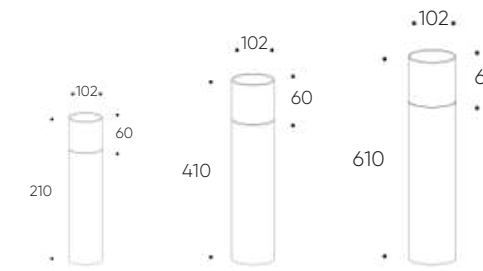

POWER SUPPLY
220-240V DC

LUMEN EFFICACY
90lm/W

CRI (Ra)
90


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 9W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 360°	<input type="checkbox"/> On-o
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

LFL072 | Bollard light



DIMENSION (mm)

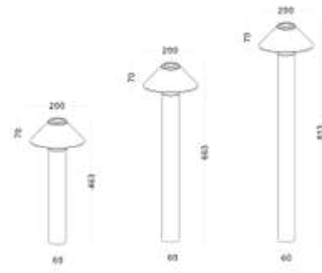

POWER SUPPLY
220-240V DC

LUMEN EFFICACY
90lm/W

CRI (Ra)
90

Information


Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 6W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 360°	<input type="checkbox"/> On-o
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
<input type="checkbox"/> Grey				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee



LFL075 | Bollard light



DIMENSION (mm)

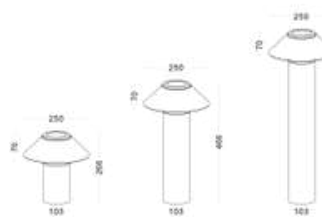

POWER SUPPLY
220-240V DC

LUMEN EFFICACY
90/W

CRI (Ra)
> 90

Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 9W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 360°	<input type="checkbox"/> On-o
<input type="checkbox"/> Black				<input type="checkbox"/> DIM Triac
<input type="checkbox"/> Grey				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee




INGROUND LIGHT

ODL001	261
ODL001-IN12	261
ODL028	262
ODL028-IN12	262
ODL047-IN220	263
ODL048-IN220	263
ODL049-IN22	264
VIVA-D1 VIVA-	265
D2 VIVA-D3	266
VIVA-F1	267
	268





ODL001 | Bollard light

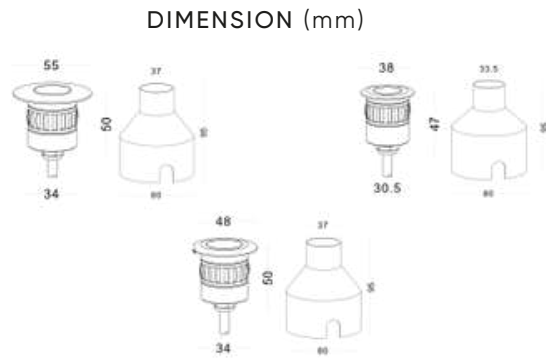

POWER SUPPLY
220-240V DC



LUMEN EFFICACY
70lm/W

CRI (Ra)
90

Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 1W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 30°	<input type="checkbox"/> On-o
<input type="checkbox"/> Black	<input type="checkbox"/> 3W			<input type="checkbox"/> DIM Triac
<input type="checkbox"/> Inox				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

ODL028 | Bollard light

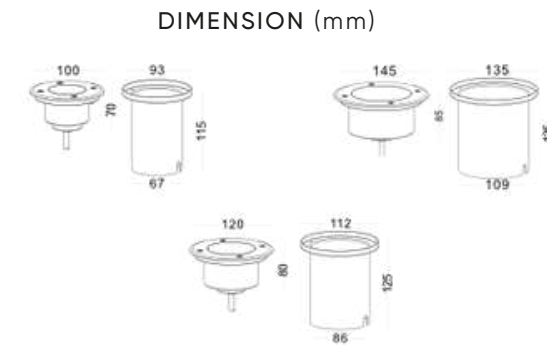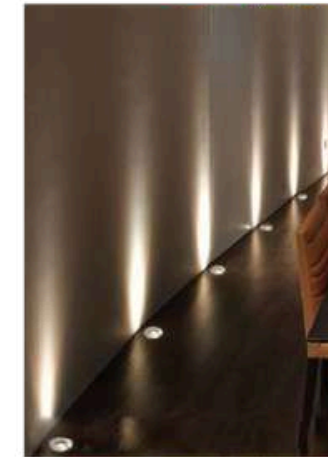

POWER SUPPLY
220-240V DC


LUMEN EFFICACY
75lm/W

CRI (Ra)
90

Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 36W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 38°	<input type="checkbox"/> On-o
<input type="checkbox"/> Black	<input type="checkbox"/> 27W	<input type="checkbox"/> 3000K		<input type="checkbox"/> DIM Triac
<input type="checkbox"/> Grey	<input type="checkbox"/> 10.5W	<input type="checkbox"/> 4000K		<input type="checkbox"/> DIM Bluetooth
<input type="checkbox"/> Silver		<input type="checkbox"/> 5000K		<input type="checkbox"/> DIM DALI
		<input type="checkbox"/> 5700K		<input type="checkbox"/> DIM Zigbee

ODL001-IN12 | Bollard light

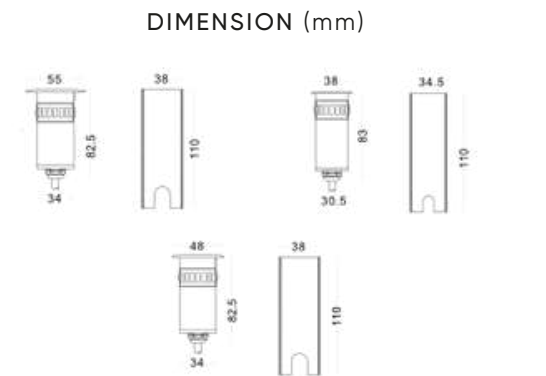

POWER SUPPLY
220-240V DC


LUMEN EFFICACY
70lm/W

CRI (Ra)
90

Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 1W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 30°	<input type="checkbox"/> On-o
<input type="checkbox"/> Black	<input type="checkbox"/> 3W			<input type="checkbox"/> DIM Triac
<input type="checkbox"/> Inox				<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

ODL028-IN12 | Bollard light

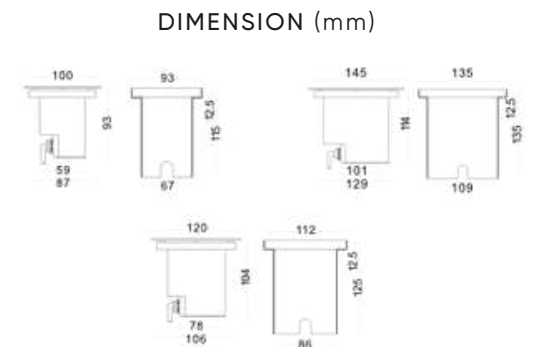

POWER SUPPLY
220-240V DC


LUMEN EFFICACY
75lm/W

CRI (Ra)
90


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 6W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 38°	<input type="checkbox"/> On-o
<input type="checkbox"/> Black	<input type="checkbox"/> 9W			<input type="checkbox"/> DIM Triac
<input type="checkbox"/> Inox	<input type="checkbox"/> 12W			<input type="checkbox"/> DIM Bluetooth
				<input type="checkbox"/> DIM DALI
				<input type="checkbox"/> DIM Zigbee

ODL047-IN220 | Bollard light

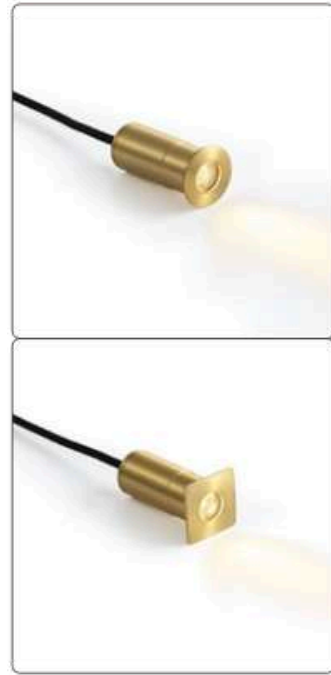

DIMENSION (mm)

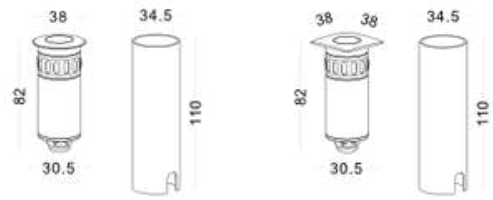

POWER SUPPLY
220-240V DC

LUMEN EFFICACY
70lm/W

CRI (Ra)
90


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> Gold	<input type="checkbox"/> 1W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 30°	<input type="checkbox"/> On-o <input type="checkbox"/> DIM Triac <input type="checkbox"/> DIM Bluetooth <input type="checkbox"/> DIM DALI <input type="checkbox"/> DIM Zigbee

ODL049-IN22 | Bollard light



DIMENSION (mm)

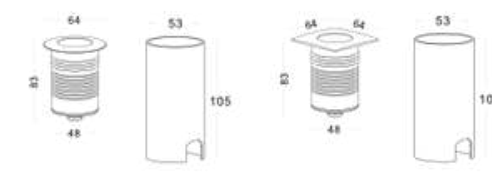

POWER SUPPLY
220-240V DC

LUMEN EFFICACY
86lm/W

CRI (Ra)
90


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> Gold	<input type="checkbox"/> 5W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 20°	<input type="checkbox"/> On-o <input type="checkbox"/> DIM Triac <input type="checkbox"/> DIM Bluetooth <input type="checkbox"/> DIM DALI <input type="checkbox"/> DIM Zigbee

ODL048-IN220 | Bollard light



DIMENSION (mm)

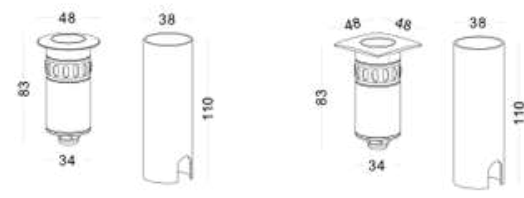

POWER SUPPLY
220-240V DC

LUMEN EFFICACY
70lm/W

CRI (Ra)
90


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> Gold	<input type="checkbox"/> 3W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 30°	<input type="checkbox"/> On-o <input type="checkbox"/> DIM Triac <input type="checkbox"/> DIM Bluetooth <input type="checkbox"/> DIM DALI <input type="checkbox"/> DIM Zigbee





DIMENSION (mm)



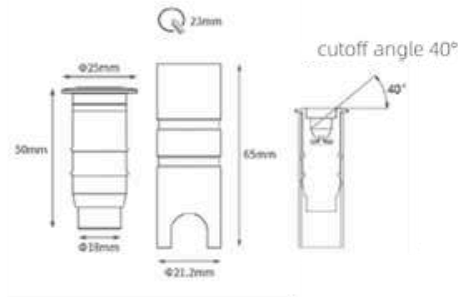


POWER SUPPLY
220-240V DC

LUMEN EFFICACY
50lm/W

CRI (Ra)
90

Light distribution

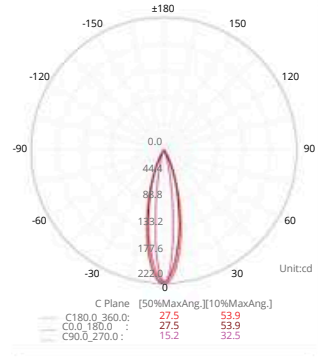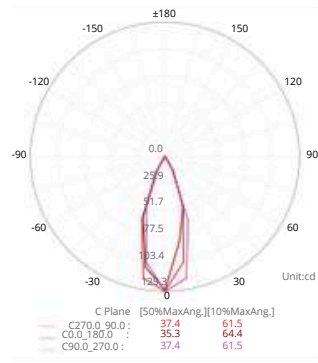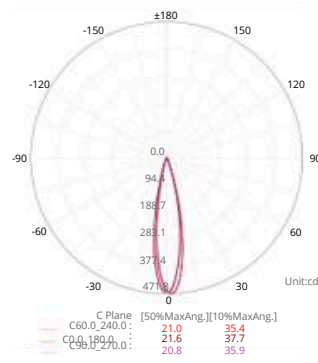

Information

Color

- White
- Black
- Grey

Power

- 1.5W

CCT

- 2700K
- 3000K
- 4000K

Beam

- 21°
- 37.4°
- 15.2*27.5°


LED-Driver

- On-o
- DIM Triac
- DIM Bluetooth
- DIM DALI
- DIM Zigbee

Accessory



DIMENSION (mm)




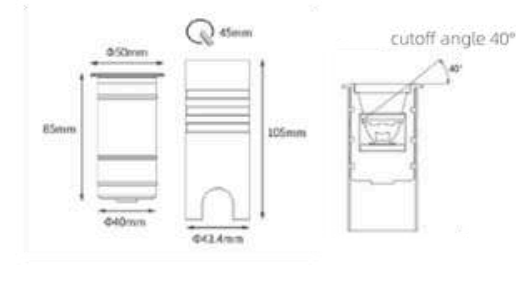


POWER SUPPLY
220-240V DC

LUMEN EFFICACY
50lm/W

CRI (Ra)
90

Light distribution

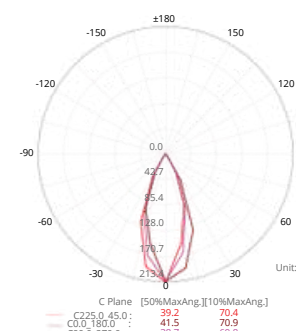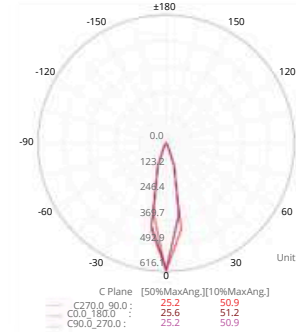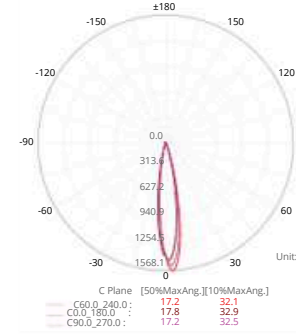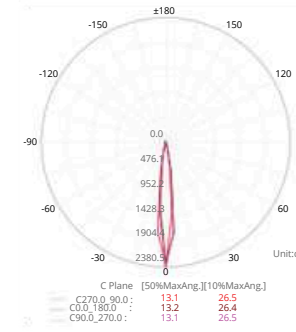

Information

Color

- White
- Black
- Grey

Power

- 3.5W

CCT

- 2700K
- 3000K
- 4000K

Beam

- 13.1°
- 17.2°
- 25.2°
- 39.2°

LED-Driver


- On-o
- DIM Triac
- DIM Bluetooth
- DIM DALI
- DIM Zigbee

Accessory





DIMENSION (mm)




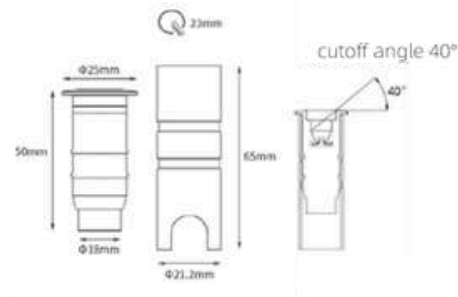


POWER SUPPLY
220-240V DC

LUMEN EFFICACY
50lm/W

CRI (Ra)
90

Light distribution

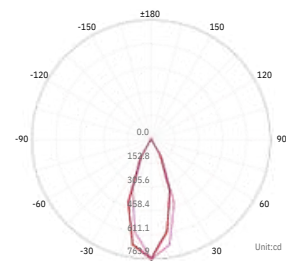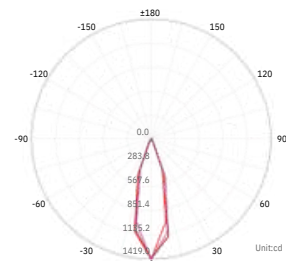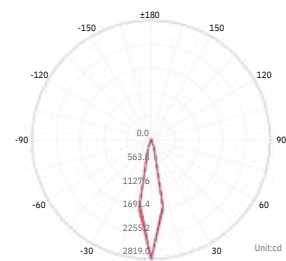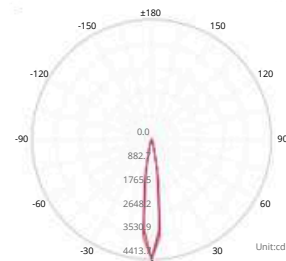

Information

Color

- White
- Black
- Grey

Power

- 7W

CCT

- 2700K
- 3000K
- 4000K

Beam

- 15.8°
- 23.3°
- 30.9°
- 40.1°


LED-Driver

- On-o
- DIM Triac
- DIM Bluetooth
- DIM DALI
- DIM Zigbee

Accessory




Aluminum Recessed Sleeve

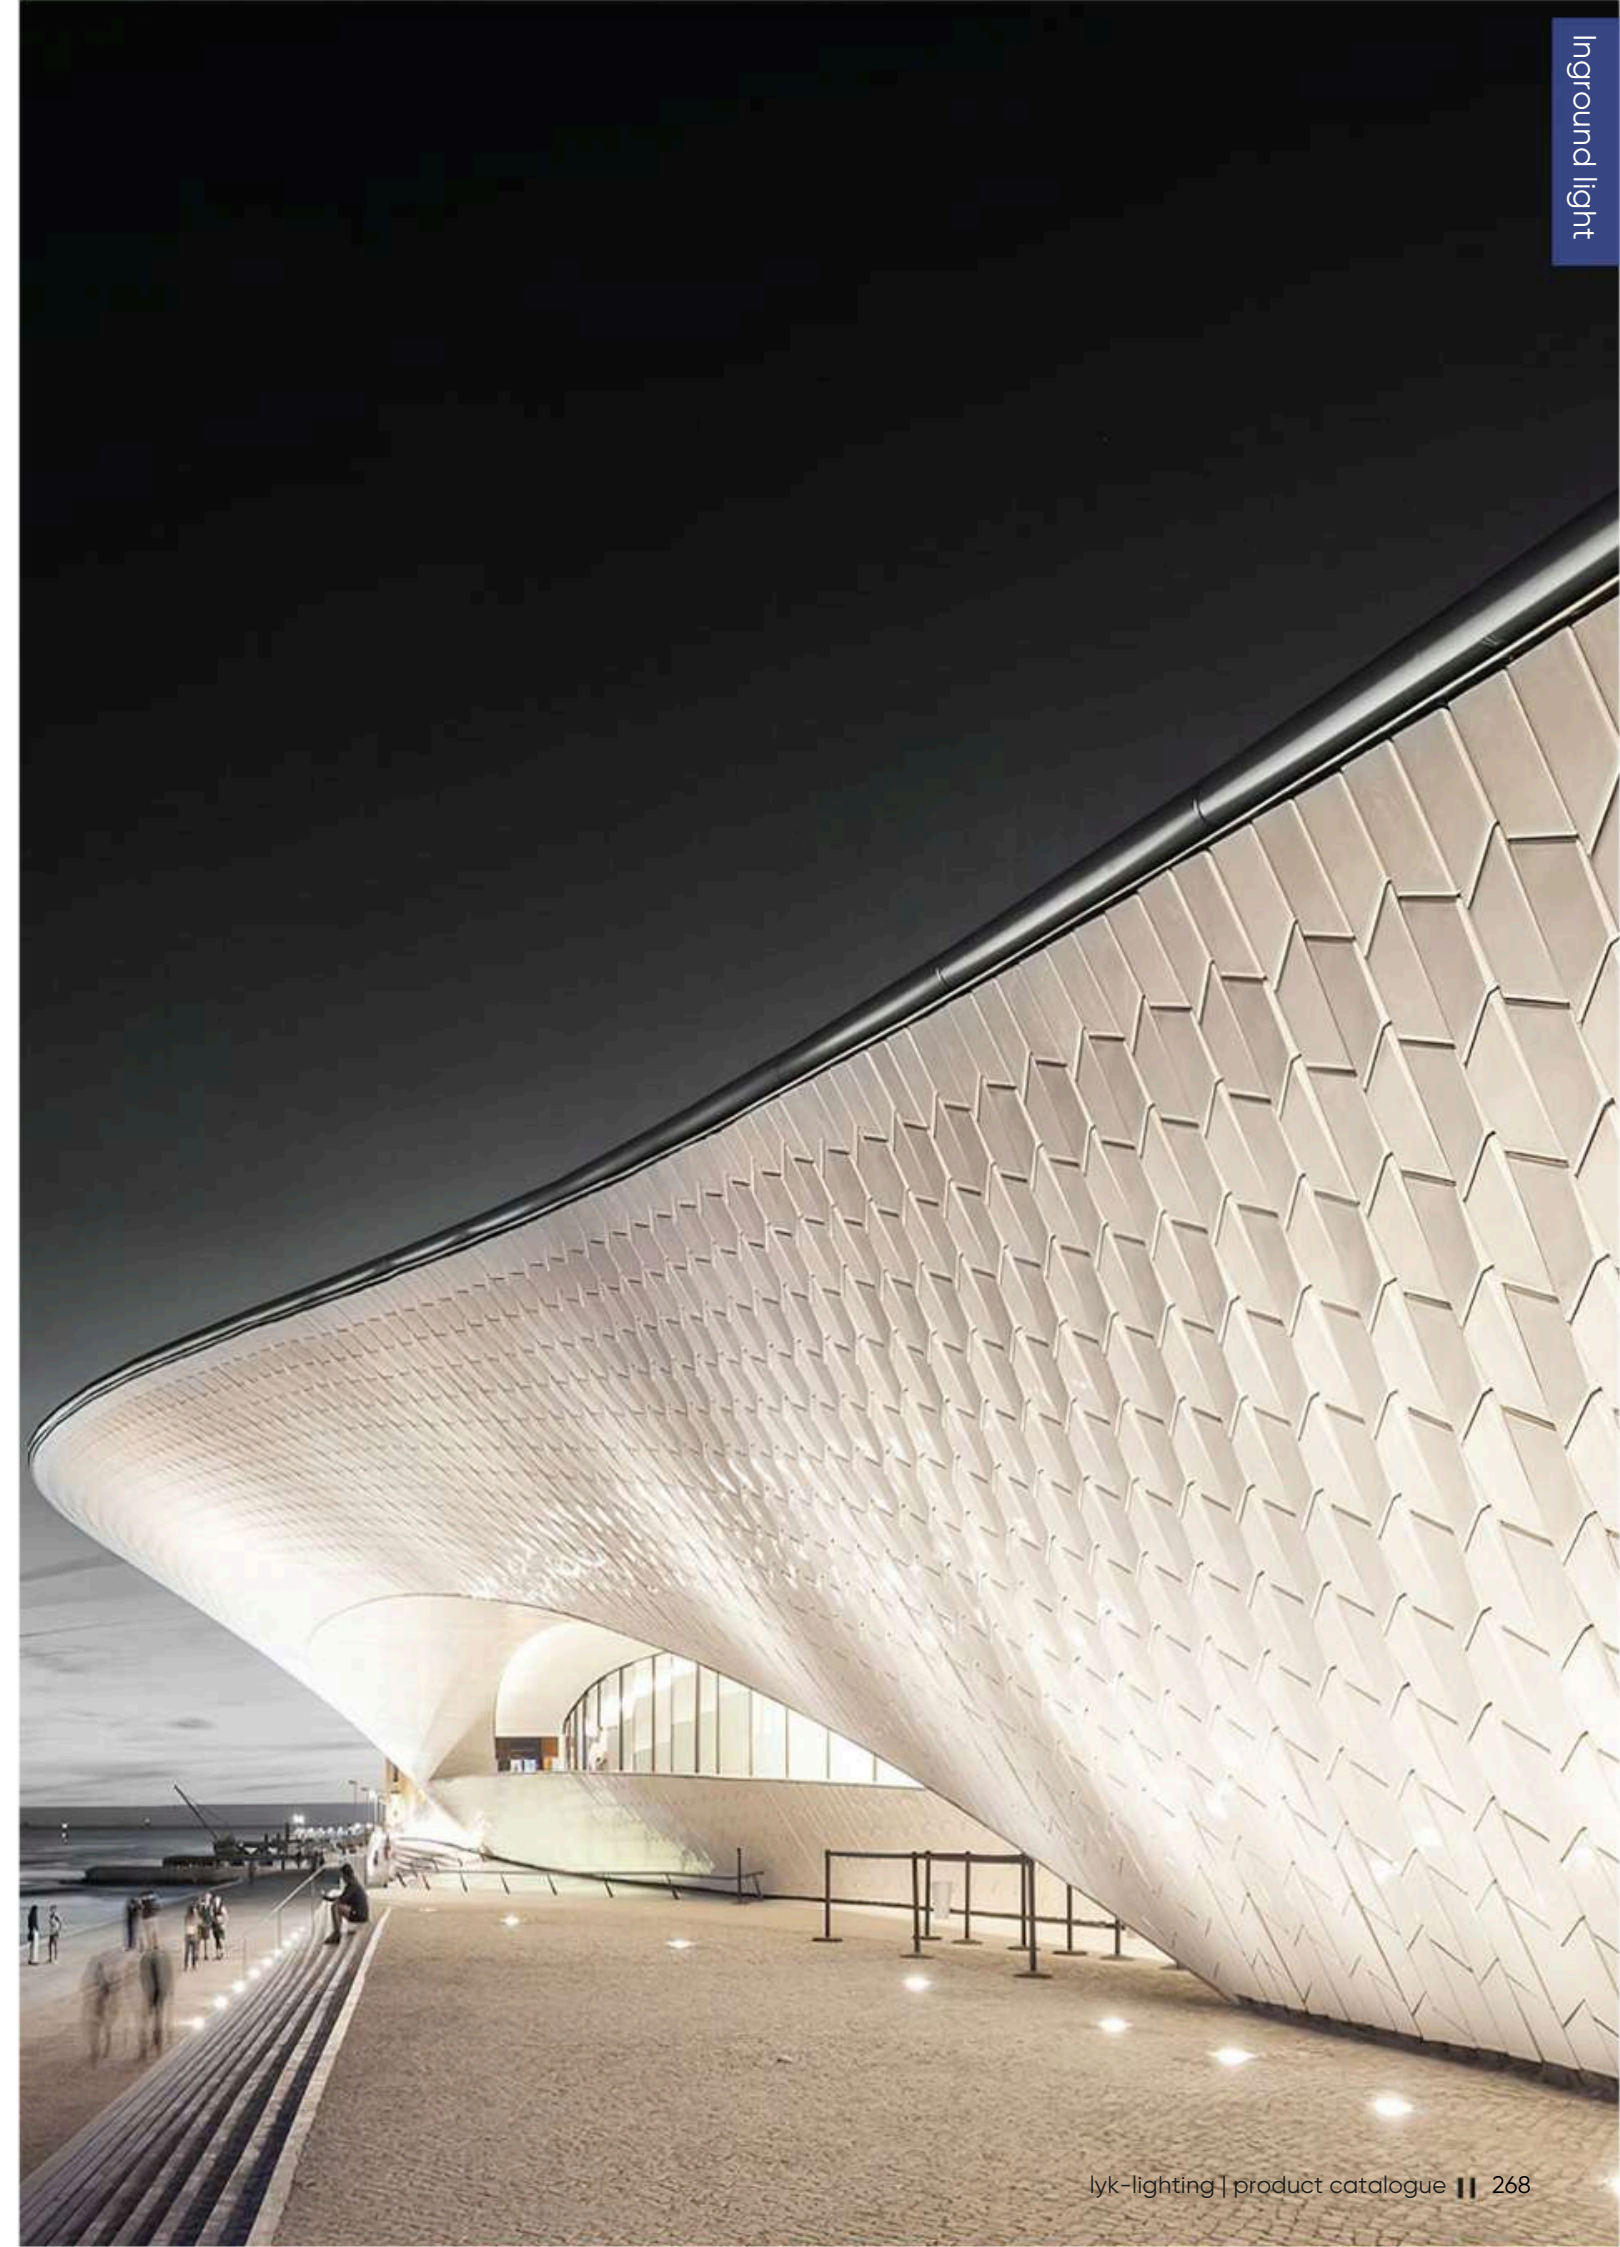



DIMENSION (mm)

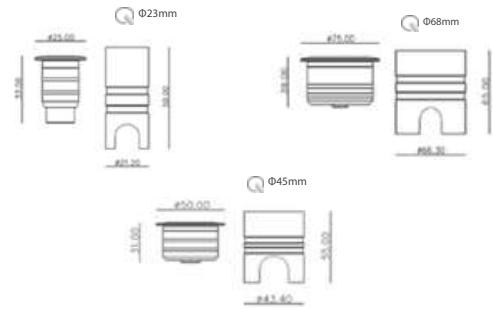

POWER SUPPLY
220-240V DC

LUMEN EFFICACY
50lm/W

CRI (Ra)
90

Information

Color

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 0.12W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 120°	<input type="checkbox"/> On-o
<input type="checkbox"/> Black	<input type="checkbox"/> 0.45W	<input type="checkbox"/> 3000K		<input type="checkbox"/> DIM Triac
<input type="checkbox"/> Grey	<input type="checkbox"/> 0.9W	<input type="checkbox"/> 4000K <input type="checkbox"/> 5000K		<input type="checkbox"/> DIM Bluetooth <input type="checkbox"/> DIM DALI <input type="checkbox"/> DIM Zigbee

Accessory



Aluminum Recessed Sleeve



UNDERWATER LIGHT

80.803	275
80.8031	277
80.80336	279
80.803512	281
80.8030R	283
80.8031R	285
80.8033R6	287
80.8033R12	289
80.8033R12	291
31201.110	291
31201.120	292
31201.02	292
31201.030	293
31201.040	293




409
412
412
412
412
412
414
414
416
416
416
416
418
418
418
418
418
418
418







DIMENSION (mm)

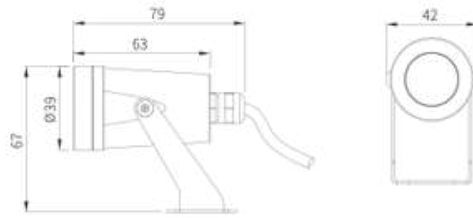


POWER SUPPLY
220-240V DC

LUMEN EFFICACY
130lm/W

CRI (Ra)
90

Light distribution

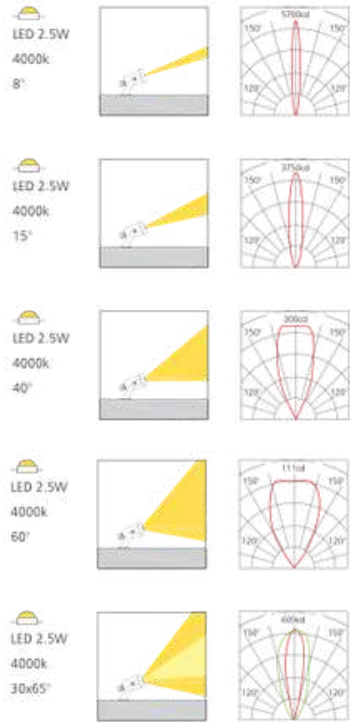

Information


Color

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> Inox	<input type="checkbox"/> 2.5W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 8° 15°	<input type="checkbox"/> On-o
		<input type="checkbox"/> 3000K	<input type="checkbox"/> 40°	<input type="checkbox"/> DIM Triac
		<input type="checkbox"/> 4000K	<input type="checkbox"/> 60°	<input type="checkbox"/> DIM Bluetooth
		<input type="checkbox"/> 5000K	<input type="checkbox"/> 30*65°	<input type="checkbox"/> DIM DALI
		<input type="checkbox"/> 5700K	<input type="checkbox"/>	<input type="checkbox"/> DIM Zigbee





DIMENSION (mm)

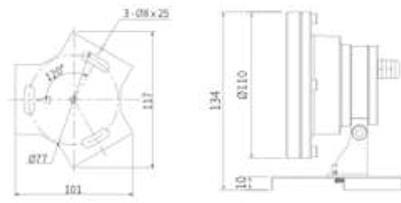


POWER SUPPLY
220-240V DC

LUMEN EFFICACY
103lm/W

CRI (Ra)
90

Light distribution

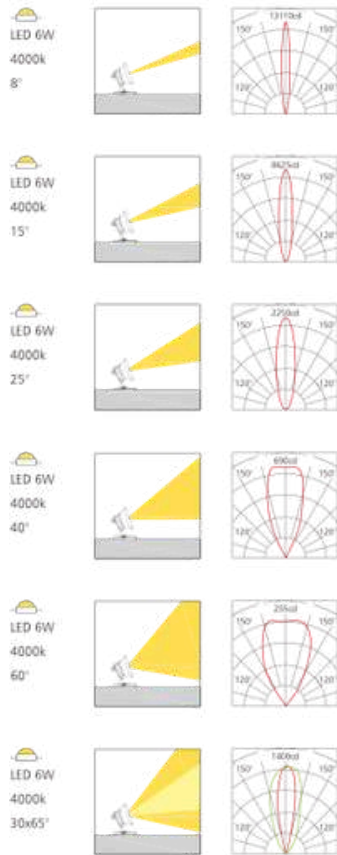

Information


Color

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> Inox	<input type="checkbox"/> 6W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 8° 15°	<input type="checkbox"/> On-o
		<input type="checkbox"/> 3000K	<input type="checkbox"/> 40°	<input type="checkbox"/> DIM Triac
		<input type="checkbox"/> 4000K	<input type="checkbox"/> 60°	<input type="checkbox"/> DIM Bluetooth
		<input type="checkbox"/> 5000K	<input type="checkbox"/> 30°*65°	<input type="checkbox"/> DIM DALI
		<input type="checkbox"/> 5700K	<input type="checkbox"/>	<input type="checkbox"/> DIM Zigbee
		<input type="checkbox"/> RGB		





DIMENSION (mm)

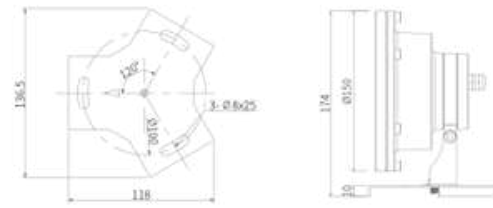


POWER SUPPLY
220-240V DC

LUMEN EFFICACY
330lm/W

CRI (Ra)
> 90

Light distribution

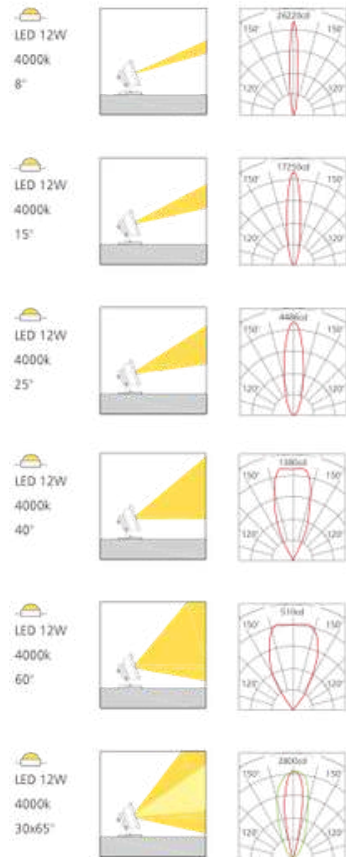

Information


Color

	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> Inox	<input type="checkbox"/> 12W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 8° 15°	<input type="checkbox"/> On-o
	<input type="checkbox"/> 18W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 40°	<input type="checkbox"/> DIM Triac
		<input type="checkbox"/> 4000K	<input type="checkbox"/> 60°	<input type="checkbox"/> DIM Bluetooth
		<input type="checkbox"/> 5000K	<input type="checkbox"/> 30*65°	<input type="checkbox"/> DIM DALI
		<input type="checkbox"/> 5700K	<input type="checkbox"/>	<input type="checkbox"/> DIM Zigbee
		<input type="checkbox"/> RGB		





DIMENSION (mm)

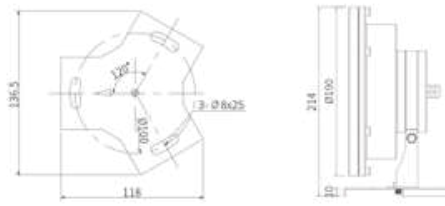


POWER SUPPLY
220-240V DC

LUMEN EFFICACY
98lm/W

CRI (Ra)
90

Light distribution

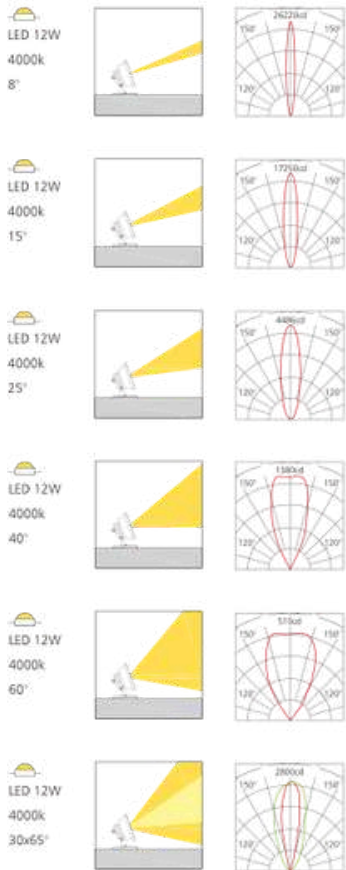

Information

Color

Inox

Power

24W
 36W

CCT


2700K
 3000K
 4000K
 5000K
 5700K
 RGB

Beam

8°
 15°
 40°
 60°
 30°x65°


LED-Driver

On-o
 DIM Triac
 DIM Bluetooth
 DIM DALI
 DIM Zigbee

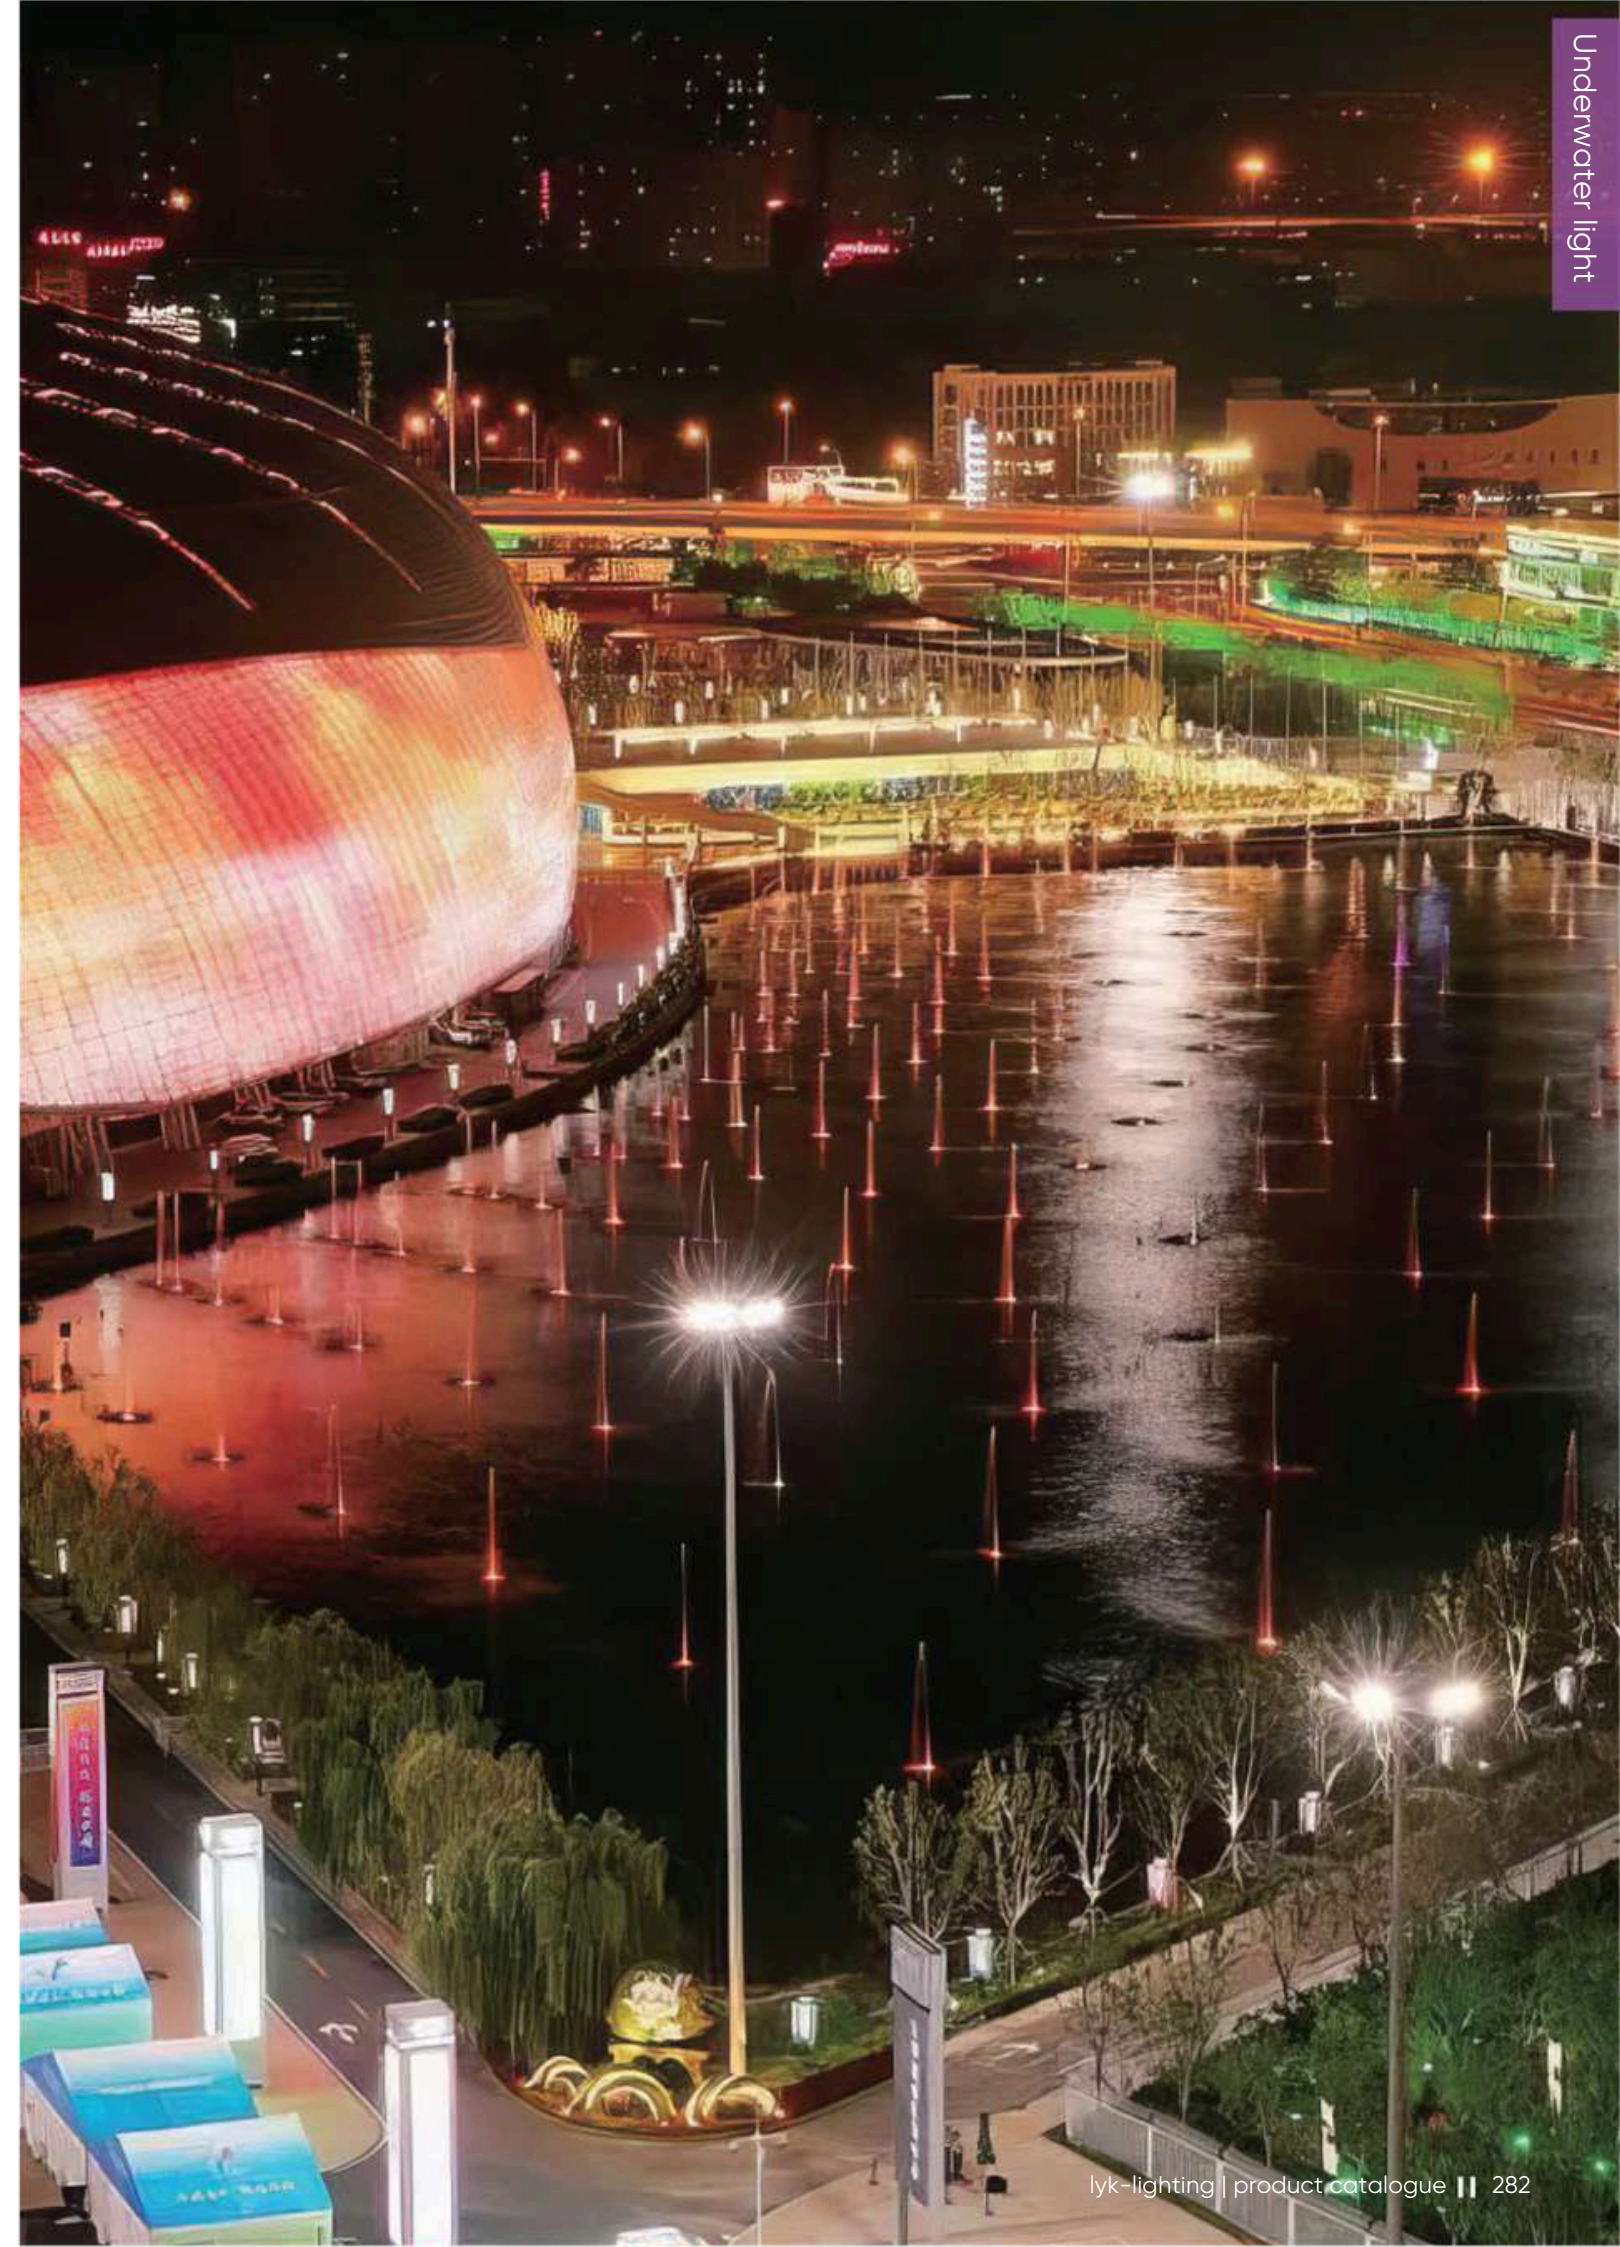



DIMENSION (mm)

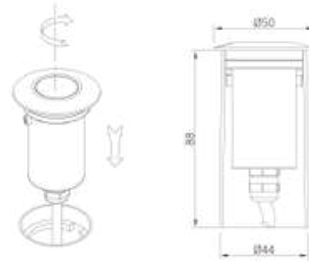


POWER SUPPLY
220-240V DC

LUMEN EFFICACY
104lm/W

CRI (Ra)
90

Light distribution

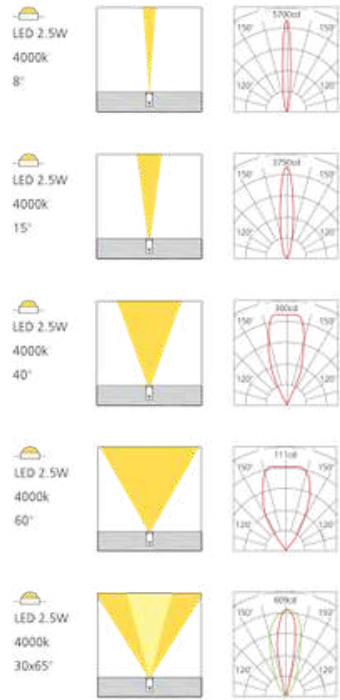

Information


Color

	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> Inox	<input type="checkbox"/> 2.5W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 8° 15°	<input type="checkbox"/> On-o
		<input type="checkbox"/> 3000K	<input type="checkbox"/> 40°	<input type="checkbox"/> DIM Triac
		<input type="checkbox"/> 4000K	<input type="checkbox"/> 60°	<input type="checkbox"/> DIM Bluetooth
		<input type="checkbox"/> 5000K	<input type="checkbox"/> 30°65°	<input type="checkbox"/> DIM DALI
		<input type="checkbox"/> 5700K	<input type="checkbox"/>	<input type="checkbox"/> DIM Zigbee





DIMENSION (mm)




POWER SUPPLY
220-240V DC

LUMEN EFFICACY
130lm/W

CRI (Ra)
90

Light distribution

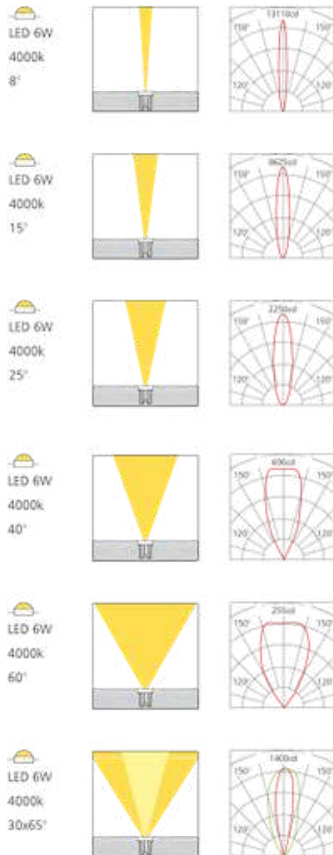

Information


Color

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> Inox	<input type="checkbox"/> 6W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 8° 15°	<input type="checkbox"/> On-o
		<input type="checkbox"/> 3000K	<input type="checkbox"/> 40°	<input type="checkbox"/> DIM Triac
		<input type="checkbox"/> 4000K	<input type="checkbox"/> 60°	<input type="checkbox"/> DIM Bluetooth
		<input type="checkbox"/> 5000K	<input type="checkbox"/> 30°*65°	<input type="checkbox"/> DIM DALI
		<input type="checkbox"/> 5700K	<input type="checkbox"/>	<input type="checkbox"/> DIM Zigbee
		<input type="checkbox"/> RGB		





DIMENSION (mm)

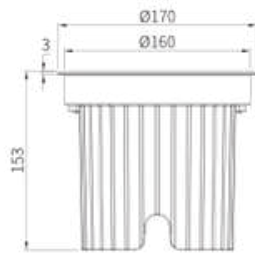


POWER SUPPLY
220-240V DC

LUMEN EFFICACY
130lm/W

CRI (Ra)
90

Light distribution

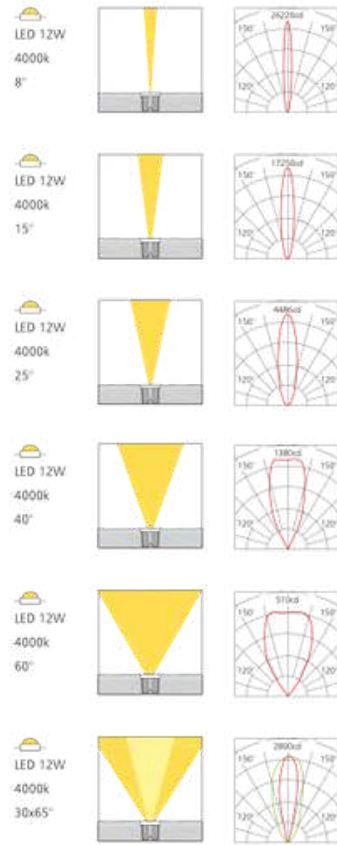

Information


Color

	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> Inox	<input type="checkbox"/> 12W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 8° 15°	<input type="checkbox"/> On-o
	<input type="checkbox"/> 18W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 40°	<input type="checkbox"/> DIM Triac
		<input type="checkbox"/> 4000K	<input type="checkbox"/> 60°	<input type="checkbox"/> DIM Bluetooth
		<input type="checkbox"/> 5000K	<input type="checkbox"/> 30*65°	<input type="checkbox"/> DIM DALI
		<input type="checkbox"/> 5700K	<input type="checkbox"/>	<input type="checkbox"/> DIM Zigbee





DIMENSION (mm)

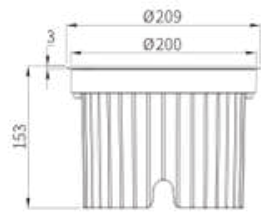


POWER SUPPLY
220-240V DC

LUMEN EFFICACY
130lm/W

CRI (Ra)
90


Light distribution

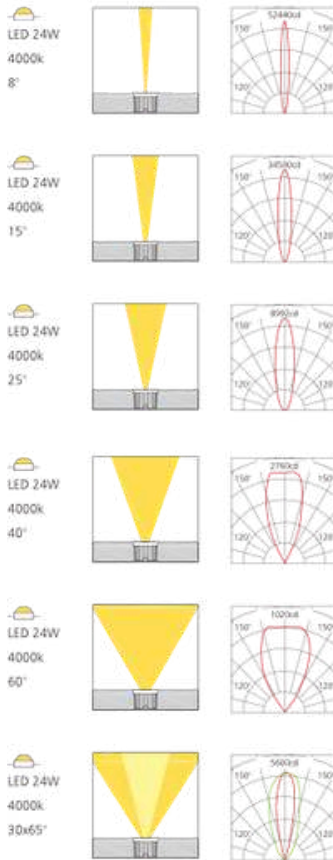

Information

Color


	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> Inox	<input type="checkbox"/> 24W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 8° 15°	<input type="checkbox"/> On-o
	<input type="checkbox"/> 36W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 40°	<input type="checkbox"/> DIM Triac
		<input type="checkbox"/> 4000K	<input type="checkbox"/> 60°	<input type="checkbox"/> DIM Bluetooth
		<input type="checkbox"/> 5000K	<input type="checkbox"/> 30°*65°	<input type="checkbox"/> DIM DALI
		<input type="checkbox"/> 5700K	<input type="checkbox"/>	<input type="checkbox"/> DIM Zigbee
		<input type="checkbox"/> RGB		

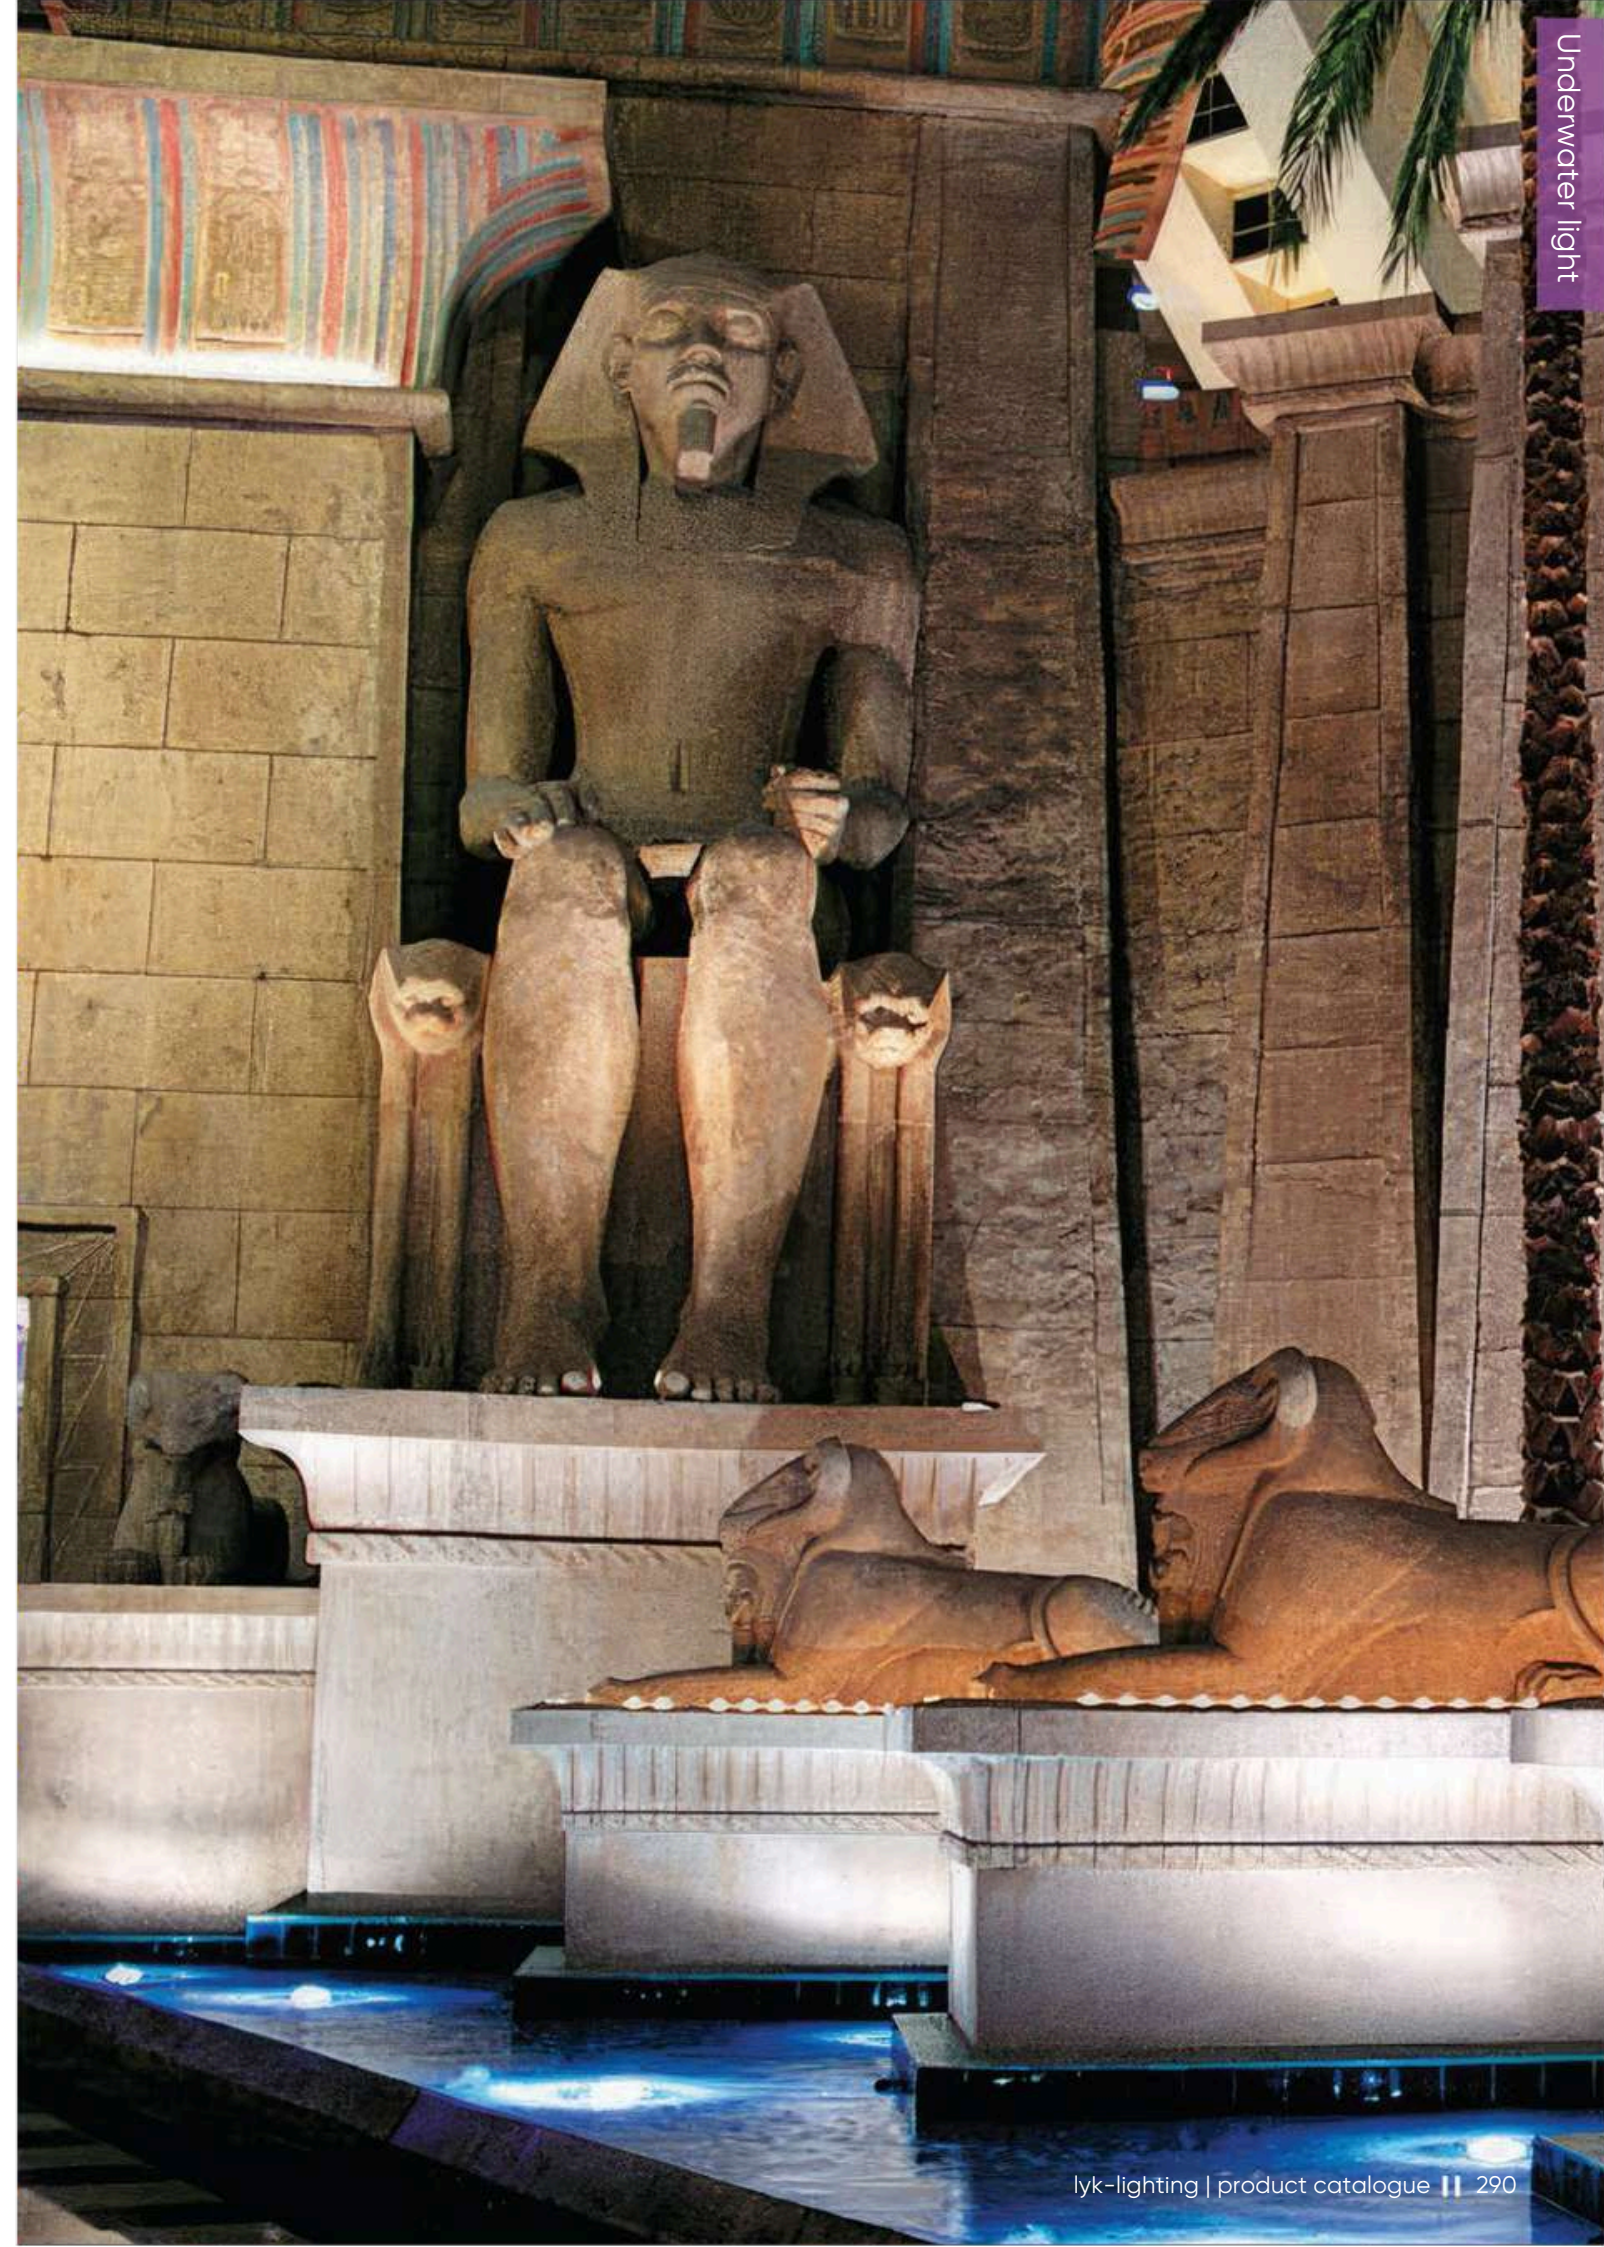

31201.100 | Underwater light



DIMENSION (mm)




POWER SUPPLY
220-240V DC

LUMEN EFFICACY
94lm/W


CRI (Ra)
90

Light distribution


2W-15° 2700K



2W-20° 2700K



2W-30° 2700K




Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> Inox	<input type="checkbox"/> 2W	<input type="checkbox"/> 2700K <input type="checkbox"/> 3000K <input type="checkbox"/> 4000K	<input type="checkbox"/> 15° <input type="checkbox"/> 20° <input type="checkbox"/> 30°	<input type="checkbox"/> On-o <input type="checkbox"/> DIM Triac <input type="checkbox"/> DIM Bluetooth <input type="checkbox"/> DIM DALI <input type="checkbox"/> DIM Zigbee

31201.120 | Underwater light



DIMENSION (mm)

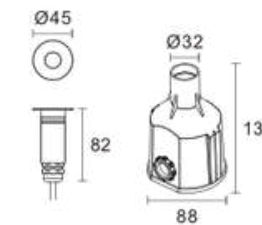


POWER SUPPLY
220-240V DC

LUMEN EFFICACY
65lm/W


CRI (Ra)
90

Light distribution

5.9W-15° 2700K



5.9W-30° 2700K




Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> Inox	<input type="checkbox"/> 5.9W	<input type="checkbox"/> 2700K <input type="checkbox"/> 3000K <input type="checkbox"/> 4000K	<input type="checkbox"/> 15° <input type="checkbox"/> 30°	<input type="checkbox"/> On-o <input type="checkbox"/> DIM Triac <input type="checkbox"/> DIM Bluetooth <input type="checkbox"/> DIM DALI <input type="checkbox"/> DIM Zigbee

31201.110 | Underwater light



DIMENSION (mm)

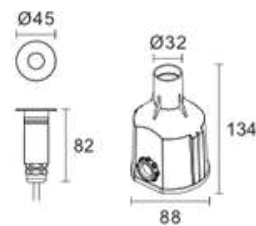


POWER SUPPLY
220-240V DC

LUMEN EFFICACY
20lm/W

CRI (Ra)
90

Light distribution

2W-105° 2700K




Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> Inox	<input type="checkbox"/> 2W	<input type="checkbox"/> 2700K <input type="checkbox"/> 3000K <input type="checkbox"/> 4000K	<input type="checkbox"/> 105°	<input type="checkbox"/> On-o <input type="checkbox"/> DIM Triac <input type="checkbox"/> DIM Bluetooth <input type="checkbox"/> DIM DALI <input type="checkbox"/> DIM Zigbee

31201.020 | Underwater light



DIMENSION (mm)

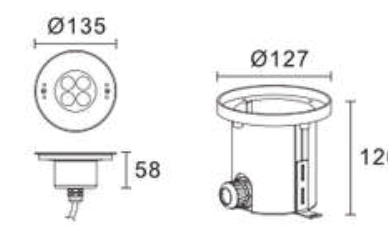


POWER SUPPLY
220-240V DC

LUMEN EFFICACY
56lm/W


CRI (Ra)
90

Light distribution


8.9W-20° 2700K




8.9W-35° 2700K



8.9W-25° 2700K



8.9W-45° 2700K



8.9W-30° 2700K



8.9W-45°35° 2700K




Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> Inox	<input type="checkbox"/> 8.9W	<input type="checkbox"/> 2700K <input type="checkbox"/> 3000K <input type="checkbox"/> 4000K	<input type="checkbox"/> 20° <input type="checkbox"/> 25° <input type="checkbox"/> 30° <input type="checkbox"/> 35° <input type="checkbox"/> 45° <input type="checkbox"/> 45°35°	<input type="checkbox"/> On-o <input type="checkbox"/> DIM Triac <input type="checkbox"/> DIM Bluetooth <input type="checkbox"/> DIM DALI <input type="checkbox"/> DIM Zigbee

31201.030 | Underwater light



DIMENSION (mm)

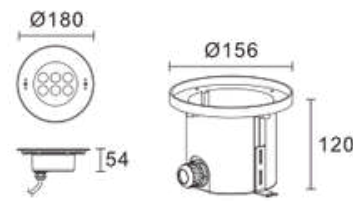


POWER SUPPLY
220-240V DC

LUMEN EFFICACY
54lm/W

CRI (Ra)
90

Light distribution

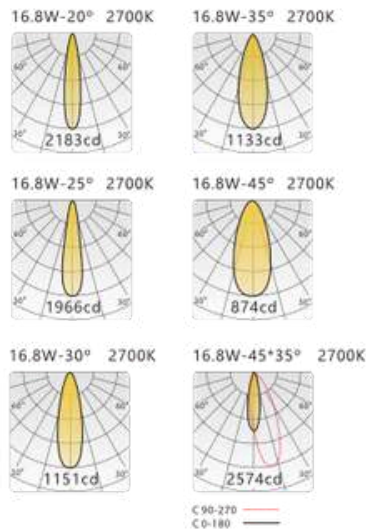


Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> Inox	<input type="checkbox"/> 16.8W	<input type="checkbox"/> 2700K <input type="checkbox"/> 3000K <input type="checkbox"/> 4000K <input type="checkbox"/> 5000K <input type="checkbox"/> 5700K	<input type="checkbox"/> 20° <input type="checkbox"/> 25° <input type="checkbox"/> 30° <input type="checkbox"/> 35° <input type="checkbox"/> 45° <input type="checkbox"/> 45*35°	<input type="checkbox"/> On-o <input type="checkbox"/> DIM Triac <input type="checkbox"/> DIM Bluetooth <input type="checkbox"/> DIM DALI <input type="checkbox"/> DIM Zigbee

31201.040 | Underwater light



DIMENSION (mm)

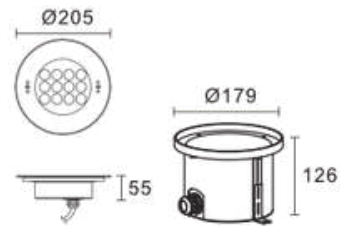


POWER SUPPLY
220-240V DC

LUMEN EFFICACY
56lm/W

CRI (Ra)
90

Light distribution

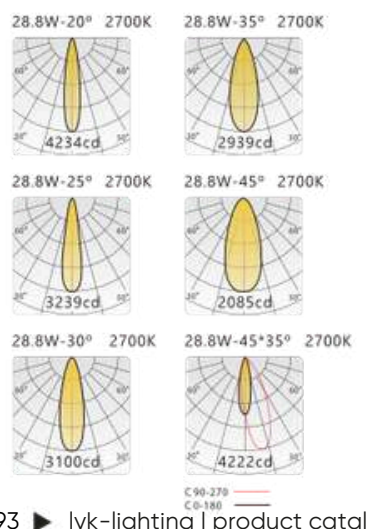

Information

Color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> Inox	<input type="checkbox"/> 28.8W	<input type="checkbox"/> 2700K <input type="checkbox"/> 3000K <input type="checkbox"/> 4000K	<input type="checkbox"/> 20° <input type="checkbox"/> 25° <input type="checkbox"/> 30° <input type="checkbox"/> 35° <input type="checkbox"/> 45° <input type="checkbox"/> 45*35°	<input type="checkbox"/> On-o <input type="checkbox"/> DIM Triac <input type="checkbox"/> DIM Bluetooth <input type="checkbox"/> DIM DALI <input type="checkbox"/> DIM Zigbee



Underwater light

SOLAR LIGHT


WL-HYL5015
BL-HYL4040

297
299





DEMONSTRATIONS

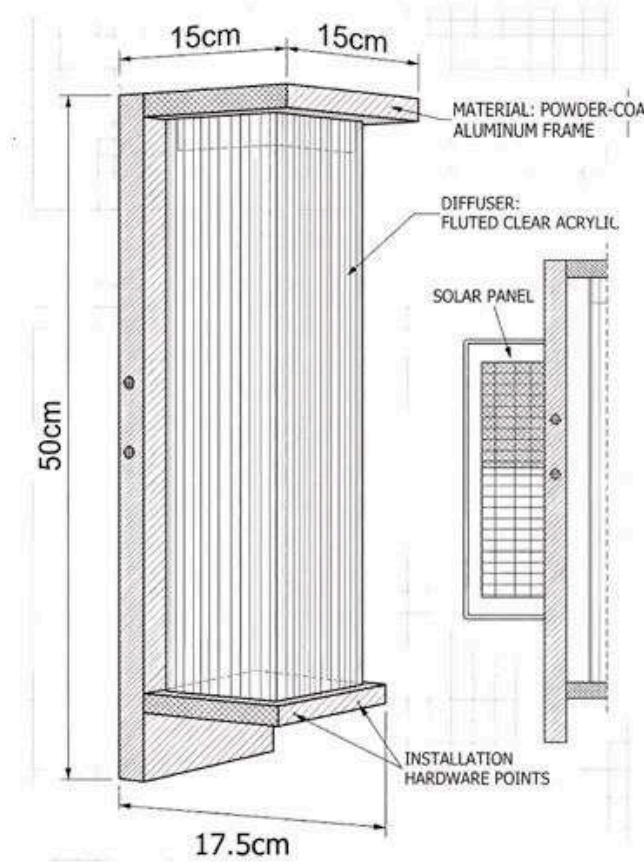

DEMONSTRATIONS

Dimension: D175 x 150 x H500mm
Input Voltage: 5.5V/2.5W (Solar)
Material: Stainless steel + Acrylic - Black color
Color Temperature (CCT): WarmWhite (Warm light)
IPRating: IP65
Other Specs: Battery 3.7V/ 4000mAh



SOLAR WALL SCONE



DEMENSIONS



DEMENSIONS


Dimension:

- **Loại 1:** L400 x W400 x H295 mm
- **Loại 2:** L500 x W500 x H355 mm

Input Voltage: 36V (Hỗ trợ Grid-tie: Solar + Utility power)

Color Temperature (CCT): WarmWhite (3000K)

IPRating: IP65

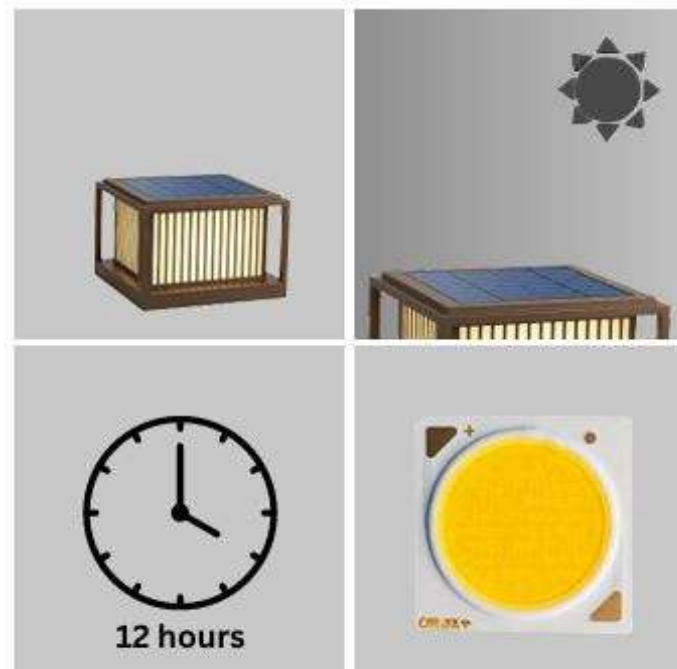

Solar Pedestal Light

Solar light



From the gathering of LED enthusiasts, we have come together to create unique and reliable lighting products. With an unwavering spirit of creativity and a desire for change, LYK set out to bring our clients' lighting design ideas into reality. This mission has become the core foundation of the LYK brand.

Since our journey began in 2017, LYK has had the opportunity to meet, learn from, and collaborate with many talented architects and experienced masters in the field of lighting. These encounters have fueled our inspiration and driven LYK to continuously improve and grow.

With creativity and perseverance, LYK constantly seeks innovative solutions to tackle challenges in technology and cost. We are always ready to face and overcome barriers to deliver effective and aesthetically pleasing lighting solutions for our clients' living and working spaces.

At LYK, we believe that light is not only a source of inspiration but also the driving force behind our continuous development and evolution. Our journey doesn't stop at creating perfect lighting; it is about changing how people perceive and experience their living spaces.

LYK Lighting



LYK COMPANY LIMITED

Address: 43TranMaiNinh Street, Ward 12, Tan Binh District,
Ho Chi Minh City, Vietnam
Hotline: +84 905 185 262
Email: lqnam@denledmythuat.com
Website: lyk-lighting.com



LYK LIGHTING COMPANY LIMITED

SHOWROOM

43-45 Tran Mai Ninh Street, Ward 12, Tan Binh District, Ho Chi Minh City

FACTORY

77 Tran Mai Ninh Street, Ward 12, Tan Binh District, Ho Chi Minh City

www.lyk-lighting.com